23 MAY 2002
2002030526

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau

(43) International Publication Date
5 July 2001 (05.07.2001)

PCT

(10) International Publication Number
WO 01/48621 A1

(51) International Patent Classification[7]: G06F 13/42

(21) International Application Number: PCT/US00/35520

(22) International Filing Date:
29 December 2000 (29.12.2000)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
09/474,058 29 December 1999 (29.12.1999) US

(71) Applicant: **INTEL CORPORATION** [US/US]; 2200 Mission College Boulevard, P.O. Box 58119, Santa Clara, CA 95052-8119 (US).

(72) Inventors: **SINGH, Gurbir**; 2104 N.W. 53rd Street, Gig Harbor, WA 98335 (US). **GRENIER, Robert, J.**; 16245 N.W. Gianola Court, Beaverton, OR 97006 (US). **PAWLOWSKI, Stephen, S.**; 6624 S.W. 158th Avenue, Beaverton, OR 97007 (US). **HILL, David, L.**; 37000 S.W. Goddard Road, Cornelius, OR 97113 (US). **PARKER, Donald, D.**; 16170 N.W. Somerset Drive, Beaverton, OR 97006-7225 (US).

(74) Agent: **SKWIERAWSKI, Paul, J.**; Antonelli, Terry, Stout & Kraus, LLP, Suite 1800, 1300 North Seventeenth Street, Arlington, VA 22209 (US).


(81) Designated States *(national)*: AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZW.

(84) Designated States *(regional)*: ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

Published:
— *With international search report.*

[Continued on next page]

(54) Title: QUAD PUMPED BUS ARCHITECTURE AND PROTOCOL

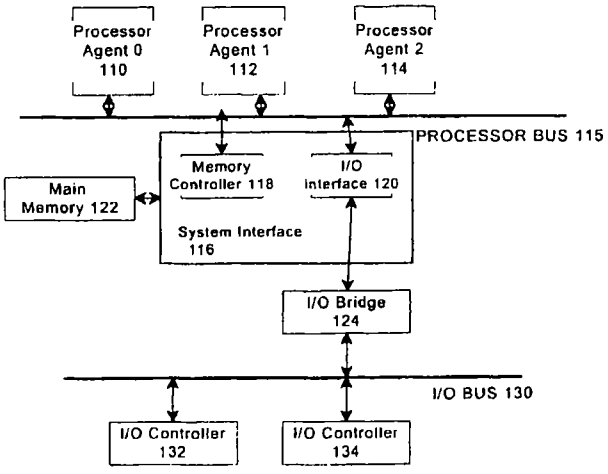

162162

ACTION

(57) Abstract: A bidirectional multidrop processor bus is connected to a plurality of bus agents. Bus throughput can be increased by operating the bus in a multi pumped signaling mode in which multiple information elements are driven into a bus by a driving agent at a rate that is a multiple of the frequency of the bus clock. The driving agent also activates a strobe to identify sampling points for the information elements. Information elements for a request can be driven, for example, using a double pumped signaling mode in which two information elements are driven during one bus clock cycle. Data elements for a data line transfer can be driven, for example, using a quad pumped signaling mode in which four data elements are driven during one bus clock cycle. Multiple strobe signals can be temporarily activated in an offset or staggered arrangement to reduce the frequency of the strobe signals. Sampling symmetry can be improved by using only one type of edge (e.g., either the rising edges or the falling edges) of the strobe signals to identify the sampling points.

WO 01/48621 A1

— *Before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments.*

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.