

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
5 April 2007 (05.04.2007)

PCT

(10) International Publication Number
WO 2007/037924 A3

(51) International Patent Classification:
F16F 7/00 (2006.01)

(21) International Application Number:
PCT/US2006/034567

(22) International Filing Date:
6 September 2006 (06.09.2006)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
11/233,283 22 September 2005 (22.09.2005) US

(71) Applicant (for all designated States except US): **THE PULLMAN COMPANY** [US/US]; 33 Lockwood Road, Milan, OH 48846 (US).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **RODECKER, Troy, P.** [US/US]; 12908 Arlington Road, Berlin Heights, OH 44814 (US).

(74) Agents: **MILLER, Keith, H.** et al.; **HARNESS, DICKY & PIERCE, P.L.C.**, P.O. Box 828, Bloomfield Hills, MI 48303 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LV, LY, MA, MD, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.


(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

- as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))
- as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii))

[Continued on next page]

(54) Title: ISOLATOR

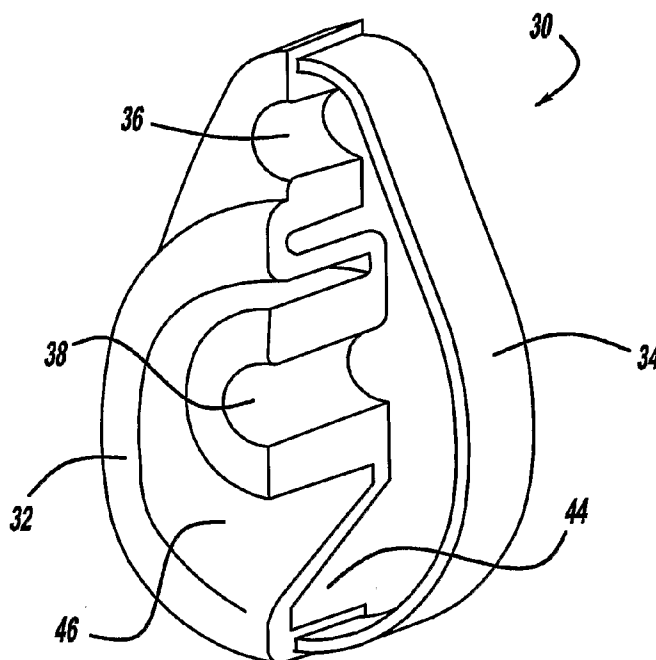

(57) Abstract: An elastomeric isolator has an elastomeric body which defines a void extending into the elastomeric body from one side and a void extending into the elastomeric body from the opposite side. One member for attaching the elastomeric body to a component is located inside of the two voids and another member for attaching the elastomeric body to a component is located outside of the two voids. The two voids overlap a specified distance to determine the stresses and stiffness for the isolator.

WO 2007/037924 A3



Published:

- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(88) Date of publication of the international search report:

29 November 2007