

REPLACED SHEETS		SG
☒	Description : paged to paged	
☒	Claim(s) : paged to paged	
☐	Drawing(s) : paged to paged	
☒	Abstract : paged to paged	
DATE OF RECEIPT		

SG 9604730-3
RTMP/S COPY
105

Device and process for the comminution of materials

The present invention concerns a device and process for the comminution of materials, such as comminutable material originating from industries or from private households. In particular, the present invention concerns the comminution of difficultly recyclable wastes, especially those from cutting processes, e.g. metal shavings, cheque cards, tapes and the like.

Metal shavings represent a problem since they occur in large volume and thus take up considerable transportation space in the case of disposal, i.e. the return to the steel production.

Therefore, one has already tried to comminute the wool-like shavings, e.g. to tear up with rotating knives, which does not lead to the desired result because, on the one hand, introduction into the effective range of the knives makes problems since the material springs back very strongly and, on the other hand, rapidly rotating knives are jammed by the metal shavings.

Tapes and similar film-like articles tend to wind around the comminution device, which leads to frequent interruptions.

Similar problems arise in the case of the comminution of household waste, for which reason reliable, small devices are not on the market.

Therefore, the present invention has set itself the task of providing a device with the help of which comminutable industrial waste and material from the private household can be comminuted in a very simple and reliable way, whereby, furthermore, it is also ensured that the cleaning of the device, e.g. in the case of change of the supplied material to be comminuted, is possible in a very easy way.

The solution of this task takes place in the case of a device for the comminution of materials consisting



of a housing, as well as interacting cutting elements housed therein, whereby the cutting elements consist of rows of knives spaced apart and engaging each other comb-like with an upwardly widening angle and the knives simultaneously carry out a scissor-like movement and also, with the help of a crank, a turning movement around an axis.

The comminution process takes place as follows: The comb-like engaging cutting bars are moved against one another with relatively low frequency in a scissor-like manner, whereby, in the upper part of the V-shaped introducing wedge, the material is compacted. Compacted material needs less space and, therefore, is moved to the lower part of the introducing wedge until it is gripped by the cutting bar and is cut or broken up. Since the process can take place relatively slowly, no all too great forces are necessary for the swivelling movement so that, in principle, this can be carried out manually.

However, simultaneously with the scissor-like movement, because of the crank drive, an up and down movement of the knives takes place, whereby the angle between the knives is reduced in the case of the downward movement and the material to be comminuted is thereby drawn into the cutting region.

The simultaneous cutting movement and the swivel movement resulting by the crank can, in principle, be provided according to the invention in two ways. First, the knives can be assembled in a frame and be rigidly combined with one another, whereby the frame is coupled to a shaft via one or more lower bridges so that the bridge is forced around the shaft by the engaging movement and the knives are thus swivelled on a circular path with the radius of the length of the bridge. In the case of this solution, it is advantageous to close the frame (rigidly) fixed to the bridge via a lower shank and to let the knives



of the counter frame to pass through in comb-like way and to allow to rest on the lower shank.

A further very important advantage of the solution according to the invention is that the cutting device can be very easily removed from the device, which considerably simplifies the changing of the tools or the cleaning of the device. Since the cutting combs grip through one another and are open at the lower side, they can easily be pulled out after removing the upper bearing.

The knife frames can be correlated in their intermediate spaces with wiping elements which are fixed, for example, on the opposite walls of the housing.

The invention is not restricted to opposing, plain cutting elements; the elements can be formed angular or rounded along the cutting line, whereby e.g. also the cutting region has its deepest point in the middle. For this purpose, it is merely necessary individually to mount the knife frames of the second element each separately movable. Besides the low working frequency, a relatively short swivelling movement is, in most cases, sufficient for the comminution, so that the device can be of small construction. Since e.g. the shavings are produced continuously in the case of turning and also in the case of use of such a device in the household, only small quantities are to be comminuted and a short-time processing of large volumes is not necessary, small single station devices can also be produced at low cost.

Similarly, no high requirement is made for the motor capacity since very high transmission ratios are possible. Advantageously, the motor thereby drives an eccentric with which is fixed the upper rim of the frame of the first cutting element, preferably on both ends, and whereby preferably both cutting elements are moved towards each other. Such a drive



-11-

is constructionally not expensive and of great durability.

Furthermore, the above-mentioned springing back of the material to be comminuted can, according to the invention, be reduced by rows of barbed teeth with horizontal teeth flanks, arranged above the cutting bar, which hold down the material in the case of compacting and simultaneously additionally deform it.

The second cutting element which can pass through the first one is advantageously detachably connected with the wall of the housing in order to be able to remove this for cleaning purposes. For this purpose, at the end on the upper fixing of the second cutting element, e.g. spring-loaded pins can be provided which engage with appropriate pocket holes at the end of the bearing or the second element is simply stuck into the bearing.

The first cutting element can also be removably connected with its bearing and its motor.

A second possibility of the overlapping of cutting and swivelling movements produced by the crank consists in mounting the knives on a crank shaft and fixing the former against arms which rest on both sides near the cutting region, instead of mounting it against the rotatably-mounted bridge, or the shank which on the lower side connects the cutting comb. In this way, on the crank shaft can be provided separate eccentrics for each knife so that e.g. in the case of offsetting in each case of 90° , only every fourth knife (of e.g. about 20) runs with identical movement.

The arms can be supported by pneumatic springs relative to the housing so that these move backwards in case of overload and prevent the destruction of the knives.

Advantageously, as also in the case of the above-described embodiment form, the knives can have a

saw-like shape and/or be bulged towards the cutting region.

Furthermore, a further important improvement of the present invention consists in saw discs being mounted between the knives. These grip through the gaps necessarily present between the knives for the reception of the opposite-lying ones and are so dimensioned and mounted that the teeth of the saw discs project over the knives in the case of their backwards movement, remove attached parts, possibly comminute against the knives and transport downwardly to the lower cutting region, i.e. the turning direction of the saw discs is not the same as the opposite-lying ones.

In the case of the bringing together of the knives and the swivelling inwardly and downwardly thereby taking place, the knives again move beyond the saw discs and possibly again remove adhering material from the discs so that the knives and the saw discs mutually clean each other alternately.

Below the knives, a drawer is provided which collects the emerging small material. Several drawers can be placed on top of one another so that in the case of changing the material to be comminuted (change from synthetic material to food residues or cardboard etc.) different drawers can also be inserted in which the material can be collected.

The motor for driving the knives is preferably equipped with an overload protection which turns off if the power consumption is too high, which is necessary if accidentally parts are inserted which cannot be comminuted in order thereby to protect the knife frames against destruction.

In addition, the safeguard is so arranged that, after the stopping of the cutting movement, the cutting elements are drawn back into the starting position, i.e. the biggest opening angle.

The knife frames can be provided with wiping elements projecting into their gaps which can e.g. be fixed to the opposite-lying walls of the housing.

It is suggested to close the housing with a swivellable closure, whereby this is connectable with the motor or its housing and the eccentric is swivellably mounted in such a way that, in the case of opening of the closure, the first cutting element is drawn back to the biggest opening angle. This connection can be released so that the space behind the cutting element is accessible for cleaning purposes.

In the inside of the device, nozzles for the introduction of cleaning fluid can be provided which e.g. free the above-mentioned shavings from adhering drill fluids so that the comminuted shavings can be worked up directly.

The present invention is explained in more detail by the embodiment example with reference to the accompanying Figures.

Figure 1 shows this in three dimensional view

Figure 2 shows the functional scheme

Figure 3 shows an embodiment form with double sided crank drive.

The device consists of a housing 1 with the two cutting elements 2, 3 provided therein. The cutting elements each have rows of knife bars 4, which engage in the lower region and thereby form a row of scissors.

The cutting element 2, shown in Figure 1 on the left, has a frame 5 to which the knife bars are fixed, whereby the knife bars of the second cutting element 3, shown on the right, rest on the lower shank 6 of the frame 5 or are pressed against this during the cutting process.

The first cutting element 2 has bridges 7 fixed on both sides of the frame which are mounted via a shaft 16 and shift the turning axle with regard to the lower

edge of the frame 5 backwards in the direction of the wall of the housing, so that a turning of the first element around the shaft 16 simultaneously with the change of the angle produces an upward or downward movement.

The second cutting element 3 is open on its lower side and can be inserted between the knife bar 4 of the first cutting element 2 or removed therefrom.

The second cutting element 3 is turnably mounted on the upper end to the oppositely-lying wall of the housing by a shaft 17, whereby the connection with the wall of the housing is releasable, e.g. by spring-loaded pins (not shown) engaging from the outside into pocket holes, in order to be able to withdraw the second cutting element 3 after opening of the cover 14 for the cleaning of the knives and/or the interior. In especially preferred way, the shaft 17 (together with the cutting element 3) is inserted into the housing or a fixture attached to this. Above the cutting elements 2, 3, movable teeth rows 11 with horizontal tooth flanks 15 are present which are tilted downwardly and thereby hold the inserted material in a barb-like manner.

The teeth can be especially closer to each other than shown and also engage into one another in order to compact and to form the material to be comminuted before the gripping by the knife bars.

The first cutting element 2 is turnably mounted on an eccentric 10 around the axis 16, whereby this is connected via a connecting rod with the axis 19 and is set in motion by a motor drive 9.

The motor 9 can be present in its own motor housing 20.

The cover 14 is tiltably mounted on the housing in bearings 22. The motor housing 20 is also tiltable by bearings 22. This motor housing 20 is connected via the eccentric 10 with the first

cutting element 2 in such a way that, by tilting back of the cover 14, around the pins 21, the first cutting element 2 is brought from its upright position into an illustrated backward position in order to provide the biggest possible filling space.

For cleaning purposes, the pins 21 can be withdrawn and thereby the motor housing 20 and thus the cutting element 2 brought into a lower or upright position.

Below the cutting elements, collecting containers in the form of drawers 12 can be provided into which the comminuted material falls, whereby, for different materials, superimposed exchangeable drawers are possible. The knife bars 4 can be combined with movable or rigid wipers 13 by special fixings 21.

Figure 2 shows the two interengaging cutting elements 2 and 3, whereby the first one is rotatably mounted around the point P_1 which lies outside of the plane of the element so that all points of the element move in circular paths K_1 around P_1 and, besides the horizontal one, show a significant vertical movement.

The element 3 is turnable around P_2 , all points moving on circular paths K_2 with a predominantly horizontal component in the case of change of the cutting angle α , whereby the knives of the element rest on the shank 6 of the first element, i.e. are pressed down by the material to be comminuted. In principle, a circular path K_2 , can also be produced when the turning point P_2 is displaced via an additional lever P_2 , in order also to impart to the second cutting element 3 a bigger downward component. P_2 and P_2 , can, in principle, also lie lower than shown in order e.g. to strengthen the compacting before the cutting.

Force A used for the comminuting acts on the top of the first cutting element A (eccentric drive). An additional drive A' of the second element is possible but necessitates its dismantling before pulling out.

Furthermore, it is possible also to rotate both rows of knives on their upper end and also to provide them individually with lower bearings, which provides the possibility that the devices give way if a pre-determined force is exceeded. In arising of such a case, the knife rows with the device move outwardly and open the cutting gap, so that non-comminuted material (e.g. with hardness close to or greater than the hardness of the knife) can emerge below without damaging the knives.

Figure 3 shows an especially preferred embodiment form of the present invention, in which the oppositely-lying, interengaging rows of the knives 4 (for a better view, only the left row is shown) are mounted on the head end in an eccentric shaft 23 which are, in each case, driven via a chain 28 by the motors 29. The eccentrics can e.g. be positioned at an angle of 90° towards each other.

Furthermore, the knives 4 can be curved as illustrated, i.e. means bulging inwardly and provided with teeth 24.

The knives lie below against outer swivel frames 25 which are supported via pneumatic springs 30, whereby the spring pressure is matched with the strength of the knives so that they can give way when overloaded.

Between the knives 4 are placed saw discs 26 which lie in the gaps formed by the interengaging knives and their diameter and arrangement on the axis 32 is so chosen that, in the case of downward movement of the knives 4, they are covered by these and, in the case of drawing out, they project into the cutting region 27. and, in this way, even comminute material adhering against the knives 4 and, on the other hand, clean these and convey the material downwardly.

The saw discs 26 can also be supported by pneumatic springs, they are driven via the eccentric shaft 23 by chains 28, 28'. Furthermore, as shown, the arm 25 and the saw disc axes 32 rest on a support pair 33 tiltably positioned on both sides of the knife 4 and, in addition, the saw discs 26 can be connected to a sliding clutch 31 so that these can stop for a short time and, after wiping off of the knives 4, can be started again.

List of references

- 1 housing
- 2, 3 cutting elements
- 4 knife
- 5 frame
- 6 shank
- 7 bridge
- 8 joint
- 9 motor drive
- 10 eccentric drive
- 11 teeth rows
- 12 drawers
- 13 wiper
- 14 cover
- 15 teeth flanks
- 16, 17 shafts
- 18 connecting rod
- 19 axis (bolt)
- 20 motor housing
- 21 catch pin
- 22 bearing for cover 14 and motor housing 20
(with ratchet)
- 23 eccentric shaft
- 24 teeth
- 25 swivel arm
- 26 saw disc
- 27 cutting region
- 28, 28' chain
- 29 motor
- 30 pneumatic springs
- 31 sliding clutch
- 32 saw disc axis
- 33 support



-12-

Patent Claims

1. Device for the comminution of materials, consisting of a housing (1), as well as interacting cutting elements (2, 3)-housed therein, characterised in that the cutting elements consist of rows of knives (4) spaced apart and engaging with one another in a comb-like manner at an angle widening upwardly and the knives are drivable in such a manner that they simultaneously carry out a scissor-like movement and also, with the help of a crank drive (7, 16, 23), a swivelling movement around an axis (16, 23) of the crank drive.
2. Device according to claim 1, characterised in that the knife bars (4) of the first cutting element (2) are held in a frame (5) with a lower horizontal shank (6) and are tiltable over backwardly extending bridges (7) fixed to the frame (5) around a joint (8) positioned near the wall of the housing, so that the first cutting element (2), in the case of turning around the joint (8) in the cutting zone, simultaneously makes a downward movement and that the second cutting element (3) has knife bars (4) which are open downwardly which rest on the lower shank (6) of the frame (5) of the first cutting element (2), whereby the knife bars (4) are connected (rotatably) with an upper bearing.
3. Device according to claim 1 or 2, characterised in that the first cutting element (2) is pivotable by a motor drive (9).
4. Device according to at least one of claims 1 to 3, characterised in that the motor drive (9) is an eccentric drive (10).
5. Device according to at least one of claims 1 to 4, characterised in that opposing downwardly inclined teeth rows (11) with horizontal flanks (15) are positioned above the cutting elements (2,3).




* C L M S *



-13-

6. Device according to at least one of claims 1 to 5, characterised in that the downwardly open second cutting element (3) is detachably fixed to the housing (1) and removable therefrom.
7. Device according to at least one of claims 1 to 6, characterised in that drawers (12) for the reception of the comminuted material are provided below the cutting elements (2, 3).
8. Device according to at least one of claims 1 to 7, characterised in that wipers (13) lie adjacent to the knife bars (4).
9. Device according to at least one of claims 1 to 8, characterised in that the knives (4) are provided with teeth (24).
10. Device according to at least one of claims 1 to 9, characterised in that the knives are mounted on upper drivable eccentric shafts (23).
11. Device according to at least one of claims 1 to 10, characterised in that the knives (4) lie against lower swivel arms (25).
12. Device according to at least one of claims 1 to 11, characterised in that the knives (4) are curved.
13. Device according to at least one of claims 1 to 12, characterised in that saw discs (26) are positioned in the gaps between the knives (4) in such a manner that they overlap into the cutting region when the knives (4) are moved to an outward position and are covered by the knives in their inwardly turned position.
14. Device according to at least one of claims 1 to 13, characterised in that drawers (12) for the reception of the comminuted material are provided below the cutting elements (2, 3).
15. Device according to one or more of claims 1 to 14, characterised in that the motor (9) driving the cutting elements (2, 3) is provided with an overload safety device which stops the cutting movement in the case of overloading and returns the elements to the largest angle.



* C L M S *



-10-

16. Device according to one or more of claims 1 to 15, characterised in that the cover (14) of the housing (1) upon opening brings the motor housing (20) by means of pins (21) and thus, via a connecting rod (18), the cutting element (2) into the greatest possible backward position.

17. Device according to one or more of claims 1 to 16, characterised in that the motor housing (20) is turned downwardly by removing the pins (21) when the cover (14) is open and thus the cutting element (2) is brought into a vertical position.

18. Process for the comminution of material with the help of shear-like interacting rows of knives to be moved towards one another with formation of cutting gaps, characterised in that one impinges the knives hanging in V-form and converging downwardly with material to be comminuted coming from above, supports the knives below during the comminution, rotates the upper ends of at least one row, whereby the lower ends of the knives slide up and down on the support and the angle between the opposite-lying knives in the thereby produced cutting gap is periodically and continually formed in such a way that it comminutes in the case of inward and downward movement of the knives.

19. Process according to claim 18, characterised in that the knives are provided with a teething.

20. Process according to claim 18 or 19, characterised in that one rotates saw tooth discs between the knives which engage periodically in the cutting region during the turning movement caused by the upper rotation of the knives, thereby wipes off adhering material from the knives and conveys comminution material downwards into the cutting gap.



* C L H S *

21. Device according to one or more of claims 18 to 20, characterised in that the knives (4) are supported on their lower ends with a predetermined force and moved aside in the case of exceeding this force.

22. Device according to one or more of claims 18 to 21, characterised in that the knives are driven asynchronously and are successively brought into a cutting position.

This Sheet Has Been Replaced



* C L H S *

MATERIAL CRUSHING PROCESS AND DEVICE

ABSTRACT

A material crushing device has a housing (1) in which are housed cutting elements (2, 3) that move towards each other. The cutting elements consist of comb-like rows of spaced blades (4) that mesh with each other enclosing an upwardly open angle. The blades (4) carry out at the same time a shearing movement and a swivelling movement around an axis (16) by means of a crank mechanism (10).

Fig. 1

This Sheet Has Been Replaced



1/3



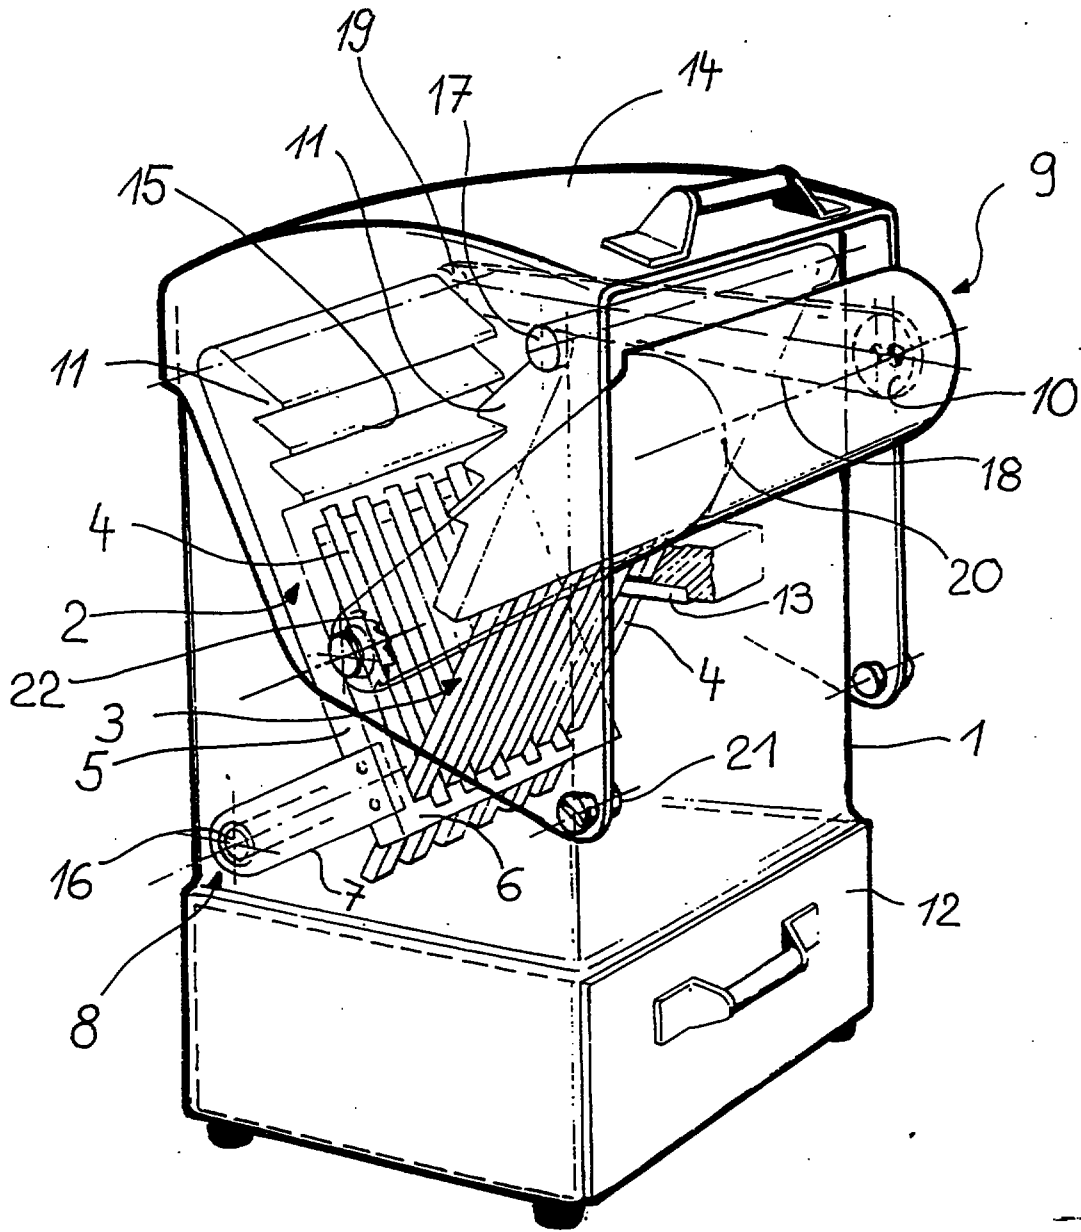


Fig. 1

2/3

Fig 2

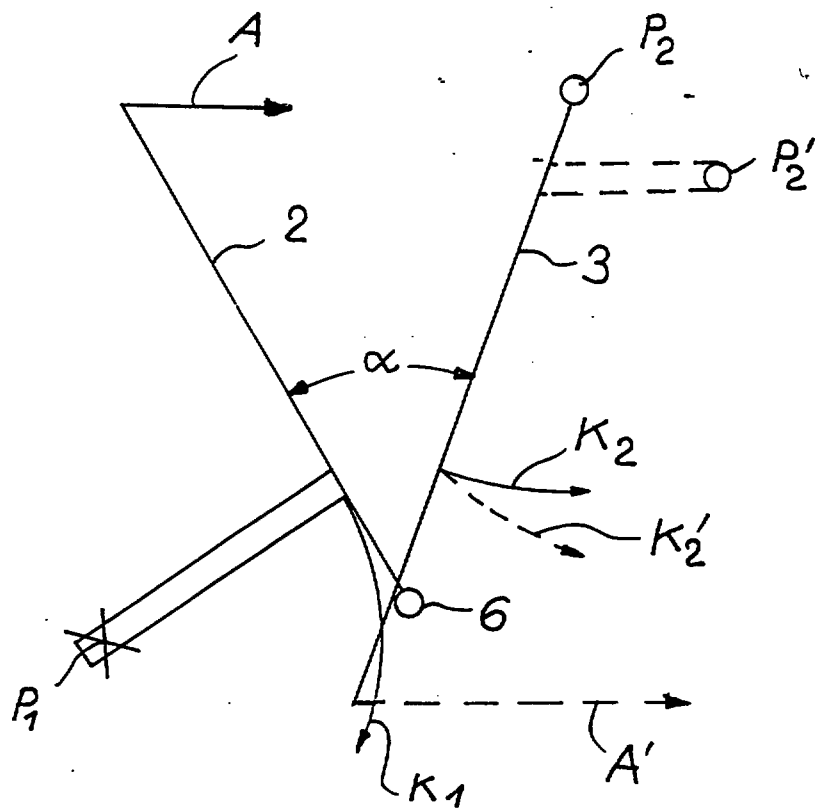

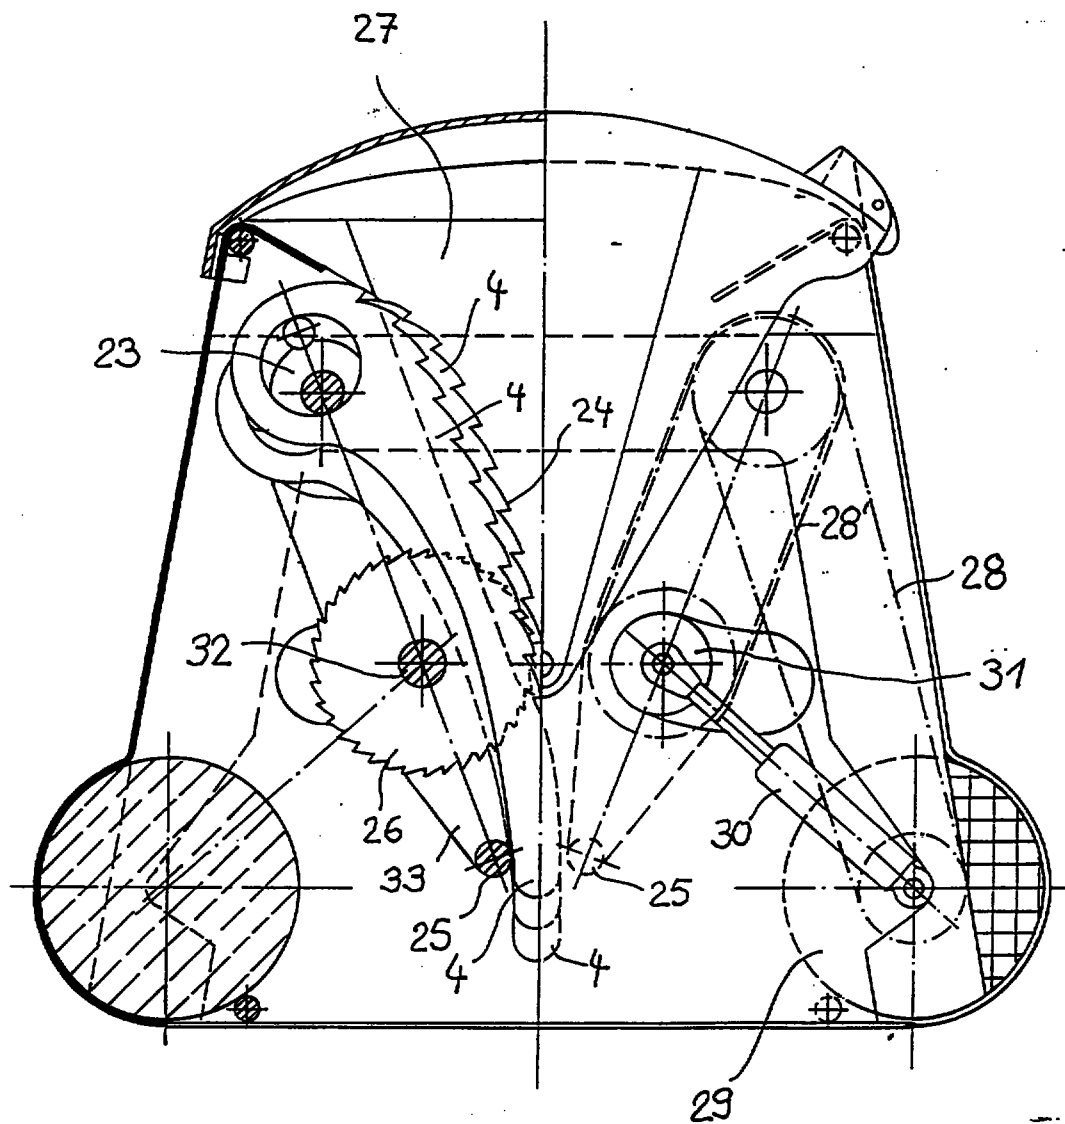

THIS SHEET HAS BEEN
REPLACED

-1-

REPLACEMENT SHEET

12 DEC 1996

5

MATERIAL CRUSHING PROCESS AND DEVICE

The present invention concerns a device and process for the comminution of materials, such as comminutable material originating from industries or from private households. In particular, the present invention concerns the comminution of difficultly recyclable wastes, especially those from cutting processes, e.g. metal shavings, cheque cards, tapes and the like.

Metal shavings represent a problem since they occur in large volume and thus take up considerable transportation space in the case of disposal, i.e. the return to the steel production.

Therefore, one has already tried to comminute the wool-like shavings, e.g. to tear up with rotating knives, which does not lead to the desired result because, on the one hand, introduction into the effective range of the knives makes problems since the material springs back very strongly and, on the other hand, rapidly rotating knives are jammed by the metal shavings.

Tapes and similar film-like articles tend to wind around the comminution device, which leads to frequent interruptions.

Similar problems arise in the case of the comminution of household waste, for which reason reliable, small devices are not on the market.

Therefore, the present invention has set itself the task of providing a device with the help of which comminutable industrial waste and material from the private household can be comminuted in a very simple and reliable way, whereby, furthermore, it is also ensured that the cleaning of the device, e.g. in the case of change of the supplied material to be comminuted, is possible in a very easy way.

The solution of this task takes place in the case of a device for the comminution of materials consisting

This Sheet Has Been Replaced



5-0873038

-1-

MATERIAL CRUSHING PROCESS AND DEVICE

The present invention concerns a device and process for the comminution of materials, such as comminutable material originating from industries or from private households. In particular, the present invention concerns the comminution of difficultly recyclable wastes, especially those from cutting processes, e.g. metal shavings, cheque cards, tapes and the like.

Metal shavings represent a problem since they occur in large volume and thus take up considerable transportation space in the case of disposal, i.e. the return to steel production.

Therefore, one has already tried to comminute the wool-like shavings, e.g. to tear up with rotating knives, which does not lead to the desired result because, on the one hand, introduction into the effective range of the knives makes problems since the material springs back very strongly and, on the other hand, rapidly rotating knives are jammed by the metal shavings.

Tapes and similar film-like articles tend to wind around the comminution device, which leads to frequent interruptions.

Similar problems arise in the case of the comminution of household waste, for which reason reliable, small devices are not on the market.

For the comminution of materials, devices are known with comb-like, interengaging knife or bar rows, extending from above downwardly and forming a wedge-shaped cutting gap, see e.g. DE-A-24 20 913 and US-A 33 46 202. However, the cutting elements thereby perform an oscillating movement, i.e. forwards and backwards movement of the scissor-like cutting movement take place on precisely the same path. The above-mentioned materials can thus not be satisfactorily comminuted.

REPLACEMENT SHEETS		SG
☒	Description	: paged 122 ²¹³ to paged 122
☒	Table(s)	: paged 122 to paged 122
☐	Drawing(s)	: paged 122 to paged 122
☒	Abstract	: paged 122 to paged 122
DATE OF RECEIPT 15/12/97		

This is the replacement sheet

Date: 15 DEC 1997

Therefore, the present invention has set itself the task of providing a device with the help of which comminutable industrial waste and material from the private household can be comminuted in a very simple and reliable way, thereby, furthermore, it is also ensured that the cleaning of the device, e.g. in the case of change of the supplied material to be comminuted, is possible in a very easy way.

According to the invention, the solution of this task takes place with a device having the features of the main claim, advantageous embodiments being found in the subsidiary claims.

The comminution process takes place as follows: The comb-like engaging cutting bars are moved against one another with relatively low frequency in a scissor-like manner, whereby, in the upper part of the V-shaped introducing wedge, the material is compacted. Compacted material needs less space and, therefore, is moved to the lower part of the introducing wedge until it is gripped by the cutting bar and is cut or broken up. Since the process can take place relatively slowly, no all too great forces are necessary for the swivelling movement so that, in principle, this can be carried out manually.

However, simultaneously with the scissor-like movement, because of the crank drive, an up and down movement of the knives takes place, whereby the angle between the knives is reduced in the case of the downward movement and the material to be comminuted is thereby drawn into the cutting region.

The simultaneous cutting movement and the swivel movement resulting by the crank can, in principle, be provided according to the invention in two ways. First, the knives can be assembled in a frame and be rigidly combined with one another, whereby the frame is coupled to a shaft via one or more lower bridges.

This is the replacement sheet

Date: 15 DEC 1997

2A

so that the bridge is forced around the shaft by the engaging movement and the knives are thus swivelled on a circular path with the radius of the length of the bridge. In the case of this solution, it is advantageous to close the frame (rigidly) fixed to the bridge via a lower shank and to let the knives of the counter frame to pass through in comb-like way and to allow to rest on the lower shank.

This is the replacement sheet

Date: 15 DEC 1997

of the counter frame to pass through in comb-like way and to allow to rest on the lower shank.

A further very important advantage of the solution according to the invention is that the cutting device can be very easily removed from the device, which considerably simplifies the changing of the tools or the cleaning of the device. Since the cutting combs grip through one another and are open at the lower side, they can easily be pulled out after removing the upper bearing.

The knife frames can be correlated in their intermediate spaces with wiping elements which are fixed, for example, on the opposite walls of the housing.

The invention is not restricted to opposing, plain cutting elements; the elements can be formed angular or rounded along the cutting line, whereby e.g. also the cutting region has its deepest point in the middle. For this purpose, it is merely necessary individually to mount the knife frames of the second element each separately movable. Besides the low working frequency, a relatively short swivelling movement is, in most cases, sufficient for the comminution, so that the device can be of small construction. Since e.g. the shavings are produced continuously in the case of turning and also in the case of use of such a device in the household, only small quantities are to be comminuted and a short-time processing of large volumes is not necessary, small single station devices can also be produced at low cost.

Similarly, no high requirement is made for the motor capacity since very high transmission ratios are possible. Advantageously, the motor thereby drives an eccentric with which is fixed the upper rim of the frame of the first cutting element, preferably on both ends, and whereby preferably both cutting elements are moved towards each other. Such a drive

This is the replacement sheet

Date: 15 DEC 1997

CLAIMS

1. Device for the comminution of materials, consisting of a housing, as well as interacting first and second cutting elements housed therein, whereby the cutting elements consist of rows of knives spaced apart and engaging with one another in comb-like manner, characterised in that the knives are drivable in such a manner that they simultaneously carry out a scissor-like movement and also, with the help of a crank drive, a swivelling movement around an axis, whereby the knives of at least one cutting element are mounted on upper drivable eccentric shafts and whereby either the knives of one cutting element are supported against a lower shank connected with the knives of the opposite-lying cutting element or whereby the knives lie against lower swivel arms.
2. Device according to claim 1, characterised in that the knives of the first cutting element are tiltable via bridges extending backwardly from a frame around a joint provided near the housing wall.
3. Device according to claim 1 or 2, characterised in that the first cutting element is pivotable by a motor drive.
4. Device according to at least one of claims 1 to 3, characterised in that the motor drive is an eccentric drive.
5. Device according to at least one of claims 1 to 4, characterised in that opposing downwardly inclined teeth rows with horizontal flanks are positioned above the cutting elements.
6. Device according to at least one of claims 1 to 5, characterised in that the downwardly open second cutting element is detachably fixed to the housing and removable therefrom.
7. Device according to at least one of claims 1 to 6, characterised in that drawers for the reception of the

This is the replacement sheet



* C L H S *

Date: 15 DEC 1997

comminuted material are provided below the cutting elements.

8. Device according to at least one of claims 1 to 7, characterised in that wipers lie adjacent to the knife bars.

9. Device according to at least one of claims 1 to 8, characterised in that the knives are provided with teeth.

10. Device according to at least one of claims 1 to 9, characterised in that the knives are curved.

11. Device according to at least one of claims 1 to 10, characterised in that saw discs are positioned in the gaps between the knives in such a manner that they overlap into the cutting region when the knives are moved to an outward position and are covered by the knives in their inwardly turned position.

12. Device according to one or more of claims 1 to 11, characterised in that the motor driving the cutting elements is provided with an overload safety device which stops the cutting movement in the case of overloading and returns the elements to the largest angle.

13. Device according to one or more of claims 1 to 12, characterised in that a cover of the housing upon opening brings a motor housing into the greatest possible backward position by means of pins and thus, via a connecting rod, the first cutting element into the greatest possible backward position.

14. Device according to one or more of claims 1 to 13, characterised in that the motor housing is turned downwardly by removing the pins when the cover is open and thus the first cutting element is brought into a vertical position.

15. Process for the comminution of materials with the help of shear-like interacting rows of knives to be moved towards one another with formation of cutting gaps, whereby one impinges the knives which hang in a V-formation and converge downwardly with material to be

This is the replacement sheet



* C L M S *

Date: 15 DEC 1997

comminuted coming from above and supports the knives below during the comminution, characterised in that one sets in rotation the upper ends of at least one row, whereby the lower ends of the knives slide up and down on the support.

16. Process according to claim 15, characterised in that one rotates saw tooth discs between the knives which engage periodically in the cutting region during the turning movement caused by the upper rotation of the knives, thereby wipes off adhering material from the knives and conveys comminution material downwards into the cutting gap.

17. Process according to one or more of claims 15 or claim 16, characterised in that the knives are supported on their lower ends with a predetermined force and moved aside in the case of exceeding this force.

18. Process according to any one of claims 15 to 17, characterised in that the knives are driven asynchronously and are successively brought into a cutting position.



This is the replacement sheet

Date: 15 DEC 1997

MATERIAL CRUSHING PROCESS AND DEVICE

ABSTRACT

A material crushing device has a housing (1) in which are housed cutting elements (2, 3) that move towards each other. The cutting elements consist of comb-like rows of spaced blades (4) that mesh with each other enclosing an upwardly open angle. The blades (4) carry out at the same time a shearing movement and a swivelling movement around an axis (16) by means of a crank mechanism (10).

Fig. 1

This is the replacement sheet

Date: 15 DEC 1997