

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
25 September 2003 (25.09.2003)

PCT

(10) International Publication Number
WO 03/078011 A2

(51) International Patent Classification⁷: A63H 3/16, 3/46

(74) Agent: LEE, Ai, Ming; 80 Raffles Place, #33-00 Uob Plaza I, Singapore 048624 (SG).

(21) International Application Number: PCT/SG03/00029

(22) International Filing Date: 25 February 2003 (25.02.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
60/359,353 25 February 2002 (25.02.2002) US
10/113,967 29 March 2002 (29.03.2002) US

(71) Applicant: STIKFAS PTE LTD [SG/SG]; 39 Ean Kiam Place, Singapore 429124 (SG).


(72) Inventor: BAN, Yinh, Jheow; Block 503, #10-738, Hougang Ave 8, Singapore 530503 (SG).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: TOY FIGURE HAVING PLURALITY OF BODY PARTS JOINED BY BALL AND SOCKET JOINTS

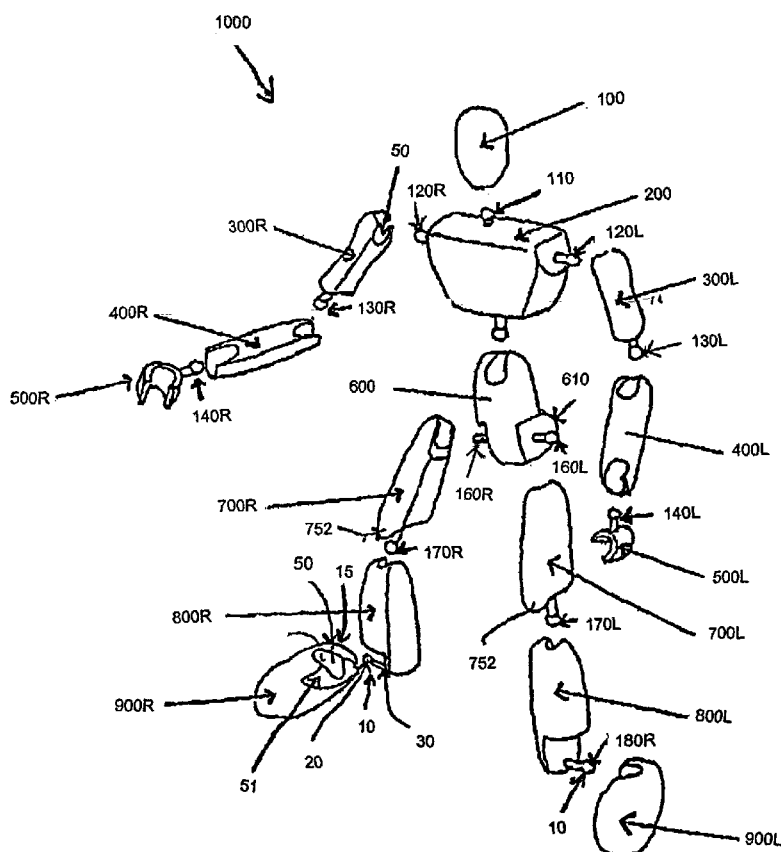

(57) Abstract: An articulated toy figure (1000) comprising a plurality of body parts each operatively adapted to be adjoined one to another by a ball-socket joint arrangement, each ball-socket joint arrangement having a ball portion (10) protruding from a region of a body part and also having a corresponding socket portion (15) located in an adjoining body part, the ball portion (10) having a knob (20) supported on a shaft (30), the socket portion (15) having a socket which rotatably receives the knob (20), wherein, in one or more of the ball-socket joint arrangements the socket portion (15) is provided with a contoured cavity arrangement (50) having the socket in its interior, the contoured cavity arrangement (50) limiting the extent of movement of the shaft (30) therewithin.



Published:

— without international search report and to be republished upon receipt of that report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.