

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

**(19) World Intellectual Property Organization
International Bureau**



162162

(43) International Publication Date
25 July 2002 (25.07.2002)

PCT

(10) International Publication Number
WO 02/057632 A3

(51) International Patent Classification⁷: **F04B 17/00**

(74) Agents: RAZZANO, Pasquale, A. et al.; Fitzpatrick, Cella, Harper & Scinto, 30 Rockefeller Plaza, New York, NY 10112-3800 (US).

(21) International Application Number: PCT/US02/01037

(22) International Filing Date: 16 January 2002 (16.01.2002)

(81) Designated States (national): AE, AU, BR, CN, CO, HU, ID, IL, IN, JP, MX, SG, ZA.

(25) **Filing Language:** English

(26) Publication Language: English

(84) Designated States (regional): European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR).

(30) Priority Data:

60/262,393	19 January 2001 (19.01.2001)	US
Not furnished	16 January 2002 (16.01.2002)	US

Published:
— *with international search report*

(71) **Applicant:** MUNTERS CORPORATION [US/US]; 108 Sixth Street S.E., Fort Myers, FL 33907 (US).

(88) Date of publication of the international search report:
3 October 2002


(72) Inventors: CHOWANIEC, James, M.; 1320 Gleason Parkway, Cape Coral, FL 33914 (US). DRUMMOND, Larry, E.; 1607 N.E. 42 Place, Cape Coral, FL 33993 (US).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: HIGH PRESSURE WATER PUMP



ACTION

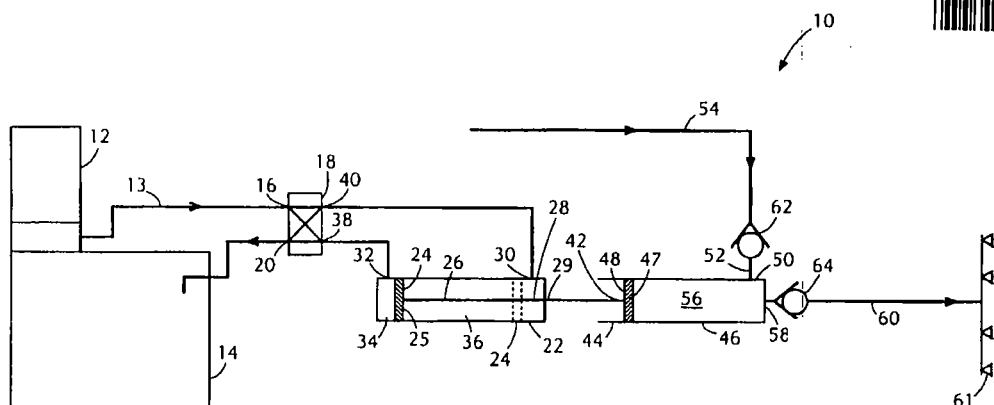

(57) Abstract: A high-pressure water pump for supplying high pressure water for atomization in the inlet stream of a gas turbine is disclosed which includes at least one hydraulic cylinder containing a piston secured to a piston rod extending from the hydraulic cylinder and defining within the hydraulic cylinder first and second hydraulic chambers on opposite sides thereof, hydraulic oil pump and solenoid valve for selectively supplying oil under high pressure alternately to said hydraulic chambers while releasing oil from the opposite chamber thereby to reciprocate said piston rod, and at least one water cylinder including a housing and a piston therein secured to the piston rod for movement therewith and defining at least one fluid chamber in the cylinder on the side of thereof opposite the piston rod ; and check valves in fluid communication with said fluid chamber for allowing water to enter the chamber from a water source when the piston in the water cylinder is moved by the hydraulic cylinder in a direction which enlarges the volume of the fluid chamber and forces water from the fluid chamber at high pressure, while shutting off the supply of water to the chamber, when the piston in the water cylinder is moved by the hydraulic cylinder in a direction that decreases the volume of said fluid chamber.

WO 02/057632 A3