

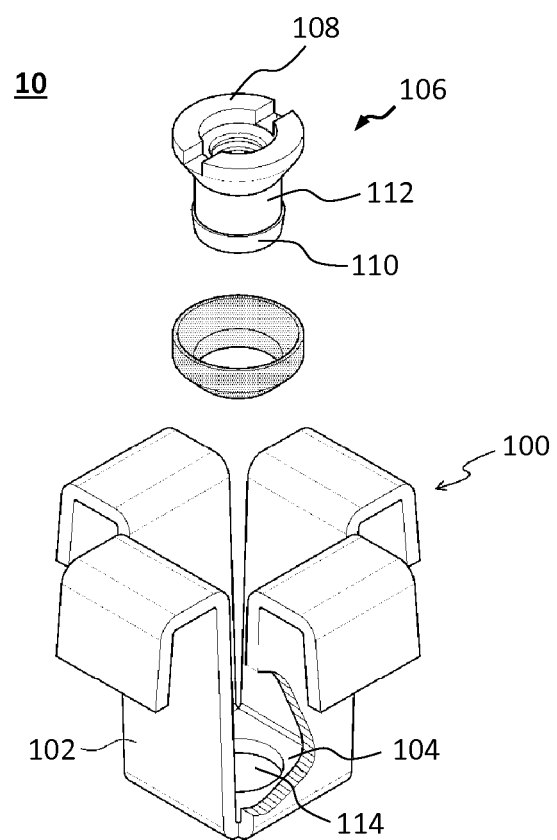


FIG. 1

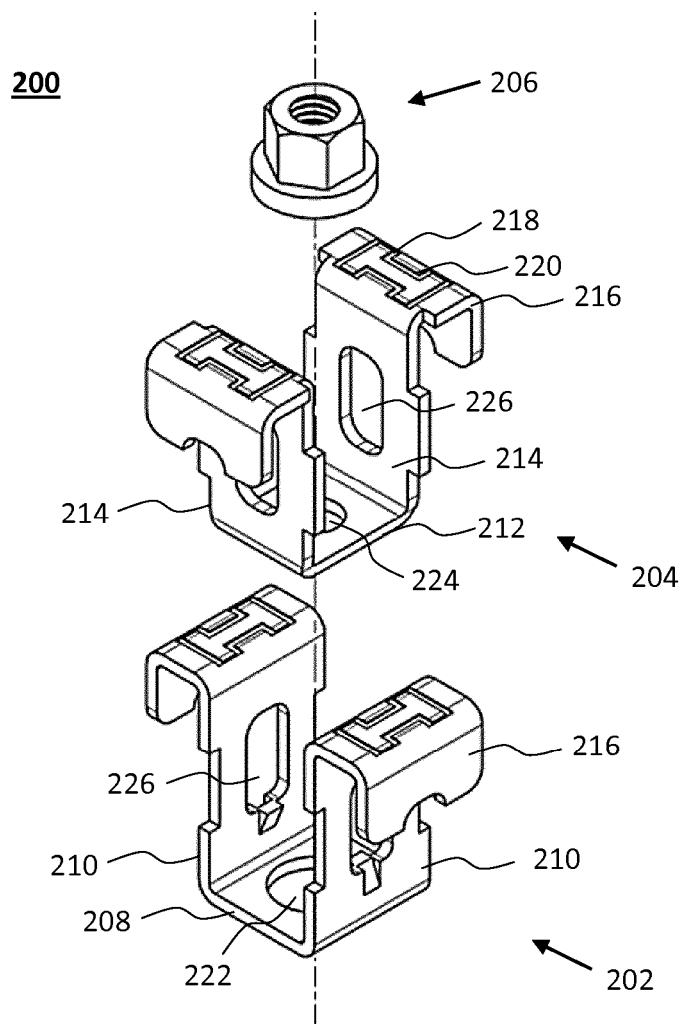


FIG. 2

200

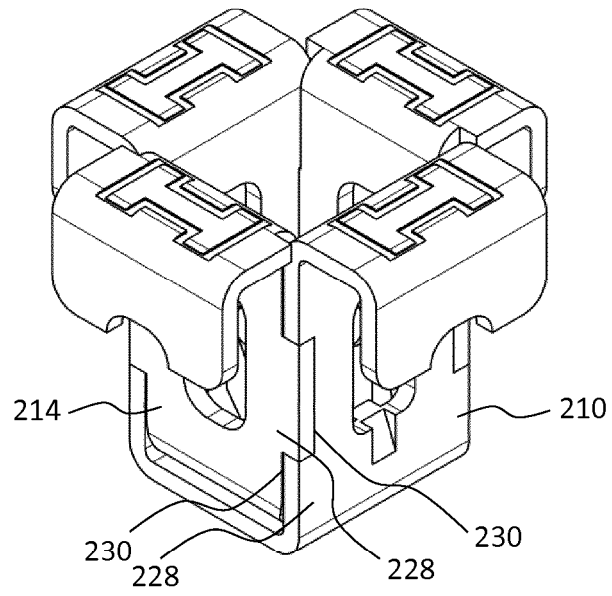


FIG. 3A

200

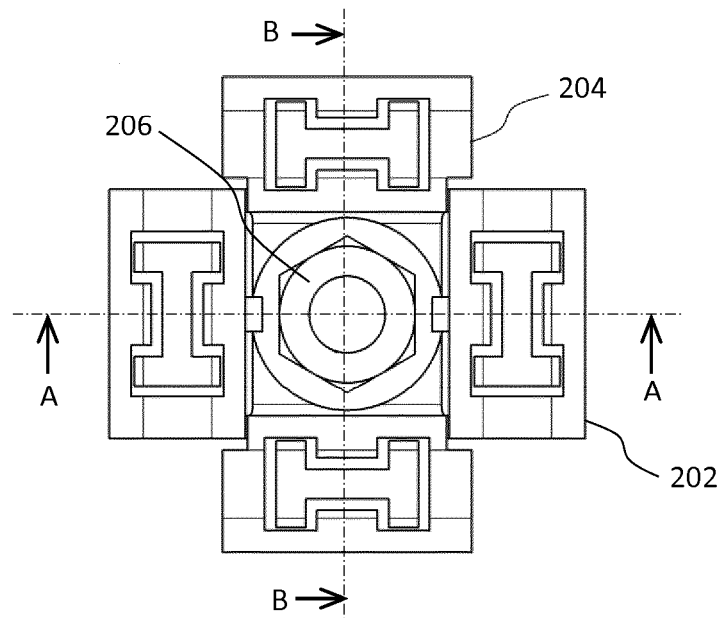


FIG. 3B

A cross-sectional view of a device. A central component (206) with a rounded top is positioned within a housing. A spring (232) is located below the central component, resting on a base (222). The spring is surrounded by a sleeve (234). The entire assembly is housed within a structure (204) that has a central opening. The housing (204) is supported by a base (208). Other components labeled include 214, 238, 240, 212, and 224.

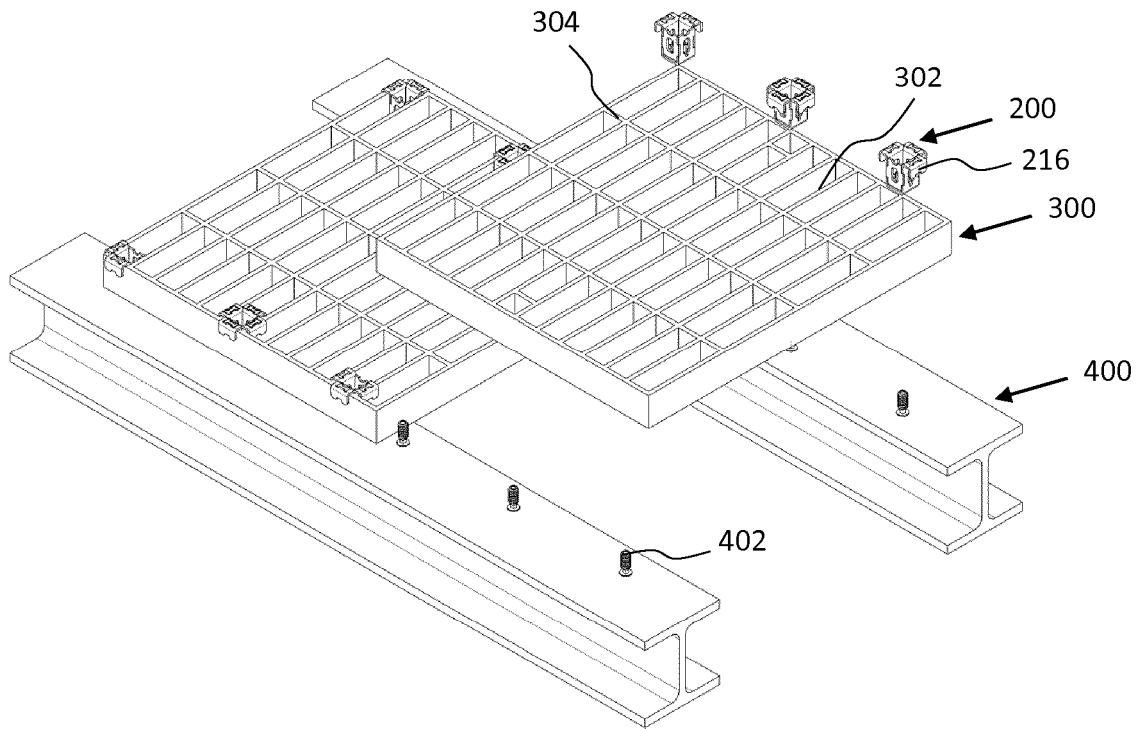


FIG. 5

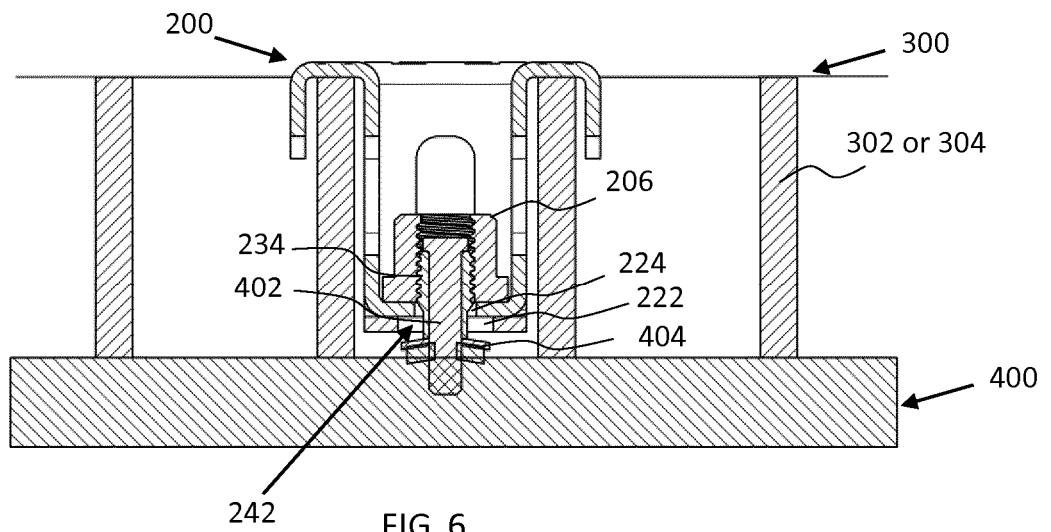
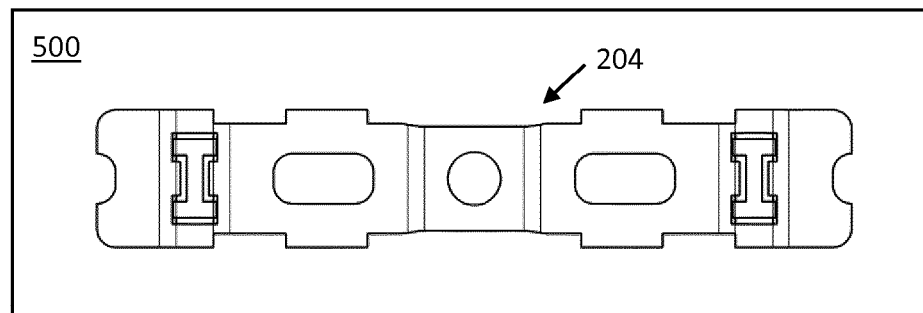
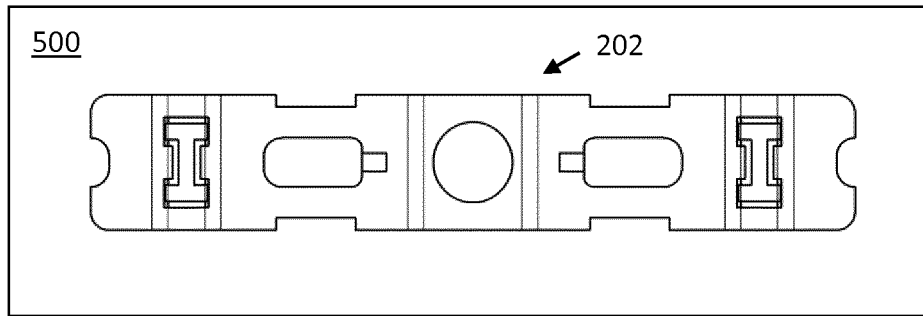


FIG. 6



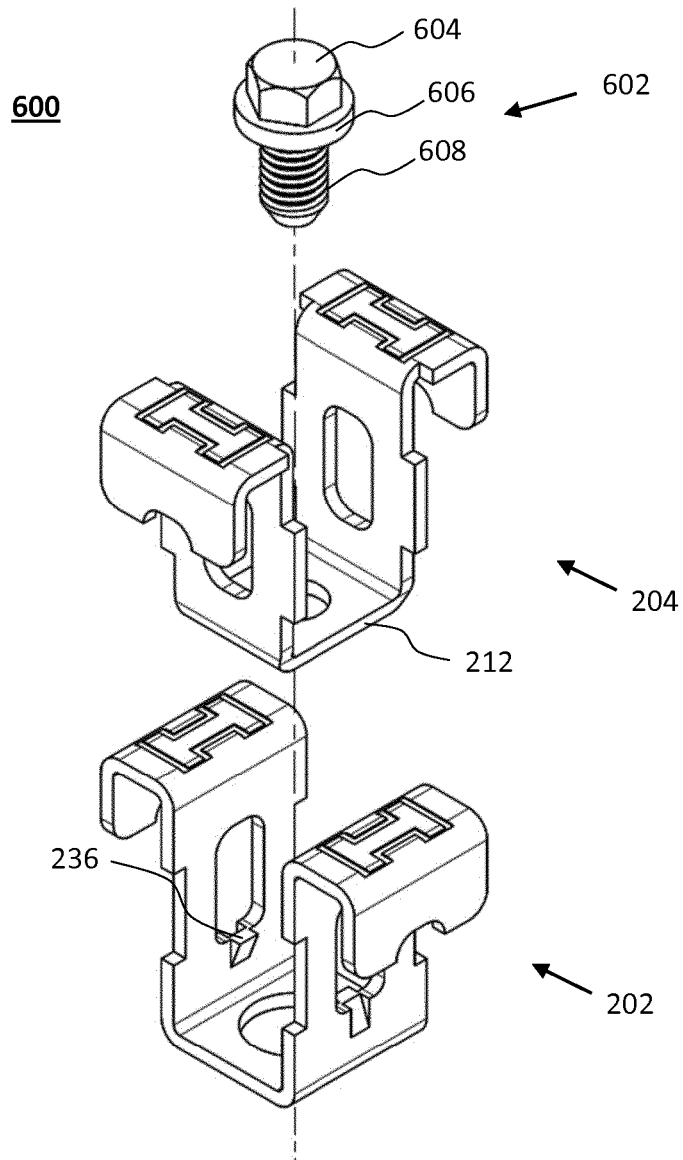


FIG. 8