

18 mar 03
2003013661



162162

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau




(43) International Publication Date
28 March 2002 (28.03.2002)

PCT

(10) International Publication Number
WO 02/25198 A1

- (51) International Patent Classification⁷: **F28D 9/00**, B01D 1/22
- (21) International Application Number: PCT/NO01/00386
- (22) International Filing Date:
21 September 2001 (21.09.2001)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
20004751 22 September 2000 (22.09.2000) NO
- (71) Applicant (for all designated States except US): **NORDIC EXCHANGER TECHNOLOGY AS** [NO/NO]; Vikaveien 85, N-4816 Kolbjørnsvik (NO).
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): **KAROLIUSSEN, Hilberg** [NO/NO]; Svaleveien 16, N-4950 Risør (NO).
- (74) Agent: **TANDBERGS PATENTKONTOR AS**; Boks 7085, N-0306 Oslo (NO).
- (81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.
- (84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Published:
— with international search report
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: HEAT EXCHANGER, METHOD OF EVAPORATING LIQUID AND DISTILLATION DEVICE

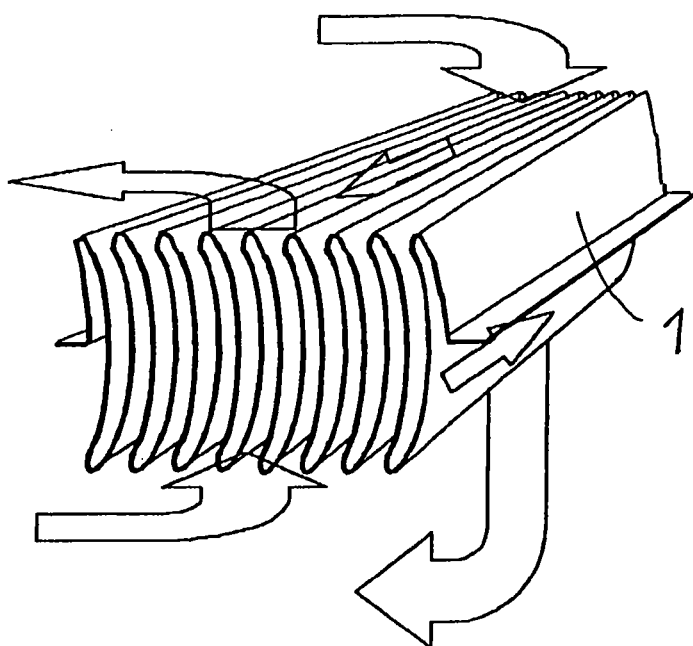

(57) Abstract: Element for heat exchanging between fluids, where the flowing canals for the fluids consist of slits on either side of a thin, folded sheet material (1), and that the ratio between the slit width (24) of the canals and depths (25) in the slits is less than 0.15 times the thickness of the sheet material.

WO 02/25198 A1



ACTION