

ORGANIC SEMICONDUCTOR ELEMENT

BACKGROUND OF THE INVENTION

1. Field of the Invention

5 The present invention relates to an electronic device employing an organic semiconductor. More particularly, it relates to a photoelectronic device such as a photoelectric conversion element and an EL element.

2. Description of the Related Art

10 Compared to inorganic compounds, organic compounds include more varied material systems, and through appropriate molecular design it is possible to synthesize organic materials having various functionalities. Further, the organic compound is characterized in that films and the like formed using the organic compound demonstrate great pliancy, and superior processability can also be
15 achieved by polymerization. In light of these advantages, in recent years, attention has been given to photonics and electronics employing functional organic materials.

 Photonic techniques which make use of photophysical qualities of organic compounds have already played an important role in contemporary industrial techniques. For example, photosensitive materials, such as a photoresist, have
20 become indispensable in a photolithography technology used for fine processing of semiconductors. In addition, since the organic compounds themselves have properties of light absorption and concomitant light emission (fluorescence or phosphorescence), they have considerable applicability as light emitting materials such as laser pigments and the like.

25 On the other hand, since organic compounds do not have carriers themselves, they essentially have superior insulation properties. Therefore, in the field of electronics where the electrical properties of organic materials are utilized, the main conventional use of organic compounds is insulators, where organic compounds are used as insulating materials, protective materials and covering
30 materials.

However, there are means for making massive amounts of electrical current flow in the organic materials which is essentially insulators, and they are starting to be put to practical use in the electronics field. The "means" discussed here can be broadly divided into two categories.

5 The first of these, represented by conductive polymers, is means in which a π -conjugate system organic compound is doped with an acceptor (electron acceptor) or a donor (electron donor) to give the δ -conjugate system organic compound a carrier (Reference 1: Hideki Shirakawa, Edwin J. Louis, Alan G. MacDiarmid, Chwan K. Chiang, and Alan J. Heeger, "Synthesis of Electrically Conducting
10 Organic Polymers: Halogen Derivatives of Polyacetylene, $(CH)_x$ ", Chem. Comm., 1977, 16, 578-580). By increasing the doping amount, the carrier will increase up to a certain area. Therefore, its dark conductivity will also increase together with this, so that significant electricity will be made to flow.

Since the amount of the electrical flow can reach the level of a normal
15 semiconductor or more, a group of materials which exhibit this behavior can be referred to as organic semiconductors (or, in some cases, organic conductors).

This means of doping the acceptor/donor to improve the dark conductivity to make the electrical current flow in the organic material is already being applied in part of the electronics field. Examples thereof include a rechargeable storage
20 battery using polyaniline or polyacene and an electric field condenser using polypyrrole.

The other means for making massive electrical current flow in the organic material uses an SCLC (Space Charge Limited Current). The SCLC is an electrical current which is made to flow by injecting a space charge from the outside
25 and moving it, the current density of which is expressed by Child's Law, i.e., Formula 1, shown below. In the formula, J denotes a current density, ϵ denotes a relative dielectric constant, ϵ_0 denotes a vacuum dielectric constant, μ denotes a carrier mobility, V denotes a voltage, and d denotes a distance (hereinafter, referred to as "thickness") between electrodes applied with the voltage V :

Formula 1

$$J = 9/8 \cdot \epsilon \epsilon_0 \mu \cdot V^2/d^3$$

Note that the SCLC is expressed by Formula 1 in which no carrier trap
5 when the SCLC flows is assumed at all. The electric current limited by the carrier
trap is referred to as a TCLC (Trap Charge Limited Current), and it is proportionate
to a power of the voltage, but both the SCLC and the TCLC are currents that are
subject to bulk limitations. Therefore, both the SCLC and the TCLC are dealt with
in the same way hereinbelow.

10 Here, for comparison, Formula 2 is shown as a formula expressing the
current density when an Ohm current flows according to Ohm's Law. σ denotes a
conductivity, and E denotes an electric field strength:

Formula 2

15 $J = \sigma E = \sigma \cdot V/d$

In Formula 2, since the conductivity σ is expressed as $\sigma = ne\mu$ (where n
denotes a carrier density, and e denotes an electric charge), the carrier density is
included in the factors governing the amount of the electrical current that flows.
20 Therefore, in an organic material having a certain degree of carrier mobility, as long
as the material's carrier density is not increased by doping as described above, the
Ohm current will not flow in a material which normally does not have few carriers.

However, as is seen in Formula 1, the factors which determine the SCLC
are the dielectric constant, the carrier mobility, the voltage, and the thickness. The
25 carrier density is irrelevant. In other words, even in the case of an organic material
insulator with no carrier, by making the thickness d sufficiently small, and by
selecting a material with a significant carrier mobility μ , it becomes possible to
inject a carrier from the outside to make the current flow.

Even when this means is used, the current flow amount can reach the level
30 of a normal semiconductor or more. Thus, an organic material with a great carrier

mobility μ , in other words, an organic material capable of latently transporting a carrier, can be called an "organic semiconductor".

Incidentally, even among organic semiconductor elements which use the SCLC as described above, organic electroluminescent elements (hereinafter, referred to as "organic EL elements") which use both the photonic and electrical qualities of functional organic material as photoelectronic devices, have particularly demonstrated remarkable advancement in recent years.

The most basic structure of the organic EL element was reported by W. Tang, et al. in 1987 (Reference 2: C. W. Tang and S. A. Vanslyke, "Organic electroluminescent diodes", Applied Physics Letters, Vol. 51, No. 12, 913-915 (1987)). The element reported in Reference 2 is a type of diode element in which electrodes sandwich an organic thin film having a total thickness of approximately 100 nm and being constituted by laminating a hole-transporting organic compound and an electron-transporting organic compound, and the element uses a light emitting material (fluorescent material) as the electron-transporting compound. By applying voltage to the element, light-emission can be achieved as from a light emitting diode.

The light-emission mechanism is considered to work as follows. That is, by applying the voltage to the organic thin film sandwiched by the electrodes, the hole and the electron injected from the electrodes are recombined inside the organic thin film to form an excited molecule (hereinafter, referred to as a "molecular exciton"), and light is emitted when this molecular exciton returns to its base state.

Note that, types of molecular excitons formed by the organic compound can include a singlet excited state and a triplet excited state, and the base state is normally the singlet state. Therefore, emitted light from the singlet excited state is referred to as fluorescent light, and the emitted light from the triplet excited state is referred to as phosphorescent light. The discussion in this specification covers cases of contribution to the emitted light from both of the excited states.

In the case of the organic EL element described above, the organic thin film is normally formed as a thin film having a thickness of about 100 to 200 nm.

Further, since the organic EL element is a self-luminous element in which light is emitted from the organic thin film itself, there is no need for such a back light as used in a conventional liquid crystal display. Therefore, the organic EL element has a great advantage in that it can be manufactured to be extremely thin and
5 lightweight.

Further, in the thin film having a thickness of about 100 to 200 nm, for example, the time from when the carrier is injected to when the recombination occurs is approximately several tens of nanoseconds, given the carrier mobility exhibited by the organic thin film. Even when the time required by for the process
10 form the recombination of the carrier to the emission of the light, it is less than an order of microseconds before the light emission. Therefore, one characteristic of the organic thin film is that response time thereof is extremely fast.

Because of the above-mentioned properties of thinness and lightweightness, the quick response time, and the like, the organic EL element is receiving attention
15 as a next generation flat panel display element. Further, since it is self-luminous and its visible range is broad, its visibility is relatively good and it is considered effective as an element used in display screens of portable devices.

Further, in addition to the organic EL element, an organic solar battery is another representative example of an organic semiconductor element using organic
20 material (i.e., an organic semiconductor) capable of transporting carriers latently, which is to say having a certain degree of carrier mobility.

In short, the organic solar battery utilizes an opposite structure to the organic EL element. That is, its structure is similar to the most basic structure of the organic EL element, where the organic thin film having the two-layer structure
25 is sandwiched by electrodes (Reference 3: C. W. Tang, "Two-layer organic photovoltaic cell", Applied Physics Letters, vol. 48, No. 2, 183-185 (1986)). A photoelectric current generated by causing light to be absorbed into the organic thin film is used to obtain an electromotive force. The electric current that flows at this time can be understood as follows: the carrier generated by the light flows due to
30 the carrier mobility present in the organic material.

In this way, the organic material, which was considered as having no purpose in the electronics field other than its original purpose as an insulator, can be made to perform central functionalities in various electronic devices and photoelectronic devices by skillfully devising the organic semiconductor.

5 Accordingly, research in organic semiconductors has become robust at present.

Description has been made above regarding two methods using the organic semiconductor as means for flowing the electric current to the organic material which is essentially an insulator. However, each of these two methods has a different problem.

10 First, in the case where the acceptor and the donor are doped to the organic semiconductor to increase the carrier densities, the conductivity is actually improved but the organic semiconductor itself loses its own physical properties (light absorption, phosphorescence, etc.) which it originally had. For example, when a phosphorescent-light emitting π -conjugate system polymer material is
15 doped with the acceptor/donor, its conductivity increases but it stops emitting light. Therefore, in exchange for obtaining the functionality of conductivity, the other various functionalities which the organic material possesses are sacrificed.

Further, although there is an advantage in that various conductivities can be achieved by adjusting a doping amount of the acceptor or the donor, no matter how
20 much acceptor and donor are doped to increase the carrier, it is difficult to constantly obtain a carrier density equivalent to a metal or of an inorganic compound that is equivalent to a metal (e.g., nitride titan or other such inorganic compound conductor). In other words, with respect to conductivity, it is extremely difficult to surpass an inorganic material, except for in several examples. Thus, the
25 only remaining advantage is that the organic material is extremely workable and pliant.

On the other hand, in the case where the SCLC (hereinafter, SCLC includes a photoelectric current) is made to flow to the organic semiconductor, the physical properties that the organic semiconductor originally had are not lost. A
30 representative example of such is none other than the organic EL element, in which

the light emission from the fluorescent material (or phosphorescent material) is utilized even when the electric current is made to flow. The organic solar battery also utilizes the functionality of light absorption by the organic semiconductor.

However, as can be understood by looking at Formula 1, since the SCLC is
5 inversely proportionate to the 3rd power of the thickness d , the SCLC can only be made to flow through a structure consisting of electrodes sandwiched to both surfaces of extremely thin films. More specifically, in light of the general carrier mobility of organic materials, the structure must be an ultra thin film of approximately 100 nm to 200 nm.

10 It is true, however, that by adopting the above-mentioned ultra thin film structure, a significant amount of SCLC can be made to flow at low voltage. One reason why the organic EL element such as the one discussed in Reference 2 is successful is because the thickness of its organic thin film is designed as a uniformly ultra thin film having a thickness of approximately 100 nm.

15 However, the fact that the thickness d must be made extremely thin actually becomes the biggest problem when the SCLC is made to flow. First, in the 100 nm thin film, it is easy for pinholes and other such defects to develop, and short circuits and other such problems occur due to these, causing a concern that yield may deteriorate. Further, not only does the mechanical strength of the thin film
20 decline, but also the manufacturing process itself is restricted because the film must be an ultra thin film.

Further, when the SCLC is used as the electric current, the physical properties that the organic semiconductor itself originally possessed are not lost, and there is an advantage in that various functionalities can be produced. However,
25 deterioration of the functionality of the organic semiconductor is accelerated by making the SCLC flow. For example, looking at the organic EL element as an example, it is known that the lifetime of the element (i.e., the half-life of the brightness level of the emitted light) deteriorates almost in inverse proportion to its original brightness, or, in other words, to the amount of electrical current that is
30 made to flow (Reference 4: Yoshiharu SATO, "The Japan Society of Applied

Physics / Organic Molecular Electronics and Bioelectronics", vol. 11, No. 1 (2000), 86-99).

As described above, in the device where the acceptor or the donor is doped to produce conductivity, functionalities other than the conductivity are lost.
5 Further, in the device where the SCLC is used to produce the conductivity, the flowing of massive amounts of an electrical current through the ultra thin film becomes a cause of problems regarding the element's reliability and the like.

Incidentally, in photoelectronic devices using the organic semiconductors, such as organic EL elements and organic solar batteries, there is also a problem with
10 respect to efficiency.

The organic EL element will be discussed as an example. The light emitting mechanism of the organic EL element is that the injected hole and electron recombine with each other to be converted into light. Therefore, theoretically, it is possible to extract at most one photon from the recombination of one hole and one
15 electron, and it is not possible to extract a plurality of photons. That is, the internal quantum efficiency (the number of emitted photons with respect injected carriers) should be at most 1.

However, in reality, it is difficult to bring the internal quantum efficiency close to 1. For example, in the case of the organic EL element using the
20 fluorescent material as the light emitting body, the statistical ratio of generation for the singlet excited state (S^*) and the triplet excited state (T^*) is considered to be $S^* : T^* = 1 : 3$ (Reference 5: Tetsuo TSUTSUI, "Textbook of the 3rd seminar at Division of Organic Molecular Electronics and Bioelectronics, The Japan Society of Applied Physics", p. 31 (1993)). Therefore, the theoretical limit of the internal
25 quantum efficiency is 0.25. Furthermore, as long as the fluorescent quantum yield from the fluorescent material is not ϕ_f , the internal quantum efficiency will drop even lower than 0.25.

In recent years, attempts have been made to use phosphorescent materials to use the light emission from the triplet excited state to bring the internal quantum
30 efficiency's theoretical limit close to 0.75 to 1, and the efficiency actually

surpassing that of fluorescent material has been achieved. However, in order to achieve this, it is necessary to use a phosphorescent material with a high phosphorescent quantum efficiency φ_p . Therefore, the range of selection for the material is unavoidably restricted. This is because organic compounds that can
5 emit phosphorescent light at room temperature are extremely rare.

In other words, if means could be structured for improving the electrical current efficiency (the brightness level generated in relation to the electrical current) of the organic EL element, this would be a great innovation. If the electrical current efficiency is improved, a greater level of brightness can be produced with a
10 smaller electrical current. Conversely, since the electrical current can be reduced for achieving a certain brightness level, the deterioration caused by the massive amount of electrical current made to flow to the ultra thin film as described above can be reduced.

The inverse structure of the organic EL element, which is to say the
15 photoelectric conversion such as in the organic solar battery, is inefficient at present. As described above, in the organic solar battery using the conventional organic semiconductor, the electrical current does not flow if the ultra thin film is not used. Therefore, electromotive force is not produced, either. However, when the ultra thin film is adopted, a problem arises in that the light absorption efficiency is poor
20 (i.e., the light cannot be completely absorbed). This problem is considered to be the largest reason for the poor efficiency.

In light of the foregoing discussion, the electronic device using the organic semiconductor has a shortcoming in that when the massive electrical current is made to flow in a device utilizing the physical properties that are unique to the
25 organic material, the reliability and yield from the device is influenced unfavorably. Furthermore, particularly in the photoelectronic device, the efficiency of the device is poor. These problems basically can be said to arise from the "ultra thin film" structure of the conventional organic semiconductor element.

Therefore, an object of the present invention is to introduce a new concept to the structure of the conventional organic semiconductor element, to provide an organic semiconductor element with not only greater reliability but also higher yield, without using the conventional ultra thin film. Another object of the present invention is to improve the efficiency of the photoelectronic device using the organic semiconductor.

The inventor of the present invention, as a result of repeated intense studies, has devised means capable of achieving the above-mentioned object by combining an organic semiconductor that is doped with an acceptor or a donor to make it conductive, and an organic semiconductor in which an SCLC is used to achieve the conductivity. The most basic structure thereof is shown in FIG. 1.

FIG. 1 shows an organic semiconductor element comprised of an organic structure in which, between an anode and a cathode, there are alternatively laminated an organic thin film layer (referred to as a "functional organic thin film layer" in the present specification) for realizing various functionalities by flowing an SCLC, and a conductive thin film layer in a floating state in which a dark conductivity is achieved by doping the acceptor or donor, or by another method.

What is important here, is that the conductive thin film layer should be connected substantially ohmically to the functional organic thin film layer (in this case, the conductive thin film layer is particularly referred to as an "ohmic conductive thin film layer"). In other words, obstructions between the conductive thin film layer and the functional organic thin film layer should be eliminated or extremely minimized.

By adopting the above structure, holes and electrons are easily injected each from the ohmic conductive thin film layers into each of the functional organic thin film layers. For example, a conceptual diagram of an element shown in FIG. 1 as $n = 2$ is shown in FIGs. 2A and 2B. In FIGs. 2A and 2B, when an electrical voltage is applied between the anode and the cathode, electrons are easily injected from a first ohmic conductive thin film layer into a first functional organic thin film layer, and the holes are easily injected from the first ohmic conductive thin film

layer into a second functional organic thin film layer. When viewed from an external circuit, a hole moves from the anode toward the cathode, and an electron moves from the cathode toward the anode (FIG. 2A). However, it can also be understood that both the electron and the hole flow from the ohmic conductive thin film layer back toward the opposite directions (FIG. 2B).

Here, by making each functional organic thin film layer to have a thickness of 100 nm to 200 nm or smaller, the carrier injected into each functional organic thin film layer can be made to flow as the SCLC. That is, in each functional organic thin film layer, a functionality (such as light emission or the like) derived from the inherent physicality of the organic material can be realized.

Moreover, when the basic structure of the present invention is applied, the organic structure can be made to have any degree of thickness, which is extremely useful. In other words, assume that in the conventional element (in which a functional organic thin film layer 303 is sandwiched between a cathode 301 and an anode 302), a given electrical voltage V is applied to the film thickness d to thereby obtain an electrical current density of J (FIG. 3A). Here, in the case of the present invention (FIG. 3B) with the alternatively laminated n number of functional organic thin film layers 303 similarly having film thickness d and $(n - 1)$ number of ohmic conductive thin film layers 304, where it was only possible to flow the SCLC into the thickness d (which was 100 nm to 200 nm in the conventional art), the present invention appears equivalent to flowing an SCLC having the current density J to a film thickness nd , just as in the case shown in FIG. 3A. In other words, the effect is that of FIG. 3C, but this is impossible in the conventional art because no matter how much voltage is applied, the SCLC suddenly stops flowing if the film thickness becomes very thick.

Of course, this simply means only that an electrical voltage nV is required. However, the electronic devices using the organic semiconductor can easily overcome the problem in that by utilizing the organic material's inherent physical properties, when a massive amount of electrical current is made to flow, there is a negative effect on the reliability and the yield of the device.

Thus, by providing the organic structure with the alternately laminated functional organic thin film layer and conductive thin film layer, the organic semiconductor element can make the SCLC flow in greater film thickness than in the conventional art. This concept did not exist until now. This concept can
5 obviously be applied in organic EL elements where the SCLC is made to flow to achieve light emission and in organic solar batteries which utilize a photoelectric current and are said to have the opposite mechanism of the organic EL elements. The concept can also be applied broadly to other organic semiconductor elements.

Therefore, according to the present invention, there is provided an organic
10 semiconductor element comprised of an organic structure formed by sequentially laminating an n number of functional organic thin film layers (where n is an integer equal to or greater than 2) consisting of a first through an n -th functional organic thin film layers between an anode and a cathode, characterized in that: a conductive thin film layer in a floating state is without exception formed between a k -th
15 functional organic thin film layer (where k is an integer of $1 \leq k \leq (n - 1)$) and a $(k + 1)$ th functional organic thin film layer; and each of the conductive thin film layers ohmically contacts with each of the functional organic thin film layer.

In this case, as the conductive thin film layer, it is preferable to use an organic compound instead of using a metal or a conductive inorganic compound.
20 Particularly in the case of the photoelectronic device which requires transparency, it is preferable to use the organic compound.

Therefore, according to the present invention, there is provided an organic semiconductor element comprised of an organic structure formed by sequentially laminating an n number of functional organic thin film layers (where n is an integer
25 equal to or greater than 2) consisting of a first through an n -th functional organic thin film layers between an anode and a cathode, characterized in that: a conductive thin film layer in a floating state which includes an organic compound is without exception formed between a k -th functional organic thin film layer (where k is an integer of $1 \leq k \leq (n - 1)$) and a $(k + 1)$ th functional organic thin film layer; and each
30 of the conductive thin film layers ohmically contacts with each of the functional

organic thin film layer.

Also, in order to contact the conductive thin film layer with the functional organic thin film layer ohmically or in a substantially equivalent manner, as described above, it is important to adopt the means in which the conductive thin film layer is formed of the organic compound and the layer is doped with the acceptor or the donor.

Therefore, according to the present invention, there is provided an organic semiconductor element comprised of an organic structure formed by sequentially laminating an n number of functional organic thin film layers (where n is an integer equal to or greater than 2) consisting of a first through an n -th functional organic thin film layers between an anode and a cathode, characterized in that: a conductive thin film layer in a floating state which includes an organic compound is without exception formed between a k -th functional organic thin film layer (where k is an integer of $1 \leq k \leq (n - 1)$) and a $(k + 1)$ th functional organic thin film layer; and each of the conductive thin film layers contains at least one of an acceptor and a donor for the organic compound.

Also, according to the present invention, there is provided an organic semiconductor element comprised of an organic structure formed by sequentially laminating an n number of functional organic thin film layers (where n is an integer equal to or greater than 2) consisting of a first through an n -th functional organic thin film layers between an anode and a cathode, characterized in that: a conductive thin film layer in a floating state which includes an organic compound is without exception formed between a k -th functional organic thin film layer (where k is an integer of $1 \leq k \leq (n - 1)$) and a $(k + 1)$ th functional organic thin film layer; and each of the conductive thin film layers contains both of an acceptor and a donor for the organic compound.

Note that, when the conductive thin film layer is doped with the acceptor or the donor, the organic compound used in the functional organic thin film layer and the organic compound used in the conductive thin film layer are connected with the same thing (i.e., the organic compound used in the functional organic thin film layer

is included into the conductive thin film layer, and the conductive thin film layer is doped with the acceptor or the donor). This enables the element to be manufactured according to a simple process.

Incidentally, in the case where both the acceptor and the donor are included
5 in the conductive thin film layer, it is preferable that: the conductive thin film layer be structured by laminating a first layer formed by adding an acceptor to the organic compound, and a second layer formed by adding a donor to an organic compound that is the same as the organic compound; and the first layer be positioned closer to a cathode side than the second layer.

10 Also, in such a case, it is preferable that the organic compound used in the functional organic thin film layer and the organic compound used in the conductive thin film layer be connected with the same thing.

Incidentally, in the case where both the acceptor and the donor are included in the conductive thin film layer, it is also preferable that: the conductive thin film
15 layer be structured by laminating a first layer formed by adding an acceptor to a first organic compound, and a second layer formed by adding a donor to a second organic compound that is different from the first organic compound; and the first layer be positioned closer to a cathode side than the second layer.

Also, in such a case, it is preferable that the organic compound used in the
20 functional organic thin film layer and the organic compound used in the first layer be connected with the same thing. Also, it is preferable that the organic compound used in the functional organic thin film layer and the organic compound used in the second layer be connected with the same thing.

The structure of the functional organic thin film layer may be manufactured
25 using a bipolar organic compound, or by combining monopolar organic compounds by laminating a hole transporting layer and an electron transporting layer, for example.

The element structure described above is extremely useful among organic semiconductor elements particularly because in the photoelectronics field it can
30 increase light emission efficiency and light absorption efficiency. That is, by

structuring the functional organic thin film layer with the organic compound that exhibits light emission by flowing the electrical current, the organic EL element with high reliability and good efficiency can be created. Further, by structuring the functional organic thin film layer with the organic compound which generates
5 the photoelectric current (i.e., generates the electromotive force) by absorbing light, the organic solar battery with high reliability and good efficiency can be created.

Therefore, the present invention includes everything related to the organic semiconductor element in which the functional organic thin film layer described above has the structure capable of realizing the organic EL element functionality
10 and the organic solar battery functionality.

Note that, particularly in the organic EL element, in the case where the functional organic thin film layer is structured with the bipolar organic compound, the bipolar organic compound preferably includes a high molecular compound having a π -conjugate system. Further, for the conductive thin film layer as well, it
15 is desirable to use a method in which the high molecular compound having an π -conjugate system is used and the layer is doped with the acceptor or the donor to improve the dark conductivity. Alternatively, for the conductive thin film layer, it is also possible to use a conductive high molecular compound with the acceptor or donor added thereto.

Further, in the organic EL element, in the case where, for example, the hole transporting layer made of a hole transporting material, and the electron transporting layer made of an electron transporting material, are laminated to structure the functional organic thin film layer by combining monopolar organic compounds, the conductive thin film layer should also be made using at least one of
25 the hole transporting material and the electron transporting material, and the layers should be doped with the acceptor and donor to increase the dark conductivity. Alternatively, it is also possible to use both the hole transporting material and the electron transporting material. In more specific terms, this refers to a method in which a donor-doped layer of the electron transporting material used in the
30 functional organic thin film layer, and an acceptor-doped layer of the hole

transporting material used in the functional organic thin film layer, are laminated upon each other in a structure used as the conductive thin film layer.

The structure of the functional organic thin film layer when used in the organic solar battery is the same as when used in the organic EL element. That is, in the organic solar battery, in the case where the functional organic thin film layer is structured with the bipolar organic compound, the bipolar organic compound preferably includes a high molecular compound having the π -conjugate system. Further, for the conductive thin film layer as well, it is desirable to use a method in which the high molecular compound having the π -conjugate system is used and the layer is doped with the acceptor or the donor to improve the dark conductivity. Alternatively, for the conductive thin film layer, it is also possible to use the conductive high molecular compound with the acceptor or donor added thereto.

Further, in the organic solar battery, in the case where, for example, the layer made of the hole transporting material, and the layer made of the electron transporting material, are laminated to structure the functional organic thin film layer by combining monopolar organic compounds, the conductive thin film layer should also be made using at least one of the hole transporting material and the electron transporting material, and the layers should be doped with the acceptor and donor to increase the dark conductivity. Alternatively, it is also possible to use both the hole transporting material and the electron transporting material. In more specific terms, this refers to a method in which the donor-doped layer of the electron transporting material used in the functional organic thin film layer, and the acceptor-doped layer of the hole transporting material used in the functional organic thin film layer are laminated upon each other in the structure used as the conductive thin film layer.

Note that, if the carrier can be injected into all the conductive thin film layers (ohmic conductive thin film layers) described above, then it is not necessary to reduce sheet resistance in any of them. Accordingly, a conductivity rate of 10^{-10} S/m or greater is sufficient.

BRIEF DESCRIPTION OF THE DRAWINGS

In the accompanying drawings:

FIG. 1 shows a basic structure of the present invention;

FIGs. 2A and 2B show concepts of the present invention;

5 FIGs. 3A to 3C show effects produced by the present invention;

FIGs. 4A and 4B illustrate theory behind improvement in electrical current efficiency;

FIG. 5 shows theory behind improvement in the electrical current efficiency;

10 FIGs. 6A and 6B depict conventional organic EL elements;

FIG. 7 shows an organic EL element according to the present invention;

FIG. 8 shows a specific example of an organic EL element according to the present invention;

15 FIG. 9 shows a specific example of an organic EL element according to the present invention; and

FIG. 10 shows a specific example of an organic EL element according to the present invention.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

20 Hereinafter, detailed explanation is made with respect to embodiments of the present invention, using an organic EL element and an organic solar battery as examples. Note that, with respect to the organic EL element, in order to achieve light emission, it is sufficient if at least one of an anode and a cathode is made transparent. However, in accordance with this embodiment mode, description is
25 made of an element structure in which a transparent anode is formed on a substrate to achieve the light from the anode side. In actuality, the present invention may be applied in a structure in which the cathode is formed onto the substrate to achieve the light from the cathode side, and in a structure in which the light is achieved from an opposite side from the substrate, and in a structure in which the light is
30 achieved from both the electrodes on both sides. In the organic solar battery as

well, in order to make the battery absorb light, any one side of the element may be made transparent.

First, in the organic EL element, as means for overcoming the poor reliability deriving from the ultra thin film and also for improving the proportion of
5 light emitted in relation to the electrical current (i.e., the electrical current efficiency), in order to achieve a simple device structure, the organic EL element may be connected serially, for example. This will be explained below.

As shown in, FIG. 4A, assume an organic EL element D_1 , in which applying a certain electrical voltage V_1 causes an electric current with an electric
10 density J_1 to flow and light is emitted by a light energy per unit surface area L_1 (i.e., photons having certain amounts of energy are emitted, and the light energy is equivalent to the product of that energy multiplied by the number of photons). At this time, a power efficiency ϕ_{e1} (this refers to the light emission energy with respect to the electrical energy (electrical power) that was given, and it means the
15 same thing as an "energy conversion rate") is given in the following formula:

Formula 3

$$\phi_{e1} = L_1 / (J_1 \cdot V_1)$$

Next, a case will be considered in which an organic EL element D_2 that is exactly equivalent to the organic EL element D_1 is connected to the organic EL
20 element D_1 serially (See FIG. 4B). Note that, a contact point C_1 connects the two elements D_1 and D_2 together ohmically.

Here, the elements as a whole (i.e., element D_{all} having the structure consisting of D_1 and D_2 connected to each other) are applied with a voltage V_2 ($= 2V_1$) that is double the voltage that was applied in FIG. 4A. Then, since D_1 and D_2
25 are equivalent to each other, the voltage V_1 is applied to D_1 and to D_2 , respectively, as shown in FIG. 4B, and the shared electrical current density J_1 flows. Therefore, since D_1 and D_2 each emit light with the light energy L_1 , double the light energy $2L_1$ can be obtained from the elements as a whole D_{all} .

The power efficiency ϕ_{e2} at this time is given in the following formula:

30 Formula 4

$$\eta_{e2} = 2L_1/(J_1 \cdot 2V_1) = L_1/(J_1 \cdot V_1)$$

As can be understood by comparing the above-mentioned Formula 3 and the above-mentioned Formula 4, there is no difference between FIG. 4A and FIG. 4B in terms of the power efficiency, and the law of energy conservation in which V_1 and J_1 are converted to L_1 is being obeyed. However, the current efficiency appears to increase twofold, i.e., L_1/J_1 is increased to $2L_1/J_1$. This has a significant meaning for the organic EL element. That is, by increasing the organic EL elements connected serially and by applying more voltage in proportion to the number of elements that were increased and maintaining the current density at a fixed level, it becomes possible to increase the electrical current efficiency.

Examining this concept more generally, when n number of the entirely equivalent organic EL elements are ohmically connected, it is possible to achieve n times the brightness level by maintaining the current density at a fixed level and increasing the electrical voltage by n times. This property derives from the proportional relationship between the brightness level and the electrical current density level in the organic EL element.

Of course, even in the case where different organic EL elements are connected serially, the brightness level emitted from each of the organic EL elements will be different. However, by significantly increasing the voltage, it becomes possible to extract more brightness than in the case of a single organic EL element. A conceptual diagram of this is shown in FIG. 5.

As shown in FIG. 5, when the different organic EL elements D_1 and D_2 are connected serially and one of the organic EL elements (either D_1 or D_2) is applied with a higher voltage $V_1 + V_2$ than the necessary voltage (either V_1 or V_2) to create the electrical current J_1 , a brightness level $L_1 + L_2 (> L_1, L_2)$ can be produced with the current J_1 .

At this time, by configuring, for example, D_1 as a blue light emitting element and D_2 as a yellow light emitting element, if color mixing can be performed, then a white color light emission will occur. Therefore, this enables a white color emitting element in which the electrical current efficiency is higher, and therefore

the longevity of the element is higher than in the conventional art.

As described above, by ohmically connecting the elements serially, the apparent electrical current efficiency is improved and greater brightness can be obtained with a smaller electrical current. This means that it is possible to make
5 the necessary electrical current for emission of the same level of brightness is kept smaller than in the conventional art. Furthermore, as long as a significant electrical voltage can be applied, it is possible to connect however many organic EL elements as may be needed, and the overall film thickness can be made thick.

However, as described above, a problem occurs even in the case where the
10 organic EL elements are simply connected serially. The problem derives from the electrodes for the organic EL elements and from the element structure, which will be explained using FIG. 6. FIG. 6A shows a cross-sectional view of the organic EL element D₁ shown in FIG. 4A, and FIG. 6B shows a cross sectional view of all the elements D_{all} shown in FIG. 4B, in a schematic manner.

15 The basic structure (FIG. 6A) of the normal organic EL element is manufactured by providing a transparent electrode 602 onto a substrate 601 (here, the electrode is an anode, and an ITO or the like is generally used for this), a functional organic thin film layer (hereinafter, referred to as an "organic EL layer") 604 for performing light emission by flowing an electrical current is then formed
20 and a cathode 603 is then provided. With this structure, light can be produced from the transparent electrode (the anode) 602. The cathode 603 may be a cathode which normally employs both a metallic electrode with a low work function, or an electron injecting cathode buffer layer, along with a metallic conductive film (such as aluminum or the like).

25 When two organic EL elements having the structure described above are connected simply serially (as shown in FIG. 6B), the structure will include a first transparent electrode (cathode) 602a, a first organic EL layer 604a, a first cathode 603a, a second organic EL layer 604b, a second organic EL layer 604b, and a second cathode 603b, which are laminated in this order from the lower side. Then,
30 the light emitted by the second organic EL layer 604b cannot be transmitted through

because the first cathode 603a which is metal, and thus the light cannot be taken out of the element. Therefore, it becomes impossible to do such innovations as mixing the light emission from the upper and the lower organic EL elements to produce the white color light.

5 For example, a technique using transparent ITO cathodes for both the anode and the cathode has also been reported (Reference 6: G. Parthasarathy, P. E. Burrows, V. Khalfin, V. G. Kozlov, and S. R. Forrest, "A metal-free cathode for organic semiconductor devices", J. Appl. Phys., 72, 2138-2140 (1998)). By using this, the first cathode 603a can be made transparent. Therefore, it becomes possible to
10 bring out the light emitted from the second organic EL layer 604b. However, since the ITOs are mainly formed by sputtering, there is a concern that the organic EL layer 604a will suffer damage. Further, the process also becomes cumbersome because the application of the organic EL layer by deposition and the application of the ITO by sputtering have to be repeated.

15 In order to overcome this problem, a more desirable embodiment has a structure such as shown in FIG. 7, for example, in which the electrical current efficiency can be improved using a concept similar to connecting the elements serially to improve the electrical current efficiency, and also the element transparency issue can be cleared without a problem.

20 FIG. 7 shows a structure in which a first organic EL layer 704a, a first conductive thin film layer 705a, a second organic EL layer 704b, and a cathode 703 are laminated in this order on a transparent electrode (anode) 702 that is provided to a substrate 701. In this structure, by applying a material in which the acceptor or the donor has been applied to the organic semiconductor, the first semiconductor
25 thin film layer 705a can be connected almost ohmically to the organic EL layer (i.e., the hole carrier and the electron carriers can be injected), and, moreover, the transparency can be maintained almost completely. Therefore, the light emission that is generated with the second organic EL layer 703b can be brought out, and the electrical current efficiency can be doubled simply by doubling the electrical
30 voltage.

Moreover, since the entire process becomes consistent (for example, when using low molecular materials, a dry process such as vacuum deposition can be used, and when using high molecular materials, a wet process such as spin coating can be used), the manufacturing process does not become cumbersome.

5 Note that, FIG. 7 shows the structure in which two of organic EL layers have been provided. However, as described above, as long as a significant amount of electrical voltage may be applied, the structure may be multi-layered (of course, the conductive thin film layer is inserted between each of the organic EL layers). Therefore, the poor reliability of the organic semiconductor element, which is
10 derived from the ultra thin film structure, can be overcome.

The philosophy described above naturally can also be applied in the organic solar battery, which is said to utilize the opposite mechanism from the organic EL element. This will explained as follows.

It is assumed here that there is an organic solar battery S_1 in which a given
15 light energy L_1 generates a photoelectric current with an electrical current density J_1 , thus generating an electromotive force V_1 . N number of the batteries S_1 are ohmically connected serially, and when a light energy nL_1 is irradiated there, n times the electromotive force ($= nV_1$) can be obtained if an equivalent light energy ($= nL_1/n = L_1$) can be provided to all the n number of solar batteries S_1 . In short, if
20 all the organic solar batteries that are connected serially can absorb the light, then the electromotive force increases as a product of the number of batteries.

For example, there is a report that discloses improving the electromotive force by connecting two organic solar batteries serially (Reference 7: Masahiro HIRAMOTO, Minoru SUEZAKI, and Masaaki YOKOYAMA, "Effect of Thin
25 Gold Interstitial-layer on the Photovoltaic Properties of Tandem Organic Solar Cell", Chemistry Letters, pp. 327-330, 1990). According to Reference 7, by inserting a gold thin film between the two organic solar batteries (i.e., between a front cell and a back cell) an effect of improving the electromotive force generated by the light irradiation is obtained.

30 However, Reference 7 also structures the gold thin film to have a thickness

of 3 nm or less in order to achieve the transmittivity. In other words, the film is structured as an ultra thin film that is thin enough for light to pass through it, designed so that the light will reach the back cell. Moreover, reproducibility becomes problematic when the thickness of the ultra thin film is on the order of several nm.

Such problems can also be resolved by using the present invention. That is, in the organic solar battery structure such as disclosed in Reference 7, the present invention may be applied at the gold thin film portion. By doing this, the present invention can be used as a single organic solar battery that is thicker and more highly efficient than the conventional art, instead of connecting two elements serially.

The basic concepts and structures of the present invention have been described above using the organic EL element and the organic solar battery as examples. The following describes preferred examples of structures of the conductive thin film layer to be used for the present invention. However, the present invention is not limited to these examples.

First, various metallic thin films can be used because they are conductive, which is to say they have multiple carriers. Specifically, Au, Al, Pt, Cu, Ni, etc. are examples that can be used. Note that, when these metals are used for the conductive thin film layer, it is preferable that they be formed as ultra thin films thin enough for visible light to pass through (i.e., several nm to several tens of nm).

Further, various metallic oxide thin films can be used, particularly from the viewpoint of visible light transmittivity. Specific examples include ITO, ZnO, SnO₂, copper oxide, cobalt oxide, zirconium oxide, titanium oxide, niobium oxide, nickel oxide, neodymium oxide, vanadium oxide, bismuth oxide, beryllium aluminum oxide, boron oxide, magnesium oxide, molybdenum oxide, lanthanum oxide, lithium oxide, ruthenium oxide, and BeO.


Further, compound semiconductor thin films can be also used, including ZnS, ZnSe, GaN, AlGaIn, and CdS.

A particular characteristic of the present invention is that the conductive thin film layer can be structured of an organic compound. For example, there is a technique for mixing a p-type organic semiconductor and an n-type organic semiconductor to form the semiconductor thin film layer.


Typical examples of a p-type organic semiconductor include, in addition to

CuPc represented by Chem. 1 below, phthalocyanine bound to the other metals or bound to no metals (represented by Chem. 2 below). The following can be also used as the p-type organic semiconductor: TTF (represented by Chem. 3 below); TTT (represented by Chem. 4 below); methylphenothiazine (represented by Chem. 5 below); N-isopropylcarbazole (represented by Chem. 6 below); and the like. Further, a hole transporting material used for organic EL etc., such as TPD (represented by Chem. 7 below), α -NPD (represented by Chem. 8 below), or CBP (represented by Chem. 9 below) may be also applied thereto.


10 Chem. 1

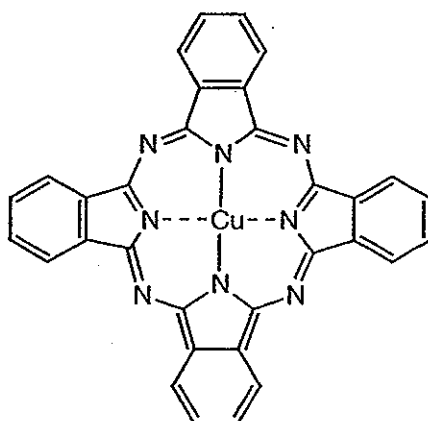


Chem. 2

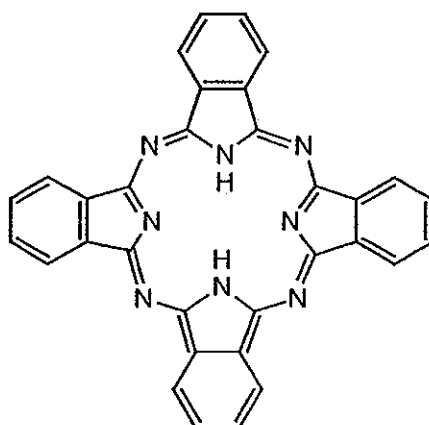


Chem. 3




Chem. 4




Chem. 5




5 Chem. 6



Chem. 7

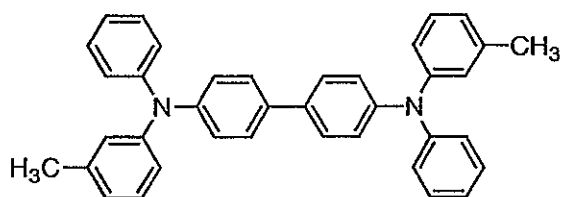


Chem. 8

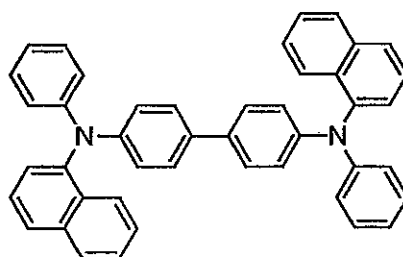

10


Chem. 9

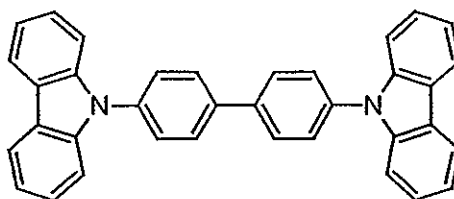


Typical examples of an n-type organic semiconductor include, in addition to F₁₆-CuPc represented by Chem. 10 below, 3,4,9,10-perylene tetracarboxylic acid

derivatives such as PV (represented by Chem. 11 below), Me-PTC (represented by Chem. 12 below), or PTCDA (represented by Chem. 13 below), naphthalenecarboxylic anhydrides (represented by Chem. 14 below), naphthalenecarboxylic diimide (represented by Chem. 15 below), or the like. The following can be also used as the n-type organic semiconductor: TCNQ (represented by Chem. 16 below); TCE (represented by Chem. 17 below); benzoquinone (represented by Chem. 18 below); 2,6-naphthoquinone (represented by Chem. 19 below); DDQ (represented by Chem. 20 below), p-fluoranil (represented by Chem. 21 below); tetrachlorodiphenoquinone (represented by Chem. 22 below); nickelbis(diphenylglyoxime) (represented by Chem. 23 below); and the like. Further, an electron transporting material used for the organic EL etc., such as Alq₃ (represented by Chem. 24 below), BCP (represented by Chem. 25 below), or PBD (represented by Chem. 26 below) may be also applied thereto.


Chem. 10

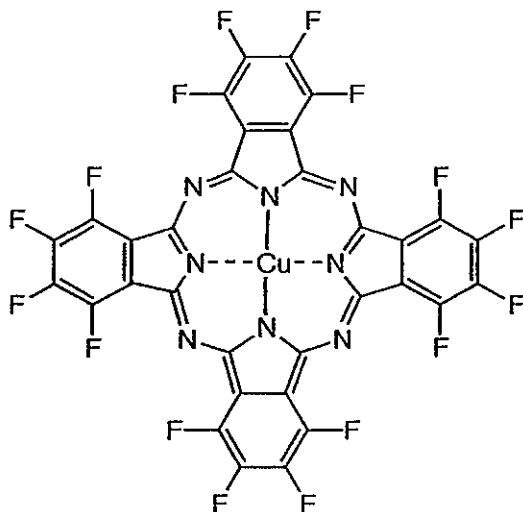


Chem. 11

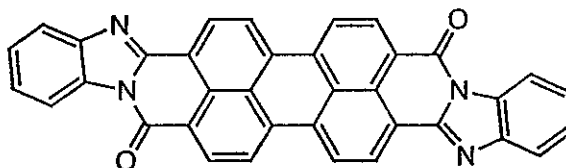


Chem. 12

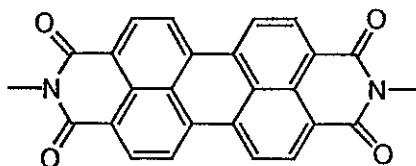


Chem. 13

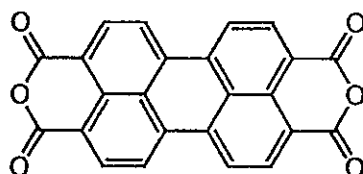


5 Chem. 14.



Chem. 15




Chem. 16




10

Chem. 17




Chem. 18




15


Chem. 19




Chem. 20




Chem. 21




5 Chem. 22



Chem. 23




Chem. 24




10

Chem. 25



Chem. 26

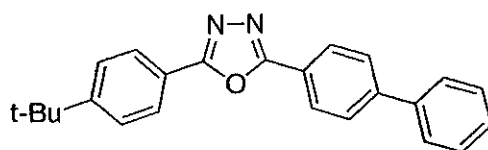


15


Further, in another preferred technique, an organic compound acceptor (electron acceptor) and an organic compound donor (electron donor) are mixed and a charge-transfer complex is formed to make the conductive thin film layer to create conductivity to serve as the conductive thin film layer. The charge-transfer complex crystallizes easily and is not easy to apply as a film. However, the conductive thin film layer according to the present invention may be formed as a thin layer or in a cluster-shape (as long as the carriers can be injected). Therefore, no significant problems occur.

Representative examples of combinations for the charge-transfer complex include the TTF-TCNQ combination shown in Chem. 27 shown below, and metal/organic acceptors such as K-TCNQ and Cu-TCNQ. Other combinations include [BEDT-TTF]-TCNQ (Chem. 28 below), (Me)₂P-C₁₈TCNQ (Chem. 29 below), BIPA-TCNQ (Chem. 30 below), and Q-TCNQ (Chem. 31 below). Note that, these charge-transfer complex thin films can be applied either as deposited films, spin-coated films, LB film, polymer binder dispersed films, or the like.

Chem. 27




TTF




TCNQ

Chem. 28




BEDT-TTF




TCNQ

Chem. 29




(Me)₂P




C₁₈TCNQ

Chem. 30




BIPA




TCNQ

5

Chem. 31



Q



TCNQ

10 Further, as a structural example of a conductive thin-film layer, a technique of doping an acceptor or a donor into an organic semiconductor to apply a dark conductivity thereto is preferably used. An organic compound having a π -conjugate system represented by a conductive polymer etc. may be used for the organic semiconductor. Examples of the conductive polymer include materials put
15 into practical use, such as poly(ethylenedioxythiophene) (abbreviated to PEDOT), polyaniline, or polypyrrole, and in addition thereto, polyphenylene derivatives, polythiophene derivatives, and poly(paraphenylene vinylene) derivatives.

Also, when the acceptor is doped, it is preferable that a p-type material be used for the organic semiconductor. Examples of the p-type organic

semiconductor may include those represented by Chems. 1 to 9 as described above. At this time, Lewis acid (strongly acidic dopant) such as FeCl_3 (III), AlCl_3 , AlBr_3 , AsF_6 , or a halogen compound may be used as the acceptor (Lewis acid can function as the acceptor).

5 Further, in the case where the donor is doped, it is preferable to use an n-type material for the organic semiconductor. Examples of n-type organic semiconductors include the above-mentioned Chems. 10 to 26 and the like. Then, for the donor, alkali metals such as represented by Li, K, Ca, Cs and the like, or a Lewis base such as an alkali earth metal (the Lewis base can function as the donor)
10 may be used.

More preferably, several of the structures described above can be combined to serve as the conductive thin film layer. In other words, for example, on one side or both sides of an inorganic thin film such as the above-mentioned metallic thin film, metallic oxide thin film, or compound semiconductor thin film can be formed
15 with a thin film in which a p-type organic semiconductor is mixed with an n-type organic semiconductor, or the charge-transfer complex thin film, or the doped conductive high molecular thin film, or a p-type organic semiconductor doped with the acceptor, or an n-type organic semiconductor doped with the donor. In such a case, it is effective to use the charge-transfer complex thin film in place of the
20 inorganic thin film.

Further, by layering the n-type organic semiconductor thin film that is doped with the donor and the p-type organic semiconductor thin film that is doped with the acceptor to have these serve as the semiconductor thin film layer, it becomes a functional organic semiconductor layer into which the holes and the
25 electrons can both be injected effectively. Furthermore, a technique is also considered in which the donor doped n-type organic semiconductor thin film and the acceptor doped p-type organic semiconductor thin film or laminated onto one side or both sides of the thin film in which the p-type organic semiconductor thin film and the n-type organic semiconductor thin film are mixed together.

30 Note that, all the types of the thin film which are given above as structures

for the above-mentioned semiconductor thin film layer do not need to be formed in film shapes, but rather they may be also formed as island shapes.

By applying the above-mentioned semiconductor thin film layer in the present invention, it becomes possible to manufacture the organic semiconductor
5 element with high reliability and good yield.

As an example, the organic thin film layer of the present invention can be structured such that light emission is obtained by flowing the electric current, to thereby obtain the organic EL element. Thus, the organic EL element of the present invention is also effective because the efficiency can also be improved.

10 When used in this way, the structure of the organic thin film layer (i.e., the organic EL layer) may be the organic EL element organic EL layer structure and constitute materials that are generally used. Specifically, many variations are possible such as a laminated structure described in Reference 2 with the hole transporting layer and the electron transporting layer, and a single-layer structure
15 using the high-molecular compound, and the high efficiency element using light emission from the triplet excited state. Further, as described above, the colors from each of the organic EL layers as different emission colors can be mixed as different colors to enable an application as a long-life white color light emission element.

20 Regarding the anode the organic EL element, if the light is to be made to exit from the anode side, then ITO (indium tin oxide), IZO (indium zinc oxide), and other such transparent conductive inorganic compounds can be often used. An ultra thin film of gold or the like is also possible. If the anode does not have to be transparent (i.e., in the case where the light is made to exit from the cathode side),
25 then a metal/alloy and or a conductive body which does not transmit light but which has a somewhat large work function may be used, such as W, Ti, and TiN.

For the organic EL element cathode, a metal or alloy with a small normal work function such as an alkali metal, alkali earth metal or rare earth metal is used. An alloy including these metallic elements may be used as well. For example, an
30 Mg:Ag alloy, an Al:Li alloy, Ba, Ca, Yb, Er, and the like can be used. Further, in

the case where the light is to be made to exit from the cathode side, an ultra thin film made of the metal/alloy may be used.

Further, for example, by using the organic thin film layer according to the present invention as the structure that generates the electromotive force by
5 absorbing the light, the organic solar battery can be obtained. Thus, the organic solar battery of the present invention is effective because it improves efficiency.

When structured in this manner, the structure of the functional organic thin film layer may use the structure and structure materials that are generally used in the functional organic thin film layer of the organic solar battery. A specific
10 example is the laminated structure with the p-type organic semiconductor and the n-type organic semiconductor, such as is described in Reference 3.

Embodiments

[Embodiment 1]

15 In accordance with the present embodiment, a specific example will be given of the organic EL element according to the present invention using the charge-transfer complex as the conductive thin film layer. FIG. 8 shows an element structure of the organic EL element.

First, on a glass substrate 801 on which ITO as an anode 802 is deposited
20 into a film with a thickness of about 100 nm, N-N'-bis(3-methylphenyl)-N,N'-diphenyl-benzidine (abbreviated to TPD) as the hole transporting material is deposited by 50 nm to obtain a hole transporting layer 804a. Next, tris(8-quinolinolato)aluminum (abbreviated to Alq) as a light emitting material having an electron transporting property is deposited by 50 nm to obtain an
25 electron-transporting and light emitting layer 805a.

A first organic EL layer 810a is formed in the above manner. Thereafter, TTF and TCNQ are codeposited at a ratio of 1:1 as a conductive thin film layer 806, forming a layer with a thickness of 10 nm.

After that, 50 nm of TPD is deposited as a hole transporting layer 804b, and
30 deposited on top of this is 50 nm of Alq, which serves as an electron transporting

layer/light emitting layer 805b. Thus, a second organic EL layer 810b is formed.

Finally, as the cathode 803, Mg and Ag are codeposited at an atomic ratio of 10:1, and the cathode 803 is formed to have a thickness of 150 nm, to thereby obtain the organic EL element of the present invention.

5

[Embodiment 2]

In accordance with this embodiment, a specific example is shown of an organic EL element of the present invention, in which an organic semiconductor that is the same as used in the organic EL layer is included in the conductive thin
10 film layer, and the acceptor and the donor are doped to make the organic EL element conductive. FIG. 9 shows an example of an element structure of the organic EL element.

First, 50 nm of TPD for serving as the hole transport material is deposited onto a glass substrate 901 which has approximately 100 nm of ITO serving as an
15 anode 902. Next, 50 nm of Alq which serves as the electron transporting light-emission material is deposited, and this serves as an electron transporting layer/light emitting layer 905a.

After a first organic EL layer 910a is formed in this way, 5 nm of a layer 906 is codeposited with the Alq so that the donor TTF constitutes 2 mol%. Then,
20 5 nm of a layer 907 is codeposited with the TPD so that the acceptor TCNQ constitutes 2 mol%, to serve as a conductive thin film layer 911.

After that, 50 nm of TPD is deposited as a hole transporting layer 904b, and deposited on top of this is 50 nm of Alq, which serves as an electron transporting layer/light emitting layer 905b. Thus, a second organic EL layer 910b is formed.

25 Finally, as the cathode 903, Mg and Ag are codeposited at an atomic ratio of 10:1, and the cathode 903 is formed to have a thickness of 150 nm, to thereby obtain the organic EL element of the present invention. The element can be manufactured simply by the organic semiconductor in the organic EL layer as the material for structuring the conductive thin film layer, and mixing the donor and
30 acceptor, thus being extremely simple and effective.

[Embodiment 3]

In accordance with the present embodiment, a specific example is shown of a wet-type organic EL element, in which an electrical light emitting polymer is used
5 for the organic EL layer and the conductive thin film layer is formed of a conductive polymer. FIG. 10 shows an element structure of the organic EL element.

First, onto a glass substrate 1001 on which ITO as an anode 1002 is deposited into a film with a thickness of about 100 nm, a mixed aqueous solution of
10 polyethylene dioxythiophene/polystyrene sulfonic acid (abbreviated to PEDOT/PSS) is applied by spin coating to evaporate moisture, so that a hole injecting layer 1004 is formed with a thickness of 30 nm. Next, poly(2-methoxy-5-(2'-ethyl-hexoxy)-1,4-phenylenevinylene) (abbreviated to MEH-PPV) is deposited into a film with a thickness of 100 nm by spin coating to
15 obtain a light emitting layer 1005a.

A first organic EL layer 1010a is formed in the above manner. Thereafter, a 30 nm film of PEDOT/PSS is applied by spin coating, to serve as a conductive thin film layer 1006.

Then, after that, a 100 nm film of MEH-PPV is applied by spin coating, to
20 serve as a light emitting layer 1005b. Note that, since the conductive thin film layer is made of the same material as the hole injecting layer, this second organic EL layer 1010b does not need a hole injecting layer formed to it. Therefore, in a case where a third and a fourth organic EL layer are to be laminated onto this, a conductive thin film layer PEDOT/PSS and a light-emission layer MEH-PPV can
25 be layered alternately according to extremely simple manipulations.

Finally, 150 nm of Ca is deposited as the cathode. On top of this, 150 nm of Al is deposited as a cap to prevent oxidization of Ca.

[Embodiment 4]

30 In accordance with the present invention, a specific example is shown of a

organic solar battery of the present invention, in which a mix of the p-type organic semiconductor and the n-type organic semiconductor is applied as the conductive thin film layer.

First, 30 nm of CuPc, which is the p-type organic semiconductor, is
5 deposited onto the glass substrate that has approximately 100 nm of ITO applied onto it as a transparent electrode. Next, 50 nm of PV, which serves as the n-type organic semiconductor, is deposited, and CuPc and PV are used to form a p-n junction in the organic semiconductor. This becomes a first functional organic thin film layer.

10 After that, CuPc and PV are codeposited at a 1:1 ratio as the conductive thin film layer to have a thickness of 10 nm. Further, 30 nm of CuPc is deposited, and on top of that 50 nm of PV is deposited, whereby creating a second functional organic thin film layer.

Finally, 150 nm of Au is applied as the electrode. The organic solar
15 battery structured as described above is extremely effective because it can realize the present invention simply by ultimately using only two types of organic compounds.

By reducing the present invention to practice, it becomes possible to provide the organic semiconductor element which is highly reliable and has good
20 yield, without having to use the conventional ultra thin film. Further, particularly in the photoelectronic device using the organic semiconductor, the efficiency of the photoelectronic device can be improved.

Claims:

1. A light emitting device comprising:
an anode;
a cathode comprising Ag and Mg;
a first electroluminescent layer between the anode and the cathode; and
a second electroluminescent layer between the first electroluminescent layer and the cathode, wherein the first electroluminescent layer and the second electroluminescent layer are overlapped with each other,
wherein each of the first electroluminescent layer and the second electroluminescent layer comprises a light emitting layer comprising an organic material, and
wherein the cathode is capable of transmitting light from the first electroluminescent layer and the second electroluminescent layer.
2. The light emitting device according to claim 1 further comprising a first layer and a second layer,
wherein the first layer is between the first electroluminescent layer and the second electroluminescent layer, and the first layer comprises an organic compound and an acceptor, and
wherein the second layer is between the first electroluminescent layer and the first layer, and the second layer comprises an n-type semiconductor.
3. The light emitting device according to claim 2 wherein the organic compound is doped with the acceptor.
4. The light emitting device according to claim 2 wherein the first layer has a conductivity of 10^{-10} s/m² or greater.
5. The light emitting device according to claim 2 wherein the second layer comprises an organic compound and a donor.
6. A light emitting device comprising:
an anode;
a cathode;
a first electroluminescent layer between the anode and the cathode; and
a second electroluminescent layer between the first electroluminescent layer and the cathode, wherein the first electroluminescent layer and the second electroluminescent layer are overlapped with each other,
wherein each of the first electroluminescent layer and the second electroluminescent layer comprises a light emitting layer comprising an organic material, and
wherein at least one of the first electroluminescent layer and the second electroluminescent layer emits light from a triplet excited state.

7. The light emitting device according to claim 6 further comprising a first layer and a second layer,

wherein the first layer is between the first electroluminescent layer and the second electroluminescent layer, and the first layer comprises an organic compound and an acceptor, and

wherein the second layer is between the first electroluminescent layer and the first layer, and the second layer comprises an n-type semiconductor.

8. The light emitting device according to claim 7 wherein the organic compound is doped with the acceptor.

9. The light emitting device according to claim 7 wherein the first layer has a conductivity of 10^{-10} s/m² or greater.

10. The light emitting device according to claim 7 wherein the second layer comprises an organic compound and a donor.

11. The light emitting device according to claim 6 wherein the cathode comprises a metal alloy, and the cathode is enough thin to let light from the first electroluminescent layer and from the second electroluminescent layer out through the cathode.

12. A light emitting device comprising:

an anode;

a cathode;

a first electroluminescent layer between the anode and the cathode; and
a second electroluminescent layer between the first electroluminescent layer and the cathode, wherein the first electroluminescent layer and the second electroluminescent layer are overlapped with each other,

wherein each of the first electroluminescent layer and the second electroluminescent layer comprises a light emitting layer comprising an organic material, and

wherein at least one of the first electroluminescent layer and the second electroluminescent layer comprises a bipolar organic compound.

13. The light emitting device according to claim 12 further comprising a first layer and a second layer,

wherein the first layer is between the first electroluminescent layer and the second electroluminescent layer, and the first layer comprises an organic compound and an acceptor, and

wherein the second layer is between the first electroluminescent layer and the first layer, and the second layer comprises an n-type semiconductor.

14. The light emitting device according to claim 13 wherein the organic compound is doped with the acceptor.

15. The light emitting device according to claim 13 wherein the first layer

has a conductivity of 10^{-10} s/m² or greater.

16. The light emitting device according to claim 13 wherein the second layer comprises an organic compound and a donor.

17. The light emitting device according to claim 12 wherein the cathode comprises a metal alloy, and the cathode is enough thin to let light from the first electroluminescent layer and from the second electroluminescent layer out through the cathode.

18. A light emitting device comprising:
an anode;
a cathode;
a first electroluminescent layer between the anode and the cathode; and
a second electroluminescent layer between the first electroluminescent layer and the cathode, wherein the first electroluminescent layer and the second electroluminescent layer are overlapped with each other,
wherein each of the first electroluminescent layer and the second electroluminescent layer comprises a light emitting layer comprising an organic material, and
wherein at least one of the first electroluminescent layer and the second electroluminescent layer comprises a polymer.

19. The light emitting device according to claim 18 further comprising a first layer and a second layer,
wherein the first layer is between the first electroluminescent layer and the second electroluminescent layer, and the first layer comprises an organic compound and an acceptor, and
wherein the second layer is between the first electroluminescent layer and the first layer, and the second layer comprises an n-type semiconductor.

20. The light emitting device according to claim 19 wherein the organic compound is doped with the acceptor.

21. The light emitting device according to claim 19 wherein the first layer has a conductivity of 10^{-10} s/m² or greater.

22. The light emitting device according to claim 19 wherein the second layer comprises an organic compound and a donor.

23. The light emitting device according to claim 18 wherein the cathode comprises a metal alloy, and the cathode is enough thin to let light from the first electroluminescent layer and from the second electroluminescent layer out through the cathode.

24. A light emitting device comprising:
an anode over a substrate;;

a cathode over the anode, the cathode comprising Ag and Mg;
a first electroluminescent layer between the anode and the cathode; and
a second electroluminescent layer between the first electroluminescent layer and the cathode, wherein the first electroluminescent layer and the second electroluminescent layer are overlapped with each other, and
wherein the cathode is capable of transmitting light from the first electroluminescent layer and the second electroluminescent layer.

25. The light emitting device according to claim 24 further comprising a first layer and a second layer,

wherein the first layer is between the first electroluminescent layer and the second electroluminescent layer, and the first layer comprises an organic compound and an acceptor, and

wherein the second layer is between the first electroluminescent layer and the first layer, and the second layer comprises an n-type semiconductor.

26. The light emitting device according to claim 25 wherein the organic compound is doped with the acceptor.

27. The light emitting device according to claim 25 wherein the first layer has a conductivity of 10^{-10} s/m² or greater.

28. The light emitting device according to claim 25 wherein the second layer comprises an organic compound and a donor.

29. A light emitting device comprising:

an anode over a substrate;

a cathode over the anode;

a first electroluminescent layer between the anode and the cathode; and

a second electroluminescent layer between the first electroluminescent layer and the cathode, wherein the first electroluminescent layer and the second electroluminescent layer are overlapped with each other,

wherein at least one of the first electroluminescent layer and the second electroluminescent layer emits light from a triplet excited state.

30. The light emitting device according to claim 29 further comprising a first layer and a second layer,

wherein the first layer is between the first electroluminescent layer and the second electroluminescent layer, and the first layer comprises an organic compound and an acceptor, and

wherein the second layer is between the first electroluminescent layer and the first layer, and the second layer comprises an n-type semiconductor.

31. The light emitting device according to claim 30 wherein the organic compound is doped with the acceptor.

32. The light emitting device according to claim 30 wherein the first layer

has a conductivity of 10^{-10} s/m² or greater.

33. The light emitting device according to claim 30 wherein the second layer comprises an organic compound and a donor.

34. The light emitting device according to claim 29 wherein the cathode comprises a metal alloy, and the cathode is enough thin to let light from the first electroluminescent layer and from the second electroluminescent layer out through the cathode.

35. A light emitting device comprising:
an anode over a substrate;
a cathode over the anode;
a first electroluminescent layer between the anode and the cathode; and
a second electroluminescent layer between the first electroluminescent layer and the cathode, wherein the first electroluminescent layer and the second electroluminescent layer are overlapped with each other,
wherein at least one of the first electroluminescent layer and the second electroluminescent layer comprises a bipolar organic compound.

36. The light emitting device according to claim 35 further comprising a first layer and a second layer,
wherein the first layer is between the first electroluminescent layer and the second electroluminescent layer, and the first layer comprises an organic compound and an acceptor, and
wherein the second layer is between the first electroluminescent layer and the first layer, and the second layer comprises an n-type semiconductor.

37. The light emitting device according to claim 36 wherein the organic compound is doped with the acceptor.

38. The light emitting device according to claim 36 wherein the first layer has a conductivity of 10^{-10} s/m² or greater.

39. The light emitting device according to claim 36 wherein the second layer comprises an organic compound and a donor.

40. The light emitting device according to claim 35 wherein the cathode comprises a metal alloy, and the cathode is enough thin to let light from the first electroluminescent layer and from the second electroluminescent layer out through the cathode.

41. A light emitting device comprising:
an anode over a substrate;
a cathode over the anode;
a first electroluminescent layer between the anode and the cathode; and
a second electroluminescent layer between the first electroluminescent

layer and the cathode, wherein the first electroluminescent layer and the second electroluminescent layer are overlapped with each other,

wherein each of the first electroluminescent layer and the second electroluminescent layer comprises a light emitting layer comprising an organic material, and

wherein at least one of the first electroluminescent layer and the second electroluminescent layer comprises a polymer.

42. The light emitting device according to claim 41 further comprising a first layer and a second layer,

wherein the first layer is between the first electroluminescent layer and the second electroluminescent layer, and the first layer comprises an organic compound and an acceptor, and

wherein the second layer is between the first electroluminescent layer and the first layer, and the second layer comprises an n-type semiconductor.

43. The light emitting device according to claim 42 wherein the organic compound is doped with the acceptor.

44. The light emitting device according to claim 42 wherein the first layer has a conductivity of 10^{-10} s/m² or greater.

45. The light emitting device according to claim 42 wherein the second layer comprises an organic compound and a donor.

46. The light emitting device according to claim 41 wherein the cathode comprises a metal alloy, and the cathode is enough thin to let light from the first electroluminescent layer and from the second electroluminescent layer out through the cathode.