

(43) International Publication Date
20 December 2012 (20.12.2012)

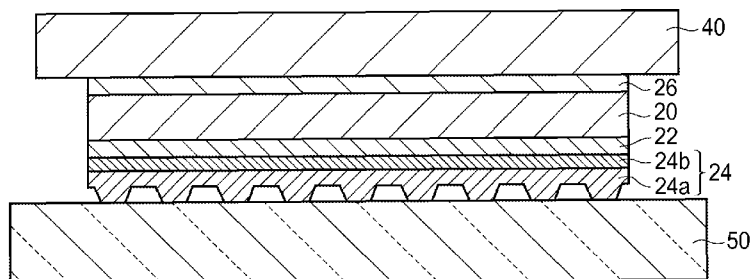
- (51) **International Patent Classification:**
B24D 3/20 (2006.01) **B24D 3/34** (2006.01)
B24D 11/00 (2006.01)
- (21) **International Application Number:**
PCT/US2012/041535
- (22) **International Filing Date:**
8 June 2012 (08.06.2012)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:**
2011-131587 13 June 2011 (13.06.2011) JP
- (71) **Applicant (for all designated States except US):** **3M INNOVATIVE PROPERTIES COMPANY** [US/US]; 3M Center, Post Office Box 33427, Saint Paul, MN 55133-3427 (US).
- (72) **Inventors; and**
- (75) **Inventors/Applicants (for US only):** **FUJITA, Jun** [JP/JP]; 33-1, Tamagawadai 2-chome, Setagaya 158-8583 (JP). **SAITO, Yusuke** [JP/JP]; 33-1, Tamagawadai 2-chome, Setagaya 158-8583 (JP).
- (74) **Agents:** **KULPRATHIPANJA, Ann** et al.; 3M Center, Office of Intellectual Property Center, Post Office Box 33427, Saint Paul, MN 55133-3427 (US).

(81) **Designated States** (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) **Designated States** (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— without international search report and to be republished upon receipt of that report (Rule 48.2(g))

(54) **Title:** STRUCTURAL MEMBER FOR POLISHING**FIG. 4**

(57) **Abstract:** A structural member for polishing including a supporting member, a polishing material, and an adhesive agent layer bonding these together. The adhesive agent layer includes a polymer of monomers including from 58 to 85 wt% of a first monomer, from 2 to 7 wt% of a second monomer, and from 10 to 40 wt% of a third monomer. The first monomer is an alkyl (meth)acrylate having an alkyl group with carbon counts from 8 to 18 carbon atoms and provides a homopolymer with a glass transition temperature of 0°C or less. The second monomer is a polar monomer that provides a homopolymer with a glass transition temperature of 50°C or greater. The third monomer is an alkyl (meth)acrylate having an alkyl group with carbon counts from 4 to 18 carbon atoms or an aralkyl group having carbon counts from 7 to 18 carbon atoms and provides a homopolymer with a glass transition temperature of 10°C or greater.

