



(43) International Publication Date
27 December 2013 (27.12.2013)

- (51) International Patent Classification:
B65D 75/66 (2006.01) *B65D 85/10* (2006.01)
- (21) International Application Number:
PCT/EP2013/062651
- (22) International Filing Date:
18 June 2013 (18.06.2013)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
12172406.6 18 June 2012 (18.06.2012) EP
- (71) Applicant: JT INTERNATIONAL SA [CH/CH]; 1 rue de la Gabelle, 1211 Geneva 26 (CH).
- (72) Inventor: TRITZ, Franz-Josef; Brückenstrasse 37, 54439 Palzem (DE).
- (74) Agent: HALEY, Stephen; Gill Jennings & Every LLP, The Broadgate Tower, 20 Primrose Street, London Greater London EC2A 2ES (GB).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM,

AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: TEAR TAPE FOR PRODUCT WRAPPER

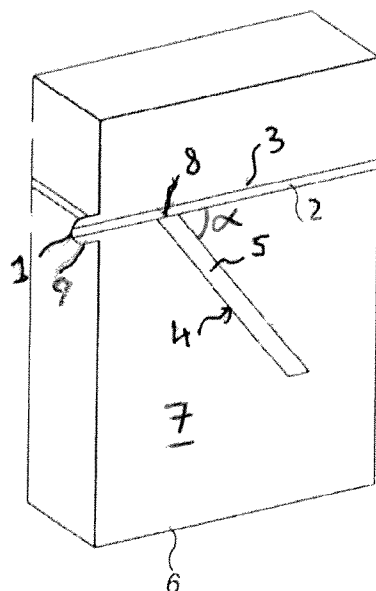


FIG. 1

(57) Abstract: A tear-tape (1) for opening a product wrapper (6), said tear-tape (1) comprising at least one band (2) to be provided on a surface of the product wrapper (6), wherein the tear-tape comprises at least two intersecting branches (3, 4) and wherein the intersection (8) between said branches is located between distal ends of a first branch such that, in use, opening of said product wrapper (6) follows a first opening stage along said first branch (3), from a first end thereof, followed by a second stage along the two intersecting branches (3, 4), from said intersection (8) until at least one of a second end of the first branch (3) and an end of the second branch (4).

