

(51) International Patent Classification:
H04N 7/26 (2006.01)(21) International Application Number:
PCT/US2012/061693(22) International Filing Date:
24 October 2012 (24.10.2012)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:

61/551,325	25 October 2011 (25.10.2011)	US
61/554,887	2 November 2011 (02.11.2011)	US
61/579,488	22 December 2011 (22.12.2011)	US
61/589,143	20 January 2012 (20.01.2012)	US
13/532,610	25 June 2012 (25.06.2012)	US

(71) Applicant: **QUALCOMM INCORPORATED** [US/US];
ATTN: International IP Administration, 5775 Morehouse
Drive, San Diego, California 92121-1714 (US).

(72) Inventors: **VAN DER AUWERA, Geert**; 5775 Morehouse Drive, San Diego, California 92121 (US). **KAR-CZEWICZ, Marta**; 5775 Morehouse Drive, San Diego, California 92121 (US). **WANG, Xianglin**; 5775 Morehouse Drive, San Diego, California 92121 (US).


(74) Agent: **VREDEVELD, Albert, W.**; Shumaker and Siefert, P.A., 1625 Radio Drive, Suite 300, Woodbury, Minnesota 55125 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ,

[Continued on next page]

(54) Title: DETERMINING BOUNDARY STRENGTH VALUES FOR DEBLOCKING FILTERING FOR VIDEO CODING

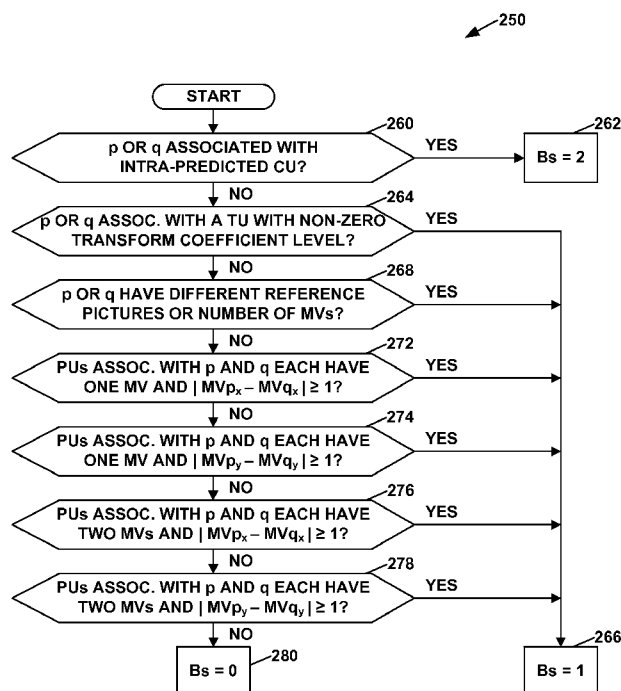

(57) Abstract: A video coder associates a first boundary strength value with an edge in response to determining that a first video block or a second video block is associated with an intra-predicted coding unit (CU), where the edge occurs at a boundary between the first video block and the second video block. The video coder may associate a second or a third boundary strength value with the edge when neither the first video block nor the second video block is associated with an intra-predicted CU. The video coder may apply one or more deblocking filters to samples associated with the edge when the edge is associated with the first boundary strength value or the second boundary strength value. The third boundary strength value indicates that the deblocking filters are turned off for the samples associated with the edge.



TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

— *as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii))*

Published:

— *with international search report (Art. 21(3))*

Declarations under Rule 4.17:

— *as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))*