

POLYLACTIDE/SILICON-CONTAINING BLOCK COPOLYMERS FOR NANOLITHOGRAPHY

FIELD OF THE INVENTION

5 The present invention includes a diblock copolymer system that self-assembles at very low molecular weights to form very small features. In one embodiment, one polymer in the block copolymer contains silicon, and the other polymer is a polylactide. In one embodiment, the block copolymer is synthesized by a combination of anionic and ring opening polymerization reactions. In one embodiment, the purpose of this block copolymer is to form nanoporous
10 materials that can be used as etch masks in lithographic patterning.

BACKGROUND OF THE INVENTION

 The improvement in areal density in hard disk drives using conventional multigrain media is currently bound by the superparamagnetic limit [1]. Bit patterned media can
15 circumvent this limitation by creating isolated magnetic islands separated by a nonmagnetic material. Nanoimprint lithography is an attractive solution for producing bit patterned media if a template can be created with sub-25 nm features [2]. Resolution limits in optical lithography and the prohibitive cost of electron beam lithography due to slow throughput [3] necessitate a new template patterning process. The self-assembly of diblock copolymers into well-defined
20 structures [4] on the order of 5-100 nm produces features on the length scale required for production of bit patterned media. This is most efficiently accomplished by using block copolymers to produce templates for imprint lithography [5]. With the availability of the proper template, imprint lithography can be employed to produce bit-patterned media efficiently. Previous research has targeted block copolymers that produce hexagonally packed cylindrical

morphology with selective silicon incorporation into one block for etch resistance [6] through post-polymerization SiO₂ growth [7], silica deposition using supercritical CO₂ [8], and silicon-containing ferrocenyl monomers [9]. What is needed is a method to create an imprint template with sub-100 nm features with the desired structural alignment of nanostructures that can be etched with the good oxygen etch contrast that silicon provides.

SUMMARY OF THE INVENTION

The present invention includes a diblock copolymer system that self-assembles at very low molecular weights to form very small features. In one embodiment, one polymer in the block copolymer contains silicon, and the other polymer is polylactide. In one embodiment, the block copolymer is synthesized by a combination of anionic and ring opening polymerization reactions. In one embodiment, the purpose of this block copolymer is to form nanoporous materials that can be used as etch masks in lithographic patterning.

The present invention contemplates silicon and lactide-containing compositions, methods of synthesis, and methods of use. More specifically, the present invention relates, in one embodiment, to a block copolymer derived from two (or more) monomeric species, at least one of which comprising silicon and at least one of which incorporates a lactide. Such compounds have many uses including multiple applications in the semiconductor industry including making templates for nanoimprint lithography and biomedical applications.

In one embodiment, the invention relates to a method of synthesizing a silicon and lactide-containing block copolymer, comprising: a) providing first and second monomers, said first monomer comprising a silicon atom and said second monomer being a lactide based monomer lacking silicon that can be polymerized; b) treating said second monomer under conditions such that reactive polymer of said second monomer is formed; c) reacting said first

monomer with said reactive polymer of said second monomer under conditions such that said silicon-containing block copolymer is synthesized; and d) wherein the glass transitions of both blocks are above room temperature. In one embodiment, at least one of said blocks is cross-linkable. In one embodiment, a third monomer is provided and said block copolymer is a triblock copolymer. In one embodiment, said block copolymers form nanostructured materials that can be used as etch masks in lithographic patterning processes. In one embodiment, said block co-polymer comprised of at least one block of a lactide and at least one block of a silicon containing polymer or oligomer with at least 10 wt% silicon. In one embodiment, said block copolymer is endcapped. In one embodiment, said block copolymer is endcapped with a functional group. In one embodiment, said block copolymer is endcapped with a hydroxyl functionality by reacting with ethylene oxide. In one embodiment, the method further comprises e) precipitating said silicon-containing block copolymer in methanol. In one embodiment, one of the blocks is polytrimethylsilylstyrene. In one embodiment, said first monomer is trimethylsilylstyrene. In one embodiment, said first monomer is a silicon-containing methacrylate. In one embodiment, said first monomer is methacryloxymethyltrimethylsilane (MTMSMA). In one embodiment, the method further comprises the step f) coating a substrate with said block copolymer so as to create a block copolymer film. In one embodiment, said substrate comprises silicon. In one embodiment, said substrate is a silicon wafer. In one embodiment, said substrate is quartz. In one embodiment, said substrate is glass. In one embodiment, said substrate is plastic. In one embodiment, said plastic includes, but is not limited to polyethylene terephthalate (PET), Teflon (polytetrafluoroethylene or PTFE), etc. In one embodiment, said substrate is a transparent substrate. In one embodiment, said substrate is coated with a substrate surface energy neutralizing layer with surface energy in between that of two blocks. In one embodiment, said substrate surface energy neutralizing layer is selected from the

group consisting of: (a) high T_g polymer, (b) a cross-linked polymer, (c) vapor deposited polymer such as parylene, (d) small molecule derivatives of silylating agents, and (e) polymer brush by end-attaching polymer to substrate. In one embodiment, the method further comprises the step g) treating said film under conditions such that nanostructures form. In one embodiment, said treating comprises annealing. In one embodiment, said annealing is by exposure to solvent vapors. In one embodiment, said annealing is by heating. In one embodiment, said nanostructures are selected from the group consisting of: lamellae, cylinders, vertically aligned cylinders, horizontally aligned cylinders, spheres, gyroids, network structures, and hierarchical nanostructures. In one embodiment, said nanostructures comprise spherical structures. In one embodiment, said nanostructures comprise cylindrical structures, said cylindrical structures being substantially vertically aligned with respect to the plane of the surface. In one embodiment, said treating comprises exposing said coated surface to a saturated atmosphere of acetone, THF, cyclohexane, or other vaporizing agent or combinations thereof. In one embodiment, said surface is on a silicon wafer. In one embodiment, said surface is glass. In one embodiment, said surface is quartz. In one embodiment, said substrate is not pre-treated with a surface energy neutralizing layer prior to step f). In one embodiment, said substrate is pre-treated with a surface energy neutralizing layer prior to step f). In one embodiment, a third monomer is provided and said block copolymer is a triblock copolymer. In one embodiment, the invention relates to the film made according to the process of described above.

In one embodiment, the invention relates to a method of forming nanostructures on a surface, comprising: a) a. providing a silicon and lactide-containing block copolymer block copolymer and a surface; b) spin coating said block copolymer on said surface to create a coated surface; and c). treating said coated surface under conditions such that nanostructures are formed on said surface. In one embodiment, said nanostructures comprises cylindrical structures,

said cylindrical structures being substantially vertically aligned with respect to the plane of the surface. In one embodiment, said treating comprises exposing said coated surface to a saturated atmosphere of acetone or THF. In one embodiment, said surface is on a silicon wafer. In one embodiment, said surface is glass. In one embodiment, said surface is quartz. In one
5 embodiment, said surface is not pre-treated with a substrate neutralization layer prior to step b). In one embodiment, said surface is pre-treated with a cross-linked polymer prior to step b). In one embodiment, the invention relates to the film made according to the process of described above. In one embodiment, the invention further comprising the step d) etching said nanostructure-containing coated surface.

10

BRIEF DESCRIPTION OF THE DRAWINGS

For a more complete understanding of the features and advantages of the present invention, reference is now made to the detailed description of the invention along with the accompanying figures.

15 Figure 1 shows non-limiting structures of illustrative silicon-containing monomers and polymers.

Figure 2 shows the synthesis of PTMSS-b-PLA by a combination of anionic and ring-opening polymerization reactions.

Figure 3 shows the synthesis of polylactide (PLA) homopolymer.

20 Figure 4 shows the integrated SAXS curves of a) PTMSS₆-b-PLA_{4,1} and b) PTMSS₆-b-PLA_{7,1} where the arrows indicate the location of the primary and higher-order scattering peaks. Subscripted numbers indicate block molecular weight in kilograms/mole.

Figure 5 shows the AFM phase images of a PTMSS₆-b-PLA_{4,1} film a) as-cast and b) after thermally annealing the sample for two hours at 120°C

Figure 6 shows the AFM phase images of a PTMSS₆-b-PLA_{4.1} film after solvent annealing under cyclohexane vapor for a) 2 hours, b) 4 hours, and c) 23 hours.

Figure 7 shows the AFM phase images of PTMSS₆-b-PLA_{7.1} a) as-cast and b) after solvent annealing under cyclohexane vapor for 4 hours.

5 Figure 8 shows the AFM height images of PTMSS₆-b-PLA_{4.1} a) after solvent annealing under cyclohexane vapor for 4 hours and b) after etching the sample in a) with oxygen plasma.

Figure 9 shows the AFM phase images of PTMSS₆-b-PLA_{4.1} a) after solvent annealing under cyclohexane vapor for 4 hours and b) after etching the sample in a) with oxygen plasma.

Table 1 shows properties of the polymers investigated.

10

DEFINITIONS

To facilitate the understanding of this invention, a number of terms are defined below. Terms defined herein have meanings as commonly understood by a person of ordinary skill in the areas relevant to the present invention. Terms such as “a”, “an” and “the” are not intended to
15 refer to only a singular entity, but include the general class of which a specific example may be used for illustration. The terminology herein is used to describe specific embodiments of the invention, but their usage does not delimit the invention, except as outlined in the claims.

In addition, atoms making up the compounds of the present invention are intended to include all isotopic forms of such atoms. Isotopes, as used herein, include those atoms having
20 the same atomic number but different mass numbers. By way of general example and without limitation, isotopes of hydrogen include tritium and deuterium, and isotopes of carbon include ¹³C and ¹⁴C. Similarly, it is contemplated that one or more carbon atom(s) of a compound of the present invention may be replaced by a silicon atom(s). Furthermore, it is contemplated that one or more oxygen atom(s) of a compound of the present invention may be replaced by a sulfur

or selenium atom(s).


An important factor in determining whether a block copolymer will self assemble is the relative volume fraction of one of the blocks, the relative incompatibility of the monomer units, measured by the Flory-Huggins interaction parameter (Greek Symbol Chi χ), and the degree of polymerization of the block copolymer. Preferably, the volume fraction of one of the blocks is 30-70, 35-65, 40-60, more preferably 50-50 and the degree of polymerization (N) and Flory-Huggins interaction parameter of the block copolymer is preferably greater than 10.5 and is more preferably greater than 25.


The block copolymer or blend thereof can be cross-linked by any convenient method. In one embodiment the block copolymer or blend thereof is deposited as a film or coating and then cross-linked using UV light or ionizing radiation. If necessary, free radical initiators or pro-rads may be added to the block copolymer or blend thereof in order to assist the cross-linking reaction. Preferably, however, the block copolymer or blend thereof comprises a cross-linking agent, especially when the block copolymer or blend thereof is used in a film-forming or coating composition. Preferably, the cross-linking agent and concentration of cross-linking agent are chosen such that the rate constant of the cross-linking reaction is relatively slow, thereby giving a relatively long pot life for the film-forming or coating composition. This is particularly important when the film-forming composition or coating composition is to be used as a printing ink or deposited using ink jet printing technology. Preferably, the rate constant of the cross-linking reaction is such that the speed of cross-linking is slower than the speed of self-assembly of the block copolymer or blend thereof.

Poly(lactic acid) or polylactide (PLA) is a thermoplastic aliphatic polyester derived from renewable resources, such as corn starch, tapioca products (roots, chips or starch) or sugarcane. Polylactide can be produced from plants and its strength and physical properties are relatively

better than those of other biodegradable resins. Accordingly, polylactide has rapidly become a focus of attention as a material alternative to existing plastics or fibers that are made from petroleum.

However, the biodegradability of polylactide is lower than that of other commonly known biodegradable plastics such as polyhydroxybutyric acid, polycaprolactone, or polybutylene succinate. For example, the quantities of biodegradable plastic-degrading bacteria in these plastics can be represented by the following sequence: polyhydroxybutyric acid $\geq$ polycaprolactone $>$ polybutylene succinate $>$ polylactide. Unlike another commonly known biodegradable plastic, i.e., aliphatic polyester, polylactide is aliphatic polyester formed by an α -ester bond. Thus, polylactide has specific properties. For example, it is not degraded by a lipase, esterase, or polyhydroxybutyric acid-degrading enzyme.

The skeletal formula of poly(lactic acid):  n . It is typically synthesized by

the following reaction: , this uses 3,6-dimethyl-1,4-dioxane-2,5-dione, also known as DL-Lactide.

The polylactide used in the present invention is preferably poly-L-lactic acid, and poly-D-lactic acid may also be used. Alternatively, a mixture or copolymer of poly-L-lactic acid and poly-D-lactic acid may be used. Further, a copolymer, which incorporates therein a unit having biodegradability such as β -propiolactone, β -butyrolactone, pivalolactone, γ -butyrolactone, γ -methyl- γ -butyrolactone, γ -ethyl- γ -butyrolactone, glycolide, lactide, δ -valerolactone, β -methyl- δ -valerolactone, ϵ -caprolactone, ethylene oxide, or propylene oxide, may be used. In addition, generally commercially available biodegradable resins such as

polyhydroxybutyric acid, polybutylene succinate, a polybutylene succinate-adipate copolymer, polycaprolactone, or polyester carbonate may be suitably blended into polylactide for the purpose of improving the physical properties thereof.

As used herein, Glass transition temperature is represented by the abbreviation T_g ,
5 Vitrification occurs when the glass transition temperature, T_g , rises to the isothermal temperature of cure, as described in Gillham, J. K. (1986) [12].

As used herein, end capping functionalities refer to functional groups that are added onto the end of a polymer. Some non-limiting endcapping functionalities might include hydroxyl, amines, azide, alkyne, carboxylic acid, halides, etc.

10 As used herein, silylating agents (also known as silanes or self-assembled monolayers) refer to organosilicon compounds with methoxy, ethoxy, or halide functionalities. Some non-limiting examples include methyldichlorosilane, methyldiethoxysilane, allyl(chloro)dimethylsilane, and (3-aminopropyl) triethoxysilane.

As used herein, brush polymers are a class of polymers that are adhered to a solid surface
15 [13]. The polymer that is adhered to the solid substrate must be dense enough so that there is crowding among the polymers which then, forces the polymers to stretch away from the surface to avoid overlapping. [14]

In the field of electronic devices, Roll-to-roll processing, also known as web processing, reel-to-reel processing or R2R, is the process of creating electronic devices on a roll of flexible
20 plastic or metal foil. In other fields predating this use, it can refer to any process of applying coatings, printing, or performing other processes starting with a roll of a flexible material and re-reeling after the process to create an output roll. A thin-film solar cell (TFSC), also called a thin-film photovoltaic cell (TFPV), is a solar cell that is made by depositing one or more thin layers (thin film) of photovoltaic material on a substrate substrate or surface. Possible


roll-to-roll substrates include, but are not limited to metalized polyethylene terephthalate, metal film (steel), glass films (e.g. Corning Gorilla Glass), graphene coated films, polyethylene naphthalate (Dupont Teonex), and Kapton film., polymer films, metalized polymer films, glass or silicon, carbonized polymer films, glass or silicon. Possible polymer films include

5 polyethylene terephthalate, kapton, mylar, etc.


As used herein, a block copolymer consists of two or more polymeric chains (blocks), which are chemically different and covalently attached to each other. Block copolymers are being suggested for many applications based primarily on their ability to form nanometer scale patterns. These self-assembled patterns are being considered as nanolithographic masks as well as templates

10 for the further synthesis of inorganic or organic structures. Such applications are made possible by taking advantage of contrasts in chemical or physical properties that lead to differential etch rates or attractions to new materials. New applications in, for example, fuel cells, batteries, data storage and optoelectronic devices generally rely on the inherent properties of the blocks . All of these uses depend on the regular self-assembly of block copolymers over macroscopic distances.


15 Trimethyl-(2-methylene-but-3-enyl)silane is represented by the following structure:

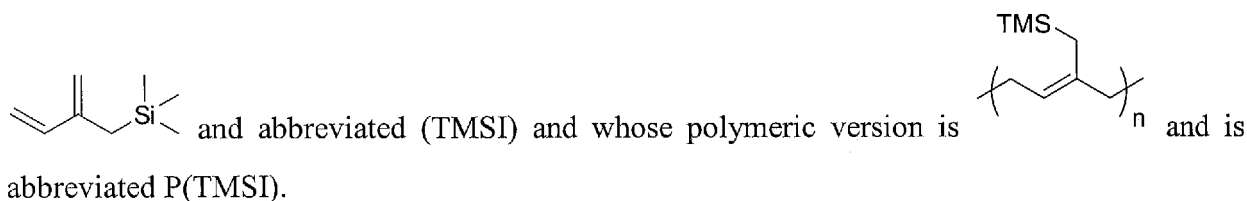

Trimethyl(4-vinylphenyl)silane is another example of a styrene derivative and is




represented by the following structure: TMS and abbreviated TMSS and whose polymeric




version is TMS and is abbreviated P(TMSS).

Tert-butyldimethyl(4-vinylphenoxy)silane is another example of a styrene derivative and




5 is represented by the following structure: OTBDMS or and abbreviated TBDMSO-St




and whose polymeric version is OTBDMS or and is abbreviated P(TBDMSO-St).


Tert-butyldimethyl(oxiran-2-ylmethoxy)silane is an example of a silicon containing

compound and is represented by the following structure: TBDMSO- or 


and is abbreviated TBDMSO-EO and whose polymeric version is
 and is abbreviated P(TBDMSO-EO).

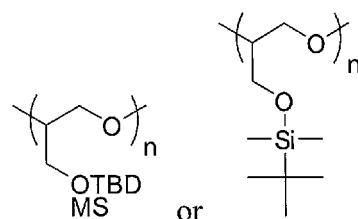



Methacryloxymethyltrimethylsilane is represented by the following structures:



and abbreviated (MTMSMA) and whose polymeric

version is  and is abbreviated P(MTMSMA).

In one embodiment,  is an example of PLA homopolymer.

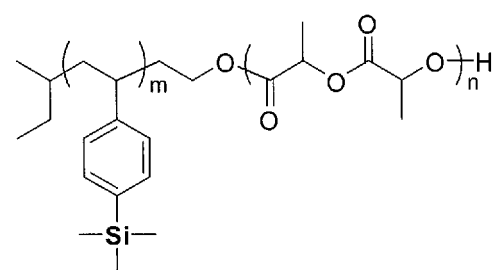In one embodiment,  is an example of Poly(trimethylsilyl styrene-b-lactide) (PTMSS-b-PLA).

The present invention also contemplates styrene “derivatives” where the basic styrene
 10 structure is modified, e.g. by adding substituents to the ring. Derivatives of any of the
 compounds shown in Figure 1 can also be used. Derivatives can be, for example,
 hydroxy-derivatives or halo-derivatives. As used herein, “hydrogen” means $-H$; “hydroxy”
 means $-OH$; “oxo” means $=O$; “halo” means independently $-F$, $-Cl$, $-Br$ or $-I$.

It is desired that the block copolymer be used to create “nanostructures” on a surface, or

“physical features” with controlled orientation. These physical features have shapes and thicknesses. For example, various structures can be formed by components of a block copolymer, such as vertical lamellae, in-plane cylinders, and vertical cylinders, and may depend on film thickness, surface treatment, and the chemical properties of the blocks. In a preferred
5 embodiment, said cylindrical structures being substantially vertically aligned with respect to the plane of the first film. Orientation of structures in regions or domains at the nanometer level (i.e. “microdomains” or “nanodomains”) may be controlled to be approximately uniform, and the spatial arrangement of these structures may also be controlled. For example, in one embodiment, domain spacing of the nanostructures is approximately 50 nm or less. The methods
10 described herein can generate structures with the desired size, shape, orientation, and periodicity. Thereafter, in one embodiment, these structures may be etched or otherwise further treated.

DETAILED DESCRIPTION OF THE INVENTION

A block copolymer (BC) is defined as two or more chemically distinct homopolymer
15 chains covalently linked together [4]. A characteristic feature of BCs is that they can self-assemble into periodic structures such as lamellae, spheres, bicontinuous gyroids, and hexagonally packed cylinders with 5–100 nm domain sizes [11]. The morphology is dictated by the volume fraction of each block (ϕ), overall degree of polymerization (N), and Flory–Huggins interaction parameter (χ), all of which can be controlled synthetically [11].

20 For nanomanufacturing applications such as microelectronics, solar cells, and membranes, thin films with cylindrical or lamellar domains aligned perpendicular to a substrate surface are most attractive [12, 13]. BC thin film behavior has been studied by many researchers [14–16], and a recent review [12] has highlighted the importance of film thickness and interfacial interactions in dictating the BC orientation. One method of inducing cylinder or lamellar

domains to orient perpendicular to the substrate is by treating the substrate with a surface modification agent such that the surface has an interfacial energy between that of each block. This type of substrate surface has been termed “neutral” because the enthalpic penalty for each block to establish contact with the substrate is approximately equal [14]. If this condition is not
5 appropriately met, the cylinders or lamellae will usually lie parallel to the substrate with the block that most prefers the surface wetting the substrate [17].

The present invention includes a diblock copolymer system that self-assembles at very low molecular weights to form very small features. In one embodiment, one polymer in the block copolymer contains silicon, in this case polytrimethylsilylstyrene, and the other polymer is
10 polylactide. In one embodiment, the block copolymer is synthesized by a combination of anionic and ring opening polymerization reactions. In one embodiment, these block copolymers can be used to form nanoporous materials that can be used as etch masks in lithographic patterning.

Block copolymers used in nanoscale lithographic patterning are typically composed of synthetic polymers only. While both polymers in the block copolymer in this invention are
15 synthetic, the monomer used to make polylactide, lactide, is derived from naturally-occurring material, lactic acid. Also, with a few exceptions, polymers researched for lithographic patterning typically do not provide a metal-containing block and therefore have little etch selectivity. The polymer described in this invention has etch resistance due slow etching of the silicon-containing block and the fast etching of the polylactide block in an oxygen etch.

20 One potential solution to overcoming the feature-size limitations of conventional lithography techniques involves using self-assembled block copolymers to pattern nanoscale features. Block copolymer lithography circumvents physical and cost limitations present in conventional techniques. Polymers with high interaction parameters can form features much smaller than those achievable by photolithography and can do so using a less time-intensive

process than electron beam lithography.

The present invention has advantages over current block copolymer systems currently used for lithographic patterning primarily because the invention allows formation of some of the smallest features achievable in known block copolymer systems. Small features correlate to higher feature density for greater storage in semiconductor applications. These small features are achieved since the polymers have high interaction parameters due to high chemical incompatibility between the blocks. The systems are also ideal for nanolithographic patterning due to good etch contrast between the blocks, which most polymers for this application do not have. When using an oxygen etching process, the polylactide block etches quickly while silicon-containing block etches slowly. Compared to polystyrene-block-polydimethylsiloxane, a block copolymer that does exhibit good etch contrast, both blocks have high glass transition temperatures, which enables them to be solid at room temperature.

There are various references that would be useful in understanding the current invention: Formation of a Device Using Block Copolymer Lithography (US patent application 20090305173/ December 10, 2009) [18]; “One-dimensional arrays of block copolymer cylinders and applications thereof” (US 8,101,261/ January 24, 2012) [19]; Vayer, M. et al. (2010) Perpendicular orientation of cylindrical domains upon solvent annealing thin films of polystyrene-b-polylactide, Thin Solid Films 518(14), 3710-3715. [20]; Zalusky, A. S. et al. (2002) Ordered Nanoporous Polymers from Polystyrene–Polylactide Block Copolymers, J. Am. Chem. Soc. 124(43), 12761-12773. [21]; Wang, Y. and Hillmyer, M. A. (2000) Synthesis of Polybutadiene–Polylactide Diblock Copolymers Using Aluminum Alkoxide Macroinitiators. Kinetics and Mechanism, Macromolecules 33(20), 7395-7403. [22]; Jung, Y. S. and Ross, C. A. (2007) Orientation-Controlled Self-Assembled Nanolithography Using a Polystyrene–Polydimethylsiloxane Block Copolymer, Nano Lett. 7(7), 2046-2050.[23]; Ku, S. J.

et al. (2011) Nanoporous hard etch masks using silicon-containing block copolymer thin films, Polymer 52(1), 86-90. [24].

It is desired that the silicon-containing copolymer be used to create “nanostructures” on a surface, or “physical features” with controlled orientation. These physical features have shapes and thicknesses. For example, various structures can be formed by components of a block copolymer, such as vertical lamellae, in-plane cylinders, and vertical cylinders, and may depend on film thickness, surface treatment, and the chemical properties of the blocks. In a preferred embodiment, said cylindrical structures being substantially vertically aligned with respect to the plane of the first film. Orientation of structures in regions or domains at the nanometer level (i.e. “microdomains” or “nanodomains”) may be controlled to be approximately uniform, and the spatial arrangement of these structures may also be controlled. For example, in one embodiment, domain spacing of the nanostructures is approximately 50 nm or less. In another preferred embodiment, said nanostructures are spheres or spherical in shape. The methods described herein can generate structures with the desired size, shape, orientation, and periodicity. Thereafter, in one embodiment, these structures may be etched or otherwise further treated.

ADVANTAGES/SPECIAL CHARACTERISTICS

The present invention provides advantages over current technologies. 1) Small block copolymer feature sizes attainable (High interaction parameter value); 2) Good etch contrast (polylactide etches quickly while silicon-containing block etches slowly in oxygen etch); 3) Simple synthesis process, 4) Both blocks have high glass transition temperatures (solid at room temperature); 5) Good solvent selectivity between blocks of copolymer; and 6) Polylactide material comes from a naturally-derived monomer

It is desired that the block copolymer be used to create “nanostructures” on a surface, or

“physical features” with controlled orientation. These physical features have shapes and thicknesses. For example, various structures can be formed by components of a block copolymer, such as vertical lamellae, in-plane cylinders, and vertical cylinders, and may depend on film thickness, surface treatment, and the chemical properties of the blocks. In a preferred embodiment, said cylindrical structures being substantially vertically aligned with respect to the plane of the first film. Orientation of structures in regions or domains at the nanometer level (i.e. “microdomains” or “nanodomains”) may be controlled to be approximately uniform, and the spatial arrangement of these structures may also be controlled. For example, in one embodiment, domain spacing of the nanostructures is approximately 50 nm or less. In a preferred embodiment, said cylindrical structures are controlled by the deposition of a polymer topcoat and aligned in an annealing process. The methods described herein can generate structures with the desired size, shape, orientation, and periodicity. Thereafter, in one embodiment, these structures may be etched or otherwise further treated.

APPLICATIONS:

Poly(lactide)/silicon-containing block copolymers have potential applications for overcoming feature-size limitations in nanoscale lithographic patterning. The compatibility of block copolymer patterning with current semiconductor processing makes nanoscale lithography with block copolymers a potentially viable solution to this problem.

Synthesis of PTMSS-b-PLA

PTMSS-b-PLA block copolymers were synthesized through a combination of anionic and ring-opening polymerization. PTMSSOH was synthesized by well-established methods for

hydroxyl-functionalizing polystyrene and reacted with triethylaluminum to form an aluminum alkoxide macroinitiator, followed by the ring-opening of lactide. Poly(styrene-b-lactide) (PS-b-PLA) has been synthesized previously using this method. The reaction conditions used in this work were chosen based on previous kinetic studies performed on the ring-opening of lactide. The reaction mechanism for this polymer is shown in Figure 2. Properties of the polymers synthesized in this study are reported in Table 1.

To determine the morphology and feature dimensions of the polymers synthesized in this work, small angle x-ray scattering (SAXS) experiments were performed on bulk samples. The morphologies of the polymers were determined by the proximities of the higher-order peaks to the primary peak (q^*). Domain spacings were defined by the location of q^* and were calculated as $d=2\pi/q^*$. SAXS profiles for the polymers investigated in this study are shown in Figure 4.

Thin film orientation of PTMSS-b-PLA

To examine the thin film self-assembly behavior of the PTMSS-b-PLA block copolymers, polymer films were spin-coated onto silicon wafers with a native oxide layer. The as-cast polymer films are represented by the AFM phase image shown in Figure 5a. After thermally annealing the sample for two hours at 120°C, a temperature above the glass transition temperatures of both blocks of the block copolymer, the cylindrical domains oriented parallel to the substrate as shown in Figure 5b.

Solvent annealing techniques were employed to achieve perpendicular orientation of the cylinder domains. Samples were solvent annealed under a cyclohexane vapor for various times. Figure 6a shows parallel block copolymer orientation after a 2 hour anneal. Figure 6b and Figure 6c show perpendicular orientation after annealing the sample for 4 and 23 hours respectively.

Solvent annealing techniques were also employed to achieve perpendicular orientation of

a lamellae-forming sample. Figure 7a shows the lamellae-forming sample in a thin film as cast and Figure 7b shows the same sample after solvent annealing under a cyclohexane vapor for 4 hours. The fingerprint pattern is representative of a lamellar sample aligned perpendicular to the substrate.

5 PLA removal and etch contrast

After aligning the block copolymer films by solvent annealing, the etch characteristics of the material were investigated. An oxygen etch was used to remove the organic (PLA) domain while leaving the silicon-containing domain. Figure 8 shows AFM height images of the cylinder-forming sample after solvent annealing but before etching and then after etching. In the
10 image before etching, the circular PLA domains are brighter and thus protrude higher out of the sample. After etching, the PLA domains appear darker, meaning they are lower than the PTMSS domain. This indicates the removal of the PLA domain during etching.

The AFM phase images of the cylinder-forming PTMSS-b-PLA undergo a similar transformation as the height images after etching. The phase image is representative of the
15 modulus of the block copolymer domains and undergoes a similar inversion after etching as shown in Figure 9.

Cross-linking the block copolymer before etching increase the material strength to ensure the self-assembled nanostructures are retained in their shape after etching. Removal of material during the etching process can damage nanostructures if they are not mechanically robust.
20 Crosslinking in the block copolymer can make the nano structures more mechanically robust. Incorporating crosslinking functional groups within the polymer structure is only useful when one of the domains of the block copolymer has high resistance against dry etching. This is fairly easy to achieve by incorporation of more than 10% by weight of the element silicon into one of the blocks. In one embodiment such Silicon-Containing Block Co-Polymers are

described in a patent applications entitled "Silicon-Containing Block Co-Polymers, Methods for Synthesis and Use" US 61315235/ March 18, 2010 [25] and PCT/US11/28867, filed March 17, 2011 [26], herein incorporated by reference. Other elements that form refractory oxides can function in a similar fashion. It is not intended that the present invention be limited to a specific silicon-containing monomer or copolymer. Illustrative monomers are shown in Figure 1.

Thus, specific compositions and methods of Polylactide/Silicon-containing Block Copolymers for Nanolithography have been disclosed. It should be apparent, however, to those skilled in the art that many more modifications besides those already described are possible without departing from the inventive concepts herein. The inventive subject matter, therefore, is not to be restricted except in the spirit of the disclosure. Moreover, in interpreting the disclosure, all terms should be interpreted in the broadest possible manner consistent with the context. In particular, the terms "comprises" and "comprising" should be interpreted as referring to elements, components, or steps in a non-exclusive manner, indicating that the referenced elements, components, or steps may be present, or utilized, or combined with other elements, components, or steps that are not expressly referenced.

All publications mentioned herein are incorporated herein by reference to disclose and describe the methods and/or materials in connection with which the publications are cited. The publications discussed herein are provided solely for their disclosure prior to the filing date of the present application. Nothing herein is to be construed as an admission that the present invention is not entitled to antedate such publication by virtue of prior invention. Further, the dates of publication provided may be different from the actual publication dates, which may need to be independently confirmed.

EXPERIMENTAL

Materials

All reagents were used as received unless otherwise noted. Cyclohexane was purified by passing through an activated alumina column and through a supported copper catalyst.

- 5 Trimethylsilyl styrene (TMSS) was synthesized as previously reported and distilled twice over dibutylmagnesium. Ethylene oxide was distilled twice over butylmagnesium chloride. D,L lactide (Alfa Aesar) was purified by recrystallization from ethyl acetate, dried *in vacuo*, and stored in a drybox. Toluene and isopropanol were distilled once over calcium hydride and stored in a drybox. Cyclohexane for solvent annealing was used as received.

EXAMPLE 1**Synthesis of hydroxyl-terminated poly(trimethylsilyl styrene) (PTMSSOH)**

PTMSSOH was synthesized by anionic polymerization via standard Schlenk techniques
5 under Ar atmosphere as previously reported. An appropriate amount of *sec*-butyllithium was
added dropwise to purified cyclohexane under Ar atmosphere and stirred at 40°C for ten
minutes. Several drops of TMSS were added to seed the polymerization and were allowed to
react for fifteen minutes. After this time, the remaining TMSS was added dropwise. The solution
reacted overnight. The polymer was endcapped with a hydroxyl functionality by adding purified
10 ethylene oxide and allowing to react overnight. Degassed methanol was added after this time to
quench the living anions. The polymer was precipitated in methanol and dried *in vacuo*.

EXAMPLE 2

Synthesis of Poly(trimethylsilyl styrene-b-lactide) (PTMSS-b-PLA)

Lactide polymerizations were performed in a drybox using dry toluene. One mole of
5 triethylaluminum (AlEt₃) solution (1.1 M) was added dropwise to PTMSSOH in toluene per one
mole of PTMSSOH to form an aluminum alkoxide macroinitiator. After stirring this solution for
2 hours, D,L lactide was added, the flask was capped, brought out of the drybox, submerged in a
90°C oil bath, and stirred for 6 hours. After this time, the reaction was quenched with 1 mL 1N
HCL and precipitated in a 50:50 methanol:water mixture. The polymer was filtered and dried
10 under vacuum. The PDI of the block copolymer was determined by GPC and the molecular
weight of the PLA block was determined by ¹H NMR. The reaction is shown schematically in
Figure 2.

EXAMPLE 3

15 Synthesis of polylactide (PLA) homopolymer

PLA homopolymer was synthesized using the same procedure as PTMSS-b-PLA,
however dry isopropanol was used as the initiator instead of PTMSSOH macroinitiator, as shown
in Figure 3.

REFERENCES:

1. Ross, C. A. (2001) Patterned Magnetic Recording Media, *Annu. Rev. Mater. Res.* 31(1), 203-238.
2. Yang, X. *et al.* (2008) Toward 1 Tdot/in.² nanoimprint lithography for magnetic
5 bit-patterned media: Opportunities and challenges *J. Vac. Sci. Technol.* 26(6), 2604-2610
3. Ruiz, R. *et al.* (2008) Density Multiplication and Improved Lithography by Directed Block Copolymer Assembly, *Science* 321(5891), 936-939.
4. Bates, F. S. and Fredrickson, G. H. (1990) Block Copolymer Thermodynamics: Theory and Experiment, *Annu. Rev. Phys. Chem.* 41, 525-557.
- 10 5. Li, M. and Ober, C. K. (2006) Block copolymer patterns and templates, *Mater. Today* 9(9), 30-39.
6. Colburn, M. *et al.* (2000) Step and flash imprint lithography for sub-100-nm patterning, *Proc. SPIE-Int. Soc. Opt. Eng.* 3997, 453-457.
7. Kim, H.-C. *et al.* (2001) A Route to Nanoscopic SiO₂ Posts via Block Copolymer
15 Templates, *Adv. Mater.* 13(11), 795-797.
8. Nagarajan, S. *et al.* (2008) An Efficient Route to Mesoporous Silica Films with Perpendicular Nanochannels, *Adv. Mater.* 20(2), 246-251.
9. Lammertink, R. G. H. *et al.* (2000) Nanostructured Thin Films of Organic-Organometallic Block Copolymers: One-Step Lithography with Poly(ferrocenylsilanes) by Reactive Ion
20 Etching, *Adv. Mater.* 12(2), 98-103.
10. Gillham, J. K. (1986) Formation and Properties of Thermosetting and High T_g Polymeric Materials, *Polym. Eng. Sci.* 26(20), 1429-1433.

11. Bates, F. S. and Fredrickson, G. H. (1999) Block Copolymers---Designer Soft Materials, *Phys. Today* 52(2), 32-38.
12. Kim, H.-C., Park, S.-M., and Hinsberg, W. D. (2009) Block Copolymer Based Nanostructures: Materials, Processes, and Applications to Electronics, *Chemical Reviews* 110(1), 146-177.
13. Park, M. *et al.* (1997) Block Copolymer Lithography: Periodic Arrays of ~1011 Holes in 1 Square Centimeter, *Science* 276(5317), 1401-1404.
14. Han, E. *et al.* (2009) Perpendicular Orientation of Domains in Cylinder-Forming Block Copolymer Thick Films by Controlled Interfacial Interactions, *Macromolecules* 42(13), 4896-4901.
15. Ryu, D. Y. *et al.* (2007) Surface Modification with Cross-Linked Random Copolymers: Minimum Effective Thickness, *Macromolecules* 40(12), 4296-4300.
16. Walton, D. G. *et al.* (1994) A Free Energy Model for Confined Diblock Copolymers, *Macromolecules* 27(21), 6225-6228.
17. Bates, C. M. *et al.* (2011) Polymeric Cross-Linked Surface Treatments for Controlling Block Copolymer Orientation in Thin Films, *Langmuir* 27(5), 2000-2006.
18. Xiao, S. and Yang, X. "Formation of a Device Using Block Copolymer Lithography," United States Patent Application 20090305173 Application 12/135387, filed June 9, 2008. (Published December 10, 2009).
19. Millward, D. B. and Stuen, K. "One-dimensional arrays of block copolymer cylinders and applications thereof," United States Patent 8,101,261 Application 12/030562, filed February 13, 2008. (Published January 24, 2012).

20. Vayer, M. *et al.* (2010) Perpendicular orientation of cylindrical domains upon solvent annealing thin films of polystyrene-b-poly lactide, *Thin Solid Films* 518(14), 3710-3715.
21. Zalusky, A. S. *et al.* (2002) Ordered Nanoporous Polymers from Polystyrene–Polylactide Block Copolymers, *J. Am. Chem. Soc.* 124(43), 12761-12773.
- 5 22. Wang, Y. and Hillmyer, M. A. (2000) Synthesis of Polybutadiene–Polylactide Diblock Copolymers Using Aluminum Alkoxide Macroinitiators. Kinetics and Mechanism, *Macromolecules* 33(20), 7395-7403.
23. Jung, Y. S. and Ross, C. A. (2007) Orientation-Controlled Self-Assembled Nanolithography Using a Polystyrene–Polydimethylsiloxane Block Copolymer, *Nano*
10 *Lett.* 7(7), 2046-2050.
24. Ku, S. J. *et al.* (2011) Nanoporous hard etch masks using silicon-containing block copolymer thin films, *Polymer* 52(1), 86-90.
25. Willson, C. G. *et al.* "Silicon-Containing Block Co-Polymers, Methods for Synthesis and Use," United States Patent Application 61/315,235, filed March 18, 2010.
- 15 26. Willson, C. G. *et al.* "Silicon-Containing Block Co-Polymers, Methods for Synthesis and Use," United States Patent Application PCT/US11/28867, filed March 17, 2011.

TABLE 1

Sample	M _n PTMSSOH	PDI PTMSSOH	M _n PLA	PDI PTMSS-PLA	Vol. % PLA	Morphology (SAXS)	d (nm)
PTMSS ₆ -b-PLA _{4.1}	6000	1.13	4100	1.09	36.1	Cylindrical	12.1
PTMSS ₆ -b-PLA _{7.1}	6000	1.13	7100	1.07	49.5	Lamellar	15.3

CLAIMS:

We Claim:

1. A method of synthesizing a silicon and lactide-containing block copolymer, comprising:
 - a. providing first and second monomers, said first monomer comprising a silicon atom and said second monomer being a lactide based monomer lacking silicon that can be polymerized;
 - b. treating said second monomer under conditions such that reactive polymer of said second monomer is formed;
 - c. reacting said first monomer with said reactive polymer of said second monomer under conditions such that said silicon-containing block copolymer is synthesized.; and
 - d. wherein the glass transitions of both blocks are above room temperature.
2. The product of claim 1, wherein at least one of said blocks are cross-linkable
3. The method of claim 1, wherein a third monomer is provided and said block copolymer is a triblock copolymer.
4. The product of claim 1, wherein said block copolymers form nanostructured materials that can be used as etch masks in lithographic patterning processes.

5. The product of claim 4, wherein said block co-polymer comprised of at least one block of a lactide and at least one block of a silicon containing polymer or oligomer with at least 10 wt% silicon.
6. The method of claim 1, wherein said block copolymer is endcapped.
7. The method of claim 6, wherein said block copolymer is endcapped with a functional group.
8. The method of claim 7, wherein said block copolymer is endcapped with a hydroxyl functionality by reacting with ethylene oxide.
9. The method of claim 1, further comprising e) precipitating said silicon-containing block copolymer.
10. The method of claim 9, wherein said silicon-containing block copolymer is precipitated in methanol.
11. The method of claim 1, wherein one of the blocks is polytrimethylsilylstyrene.
12. The method of claim 1, wherein said first monomer is trimethylsilylstyrene.
13. The method of claim 1, wherein said first monomer is a silicon-containing methacrylate.

14. The method of claim 13, wherein said first monomer is methacryloxymethyltrimethylsilane.
15. The method of claim 1, wherein said second monomer is a lactide.
16. The method of claim 1, wherein said second monomer is DL-lactide.
17. The method of claim 1, further comprising the step f) coating a substrate with said block copolymer so as to create a block copolymer film.
18. The method of claim 17, wherein said substrate comprises silicon.
19. The method of claim 18, wherein said substrate is a silicon wafer.
20. The method of claim 17, wherein said substrate is quartz.
21. The method of claim 17, wherein said substrate is glass.
22. The method of claim 17, wherein said substrate is plastic.
23. The method of claim 17, wherein said substrate is a transparent substrate.
24. The method of claim 17, wherein said substrate is a roll-to-roll substrate

25. The method of claim 17, wherein said substrate is coated with a substrate surface energy neutralizing layer with surface energy in between that of two blocks.
26. The method of claim 25, wherein said substrate surface energy neutralizing layer is selected from the group consisting of:
- (a) high T_g polymer, (b) a cross-linked polymer, (c) vapor deposited polymer such as parylene, (d) small molecule derivatives of silylating agents, and (e) polymer brush by end-attaching polymer to substrate.
27. The method of claim 17, further comprising the step g) treating said film under conditions such that nanostructures form.
28. The method of claim 27, wherein said treating comprises annealing.
29. The method of claim 27, wherein said annealing is by exposure to solvent vapors.
30. The method of claim 27, wherein said annealing is by heating.
31. The method of claim 27, wherein said nanostructures are selected from the group consisting of: lamellae, cylinders, vertically aligned cylinders, horizontally aligned cylinders, spheres, gyroids, network structures, and hierarchical nanostructures.
32. The method of claim 27, wherein said nanostructures comprise spherical structures.

33. The method of claim 27, wherein said nanostructures comprise cylindrical structures, said cylindrical structures being substantially vertically aligned with respect to the plane of the surface.
34. The method of claim 27, wherein said treating comprises exposing said coated surface to a saturated atmosphere of acetone, THF, cyclohexane, or other vaporizing agent or combinations thereof.
35. The method of claim 17, wherein said surface is on a silicon wafer.
36. The method of claim 17, wherein said surface is glass.
37. The method of claim 17, wherein said surface is quartz.
38. The method of claim 17, wherein said substrate is not pre-treated with a surface energy neutralizing layer prior to step e).
39. The method of claim 17, wherein said substrate is pre-treated with a surface energy neutralizing layer prior to step e).
40. The method of claim 1, wherein a third monomer is provided and said block copolymer is a triblock copolymer.
41. The film made according to the process of claim 27.

42. A method of forming nanostructures on a surface, comprising:
- a. providing a silicon and lactide-containing block copolymer and a surface;
 - b. spin coating said block copolymer on said surface to create a coated surface; and
 - c. treating said coated surface under conditions such that nanostructures are formed on said surface.
43. The method of claim 42, wherein said nanostructures comprises cylindrical structures, said cylindrical structures being substantially vertically aligned with respect to the plane of the surface.
44. The method of claim 42, wherein said treating comprises exposing said coated surface to a saturated atmosphere of acetone or THF.
45. The method of claim 42, wherein said surface is on a silicon wafer.
46. The method of claim 42, wherein said surface is glass.
47. The method of claim 42, wherein said surface is quartz.
48. The method of claim 42, wherein said surface is not pre-treated with a substrate neutralization layer prior to step b).

49. The method of claim 42, wherein said surface is pre-treated with a cross-linked polymer prior to step b).

50. The film made according to the process of claim 42.

51. The method of claim 42, further comprising the step e) etching said nanostructure-containing coated surface.