




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : E05B 65/10, E05C 9/06, E05B 59/00, E05C 9/20		A2	(11) International Publication Number: WO 99/61734
			(43) International Publication Date: 2 December 1999 (02.12.99)
(21) International Application Number: PCT/IL99/00276		(81) Designated States: AE, AL, AM, AT, AT (Utility model), AU, AZ, BA, BB, BG (Utility model), BR, BY, CA, CH, CN, CU, CZ, CZ (Utility model), DE, DE (Utility model), DK, DK (Utility model), EE, EE (Utility model), ES, FI, FI (Utility model), GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS (Utility model), LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT (Utility model), RO, RU, SD, SE, SG, SI, SK, SK (Utility model), SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).	
(22) International Filing Date: 24 May 1999 (24.05.99)			
(30) Priority Data: 124637 25 May 1998 (25.05.98) IL			
(71) Applicant (for all designated States except US): MUL-T-LOCK SECURITY PRODUCTS LTD. [IL/IL]; Mul-T-Lock Park, P.O. Box 465, 81104 Yavne (IL).			
(72) Inventors; and (75) Inventors/Applicants (for US only): RODKIN, Eli [IL/IL]; Jerusalem Street 68/14, 75324 Rishon le Zion (IL). NICOARA, Peter [IL/IL]; HaAtzmaut Street 91/37, 77245 Ashdod (IL).			
(74) Agents: COLB, Sanford, T. et al.; Sanford T. Colb & Co., P.O. Box 2273, 76122 Rehovot (IL).		Published Without international search report and to be republished upon receipt of that report.	

(54) Title: MORTISE LOCK

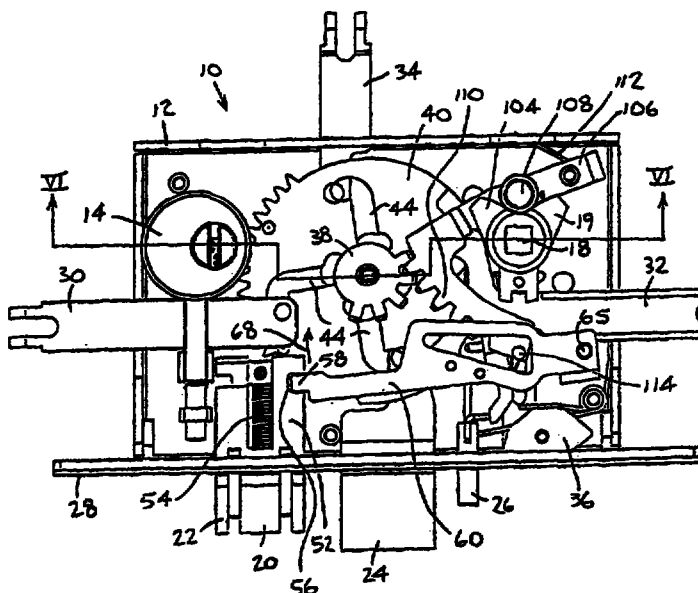

(57) Abstract

A mortise lock (10) including a mortise lock case (12) which houses a locking mechanism actuable by a key-operated lock cylinder (14), and separately by a handle (16) which engages a bolt follower (19) in operative connection with the locking mechanism, characterized in that the mortise lock (10) comprises a plurality of locking bolts (20, 22, 24, 26, 30, 32, 34) which are arranged to protrude outwards from the case (12), and wherein the handle (16) is operatively linked to the plurality of locking bolts (20, 22, 24, 26, 30, 32, 34) by a linkage wherein the plurality of locking bolts (20, 22, 24, 26, 30, 32, 34) are actuable into an unlocked position by suitable rotation of the handle (16) independently of whether or not the mortise lock (10) is locked by the key-operated cylinder.