

**MICROPHONE/LOUDSPEAKERS AND SYSTEMS  
USING MULTIPLE MICROPHONE/LOUDSPEAKERS**

**FIELD OF THE INVENTION**

This invention relates to microphone/loudspeakers  
5 (M/Ls) and systems which use M/Ls, and particularly to  
systems which use multiple M/L arrangements in large  
conference rooms and are connected to telephone lines so  
that attendees in the conference room can communicate with  
each other and through telephone lines.

10 **BACKGROUND OF THE INVENTION**

Large conference rooms require multiple micro-  
phone/loudspeakers to provide satisfactory coverage of the  
room. To communicate with outsiders through telephone  
lines, outgoing microphone and incoming loudspeaker signals  
15 must pass through a speakerphone which makes the correct  
transmit/receive (tx/rx) state selection to the telephone  
service. Presently, M/Ls under the name Quorum Stalks have  
been used in tandem with each other and with speakerphones  
to achieve these ends. However, such systems are  
20 cumbersome.

**SUMMARY OF THE INVENTION**

According to a feature of the invention a micro-  
phone/loudspeaker includes a microphone arrangement, a  
loudspeaker arrangement, and means to operate as an M/L in  
25 the quiescent mode and to shift to a speakerphone mode in  
response to a battery voltage on a telephone line. In the  
quiescent mode the microphone arrangement and the  
loudspeaker arrangement operate substantially independent of  
each other while in the speakerphone mode they interact on  
30 the basis of signal strengths from the microphone and the  
telephone line.

According to another feature of the invention, the  
M/L includes means to connect to other M/Ls so that the

microphone arrangement of one M/L couples in tandem to the microphone arrangements of other M/Ls, and the loudspeaker arrangement of the M/L couples in tandem to loudspeaker arrangements of other M/Ls.

- 5           These and other features of the invention are pointed out in the claims. Other objects of the invention will become evident from the following detailed description when read in light of the accompanying drawings.

#### **BRIEF DESCRIPTION OF THE DRAWINGS**

- 10           Fig. 1 is a block diagram of a system embodying features of the invention.

Fig. 2 is a schematic diagram of a switching arrangement for use in the system of Fig. 1.

#### **DETAILED DESCRIPTION OF PREFERRED EMBODIMENTS**

- 15           Fig. 1 illustrates three identical microphone/loudspeakers ML1, ML2, and ML3 arranged in tandem. For this purpose jacks JA11, JA12, and JA13 on microphone/loudspeaker ML1 are coupled to plugs PL21, PL22, and PL23 on microphone/loudspeaker ML2, and jacks JA21, JA22, and JA23 on microphone/loudspeaker ML2 are coupled to plugs PL31, PL32, and PL33 on microphone/loudspeaker ML3. Each microphone/loudspeaker includes structure to permit operation in a speakerphone mode and may thus be regarded as a speakerphone as well as an M/L. Each M/L is adapted to respond
- 25           automatically to its position in the tandem arrangement and assume either a speakerphone operation or, as appropriate, a microphone/ loudspeaker operation. Specifically, when the first microphone/loudspeaker ML1, when it is off-hook and thus connects to a live telephone line T/R of a telephone
- 30           service carrying a battery voltage and signals (audio) from a central office, performs a speakerphone operation. The microphone/loudspeakers ML2 and ML3, which cannot connect directly to the telephone line, each perform a microphone/-



loudspeaker operation.

Microphone/loudspeakers ML1, ML2, and ML3 include respective manually-operated hook switches S11, S21, and S31 which are normally in the on-hook positions. In Fig. 1 the hook switches S11, S21, and S31 all appear in the off-hook positions.

In the microphone/loudspeaker ML1, a conventional speakerphone hybrid HI1 connect to the telephone line T/R through the hook switch S11. When the hook switch S11 is in the off-hook position shown, the hybrid HI1 splits the telephone line T/R so that incoming audio signals pass to a loudspeaker LO1 and so that signals from a microphone MI1 pass to the telephone line. Similarly, in the microphone/-loudspeakers ML2, speakerphone hybrids HI2 and HI3, when operational, split the telephone line (if connected) so that incoming audio signals at switches S21 and S31 pass to loudspeakers LO2 and LO3 and so that outgoing signals from microphones MI2 and MI3 pass to the respective switches S21 and S31. The hybrids H1, H2, and H3 connect to conventional speakerphone "varioloosers" or loss controls LC1, LC2, and LC3. When connected to the loudspeakers and signals coming from the microphones, the loss controls LC1, LC2, and LC3 each select the stronger of the microphone or received telephone line signals in each microphone/loudspeaker and place loss in the path of the weaker signal. In that way only the stronger signal passes in each microphone/loudspeaker. This is standard for present speakerphones and telephone sets. An example of a loss control LC1, LC2, or LC3 is a chip identified as a Motorola MC34118. Each hybrid and loss control in each microphone/loudspeaker constitute the structure that permits operation of the M/L in the speakerphone mode. Together the hybrid and loss control in any of the M/Ls are referred to as a phone control.

Separate, so called, "voting circuits" or "voting




units" VO1, VO2, and VO3 lie in the path between the loss controls LC1, LC2, and LC3 and the microphones MI1, MI2, MI3. The voting circuit VO2 selects either the signal of the microphone MI2 or the signal of the voting circuit VO3 based on comparative signal strengths. Voting circuit VO1 selects either the signal from the microphone MI1 or the signal selected by the voting circuit VO2 based on signal strength. Voting circuit VO3 inherently selects microphone MI3 because it senses no signal at the jack JA31. Voting circuits of this type are part of the CS120A Quorum microphone/loudspeakers available from AT&T. Their operation with microphone/loudspeakers is well known.

Selector switches S12, S22, and S23 at the loudspeaker LO1, LO2, LO3 of microphone/loudspeakers ML1, ML2, ML3 respond to actuation by detectors DE1, DE2, and DE3 and assume unactuated positions (down) which connect them to plugs PL13, PL23, and PL33. Jacks JA13 and JA23 then connect the loudspeakers LO1, LO2, and LO3 to each other when the switches S22 and S32 remain unactuated. In the actuated (up) condition the switches S12, S22, and S32 connect the loudspeakers LO1, LO2, and LO3 to the loudspeaker output of the loss controls LC1, LC2, and LC3.

The detectors DE1, DE2, and DE3 actuate the respective switches S12, S22, and S23 in response to battery voltages on the telephone line at the input to the respective hybrids HI1, HI2, and HI3.

Because the switches S12, S22, and S23 disconnect the loudspeaker LO1, LO2, and LO3 from the loudspeaker outputs of the loss controls LC1, LC2, and LC3 in the unactuated condition, the microphone/loudspeakers ML1, ML2, and ML3 normally (in the unactuated condition of the switches) operate microphone/loudspeaker mode. When any one of detectors DE1, DE2, or DE3 detects a battery voltage on the telephone line T/R, the respective switch S12, S22, or S23 switches (up) to connect the corresponding loudspeaker



to the loss control LC1, LC2, or LC3. This places the M/L in the speakerphone mode. In the tandemed arrangement shown, only detector DE1 in microphone/loudspeaker ML1 can respond to a battery voltage on telephone line T/R because it is the only detector that can connect to the line T/R. Hence, only the microphone/loudspeaker ML1 can operate in the speakerphone mode. Microphone/loudspeakers ML2 and ML3, by virtue of their tandemed conditions, operate in the microphone/loudspeaker mode.

10 According to an embodiment of the invention, the detector DE1, DE2, and DE3 are each in the form of a relay coil magnetically coupled to the respective switches S12, S22, and S23. When the relay coils detect no battery voltage from the telephone line T/R, they are unenergized, i.e. the switches S12, S22, and S32 assume the down position connected to plugs PL13, PL23, and PL33. When any one of the relay coils is energized by battery voltage on the telephone line T/R it energizes and lifts the corresponding switch into contact with the loudspeaker connection of the corresponding loss control LC1, LC2, or LC3. An example of a detector DE1 used with the switch S12 appears in Fig. 2. Here, when the relay coil RE1 detects no battery voltage from the telephone line T/R, i.e. it is unenergized, the switch S12 assumes the down position connected to plug PL13. 20 When the relay coil RE1 is energized by battery voltage on the telephone line T/R it lifts the corresponding switch into contact with the loudspeaker connection of the loss control LC1.

30 According to another embodiment of the invention, the detectors DE1, DE2, and DE3 and the switches S12, S22, and S32 are in the form of solid state devices such as transistors, field effect transistors (FETs), MOSFETs, opto-isolators, etc. The solid state devices of the detectors cause conduction of transistors representing a state of a corresponding switch S12, S23, or S33. A full wave 35



rectifier bridge in the detectors makes sure that the solid state devices receive the proper polarity of current.

According to yet another embodiment of the invention, the detectors DE1, DE2, and DE3 are parts of  
5 respective chips each of whose logic controls connection of the corresponding loudspeaker, LO1, LO2, or LO3 to the loss control or plug PL13, PL23, or PL33. Respective chips may have other parts such as the hybrids HI1, HI2, and HI3, and the loss control LC1, LC2, and LC3.

10 According to an embodiment of the invention the hook switches S11, S21, and S31 operate together with switches (not shown) that turn the M/Ls on and off electrically. In the on-hook positions the M/Ls are off, and in the off-hook positions they are on.

15 In operation the three off-hook microphone/loudspeakers ML1, ML2, and ML3 are first connected in tandem by connecting the plugs PL21, PL22, PL23 and PL31, PL32, PL33 to the respective jacks JA11, JA12, JA13 and JA21, JA22, JA23. Plugs PL11, PL13, and jacks JA31, JA32, and JA33  
20 remain unconnected. Additional or fewer microphone/loudspeakers may be connected in tandem. When the microphone/loudspeakers ML1, ML2, and ML3 are on-hook the detectors DE1, DE2, and DE3 remain unactuated and the switches S12, S23, and S33 remain in the down position in connection with  
25 the respective plugs PL13, PL23, and PL33. In this condition the microphone/loudspeakers ML1, ML2, and ML3 are in the microphone/loudspeakers operating mode.

The left-most microphone/loudspeaker ML1 is now connected to the telephone line T/R from a telephone central  
30 office, and placed off-hook by switching the switch S11 to the left. The other switches S21 and S31 are also set off-hook but their connections through plug PL22 and jack JA12 prevents their connection to the line T/R. Only the switch S11 can produce physical connection to the line T/R.

35 Connection of the switch S11 to the line T/R

causes response by the detector DE1. The latter lifts the switch S12 to connect the loudspeaker line of the loss control LC1 to the loudspeaker L01. This places the microphone/loudspeaker ML1 in the speakerphone mode. However, it  
5 leaves the microphone/loudspeakers ML2 and ML3 in the microphone/loudspeaker mode, because no T/R voltage from the line T/R can actuate the detectors DE2 and DE3. As a whole this results in a microphone/loudspeaker ML1 connected to the line T/R and two loudspeaker-microphones all connected in  
10 tandem.

All the loudspeakers L01, L02, and L03 now receive audio signals from the loudspeaker output of the loss control LC1 in the only microphone/loudspeaker ML1 operating in the speakerphone mode. The microphones and loudspeakers  
15 all include amplifiers (not shown) as needed.

The microphone MI3 is connected to the voting unit VO2 of the microphone MI2. The voting unit VO2 selects either its own microphone (MI2) signal or the one from microphone MI3 based on signal strength. The voting unit  
20 VO1 selects the signal from the microphone MI1 or the selected signal from microphones MI2 and MI3 based on signal strength. Based on the selected microphone signal and the received signal on the line T/R, the loss control performs the appropriate speakerphone lossing operation.

25 According to one embodiment of the invention, the microphones are single microphone units. In another embodiment of the invention, the microphones MI1, MI2, and MI3 are each in the form of a set of plural microphone units aimed outwardly in distributed radial directions to achieve  
30 omnidirectional sensitivity. For each set, selection circuits choose the radially directed microphone units subjected to the maximum input for operation for any moment while suppressing others at that time.

The term hook switch as used herein is often  
35 referred to as switchhook.

While embodiments of the invention have been described in detail, it will be evident by those skilled in the art that the invention may be embodied otherwise without departing from its spirit and scope.




THIS SHEET HAS BEEN  
REPLACED

- 9 -

CLAIMS:

1. A microphone/loudspeaker, comprising:  
a microphone arrangement;  
a loudspeaker arrangement;  
5 a phone control responsive to a telephone line and  
coupled to said microphone arrangement; and  
a telephone voltage responsive multi-state  
selection arrangement;  
said loudspeaker arrangement being decoupled from  
10 said phone control in the one state of said selection  
arrangement, and coupled to said phone control in another  
state of said selection arrangement.
2. A microphone/loudspeaker as in claim 1,  
wherein said microphone arrangement includes a microphone,  
15 a voting circuit, and a connector arrangement to voting  
circuits in other microphone/loudspeakers.
3. A microphone/loudspeaker as in claim 1,  
wherein said microphone/loudspeaker further comprises a hook  
switch connected to said phone control.
- 20 4. A microphone/loudspeaker as in claim 1,  
wherein said loudspeaker arrangement includes means for  
connecting said loudspeaker to other loudspeakers.
5. A microphone/loudspeaker as in claim 1,  
wherein said loudspeaker means includes first means for  
25 connecting said loudspeaker to other loudspeakers and said  
selection arrangement includes second means for connecting  
said loudspeaker to still other loudspeakers.
6. A microphone/loudspeaker as in claim 1,  
wherein said microphone arrangement includes a microphone,  
30 a voting circuit, and means for connecting said voting

This Sheet Has Been Replaced





THIS SHEET HAS BEEN  
REPLACED

- 10 -

circuit to voting circuits in other microphone/loudspeakers,  
said microphone/loudspeaker further comprises a hook switch  
connected to said phone control, said loudspeaker  
arrangement includes first means for connecting said  
5 loudspeaker to other loudspeakers and said conversion means  
includes second means for connecting said loudspeaker to  
other loudspeakers.

7. A system, comprising:

a plurality of microphone/loudspeakers;

10 means in each of said microphone/loudspeakers for  
placing said microphone/loudspeakers in a microphone/loud-  
speaker mode, when quiescent, and into a speakerphone mode  
in response to voltages indicating that the microphone/loud-  
speaker has been placed in an off-hook condition and is  
15 connected to an active telephone line, and

means for connecting said microphone/loudspeakers  
in tandem and connecting only one of said microphone/loud-  
speakers to a telephone line.

8. A system as in claim 7, wherein said micro-  
20 phone/loudspeakers each includes a microphone arrangement  
and a loudspeaker arrangement, and wherein said means for  
connecting connects said loudspeaker arrangement of each  
microphone/loudspeaker to a loudspeaker arrangement in  
another of said microphone/loudspeakers, and said microphone  
25 arrangement of one microphone/loudspeaker connects to a  
microphone arrangement of another microphone/loudspeaker.

9. A system as in claim 7, wherein said micro-  
phone/loudspeakers each includes:

a microphone arrangement;

This Sheet Has Been Replaced





THIS SHEET HAS BEEN  
REPLACED

- 11 -

a loudspeaker arrangement;  
a phone control coupled to said microphone arrangement and responsive to the telephone line.

10. A system as in claim 7, wherein said microphone/loudspeakers each includes:

a microphone arrangement;  
a loudspeaker arrangement;  
a phone control for coupling to a telephone line and coupled to said microphone arrangement; and  
10 a telephone voltage responsive multi-state selection arrangement;

said loudspeaker arrangement being decoupled from said phone control in the one state of said selection arrangement, and coupled to said phone control in another  
15 state of said selection arrangement.

11. A system as in claim 10, wherein in each of said microphone/loudspeakers said microphone arrangement includes a microphone, a voting circuit, and means for connecting said voting circuit to voting circuits in other  
20 microphone/loudspeakers.

12. A system as in claim 10, wherein in each of said microphone/loudspeakers a hook switch is connected to said phone control.

13. A system as in claim 10, wherein in each of  
25 said microphone/loudspeakers wherein said loudspeaker arrangement includes a loudspeaker and means for connecting said loudspeaker to other loudspeakers.

14. A system as in claim 10, wherein in each of said microphone/loudspeakers said loudspeaker arrangement  
30 includes a loudspeaker and first means for connecting said

This Sheet Has Been Replaced





THIS SHEET HAS BEEN  
REPLACED

- 12 -

loudspeaker to other loudspeakers and said conversion means includes second means for connecting said loudspeaker to still other loudspeakers.

15        15. A system as in claim 10, wherein in each of said microphone/loudspeakers said microphone arrangement includes a microphone, a voting circuit, and means for connecting said voting circuit to voting circuits in other microphone/loudspeakers, said microphone/loudspeaker further comprises a hook switch connected to said phone control.

10                16. A system as in claim 10, wherein in each of said microphone/loudspeakers said loudspeaker arrangement includes first means for connecting said loudspeaker to other loudspeakers and said conversion means includes second means for connecting said loudspeaker to still other  
15 loudspeakers, said microphone arrangement includes a microphone, a voting circuit, and means for connecting said voting circuit to voting circuits in other microphone/loudspeakers, said microphone/loudspeaker further comprises a hook switch connected to said phone control.

20                17. An apparatus, comprising:  
microphone means for receiving sound;  
loudspeaker means for transmitting sound; and means for placing said loudspeaker means in speakerphone relationship to said microphone means in response to a telephone line  
25 voltage and for removing said loudspeaker means from the speakerphone relationship in the absence of the telephone line battery voltage.

This Sheet Has Been Replaced



- 13 -

**MICROPHONE/LOUDSPEAKERS AND SYSTEMS  
USING MULTIPLE MICROPHONE/LOUDSPEAKERS**


- Microphone/loudspeakers (ML1,ML2,ML3) include a microphone arrangement (M11,M12,M13) and a loudspeaker (LO1,LO2,LO3) and means
- 5 (LC1,HI1,DE1) to operate as microphone/loudspeakers in the quiescent mode and to shift to a speakerphone mode in response to a battery voltage from a telephone line (T/R). In the quiescent mode the microphone arrangement and the loudspeaker operate substantially independent of each other while in the speakerphone mode they interact on the basis of their respective signal strengths. In a system, the
- 10 microphone/loudspeakers connect to other microphone/loudspeakers (via JA11, PL21; JA21, PL31; JA13, PL23: JA23, PL33) so that the microphone arrangement of one microphone/loudspeaker couples in tandem to the microphone arrangement of other microphone/loudspeakers, and the loudspeaker of one microphone/loudspeaker couples in tandem to loudspeaker of other microphone/loudspeakers.

15

This Sheet Has Been Replaced



FIG. 1

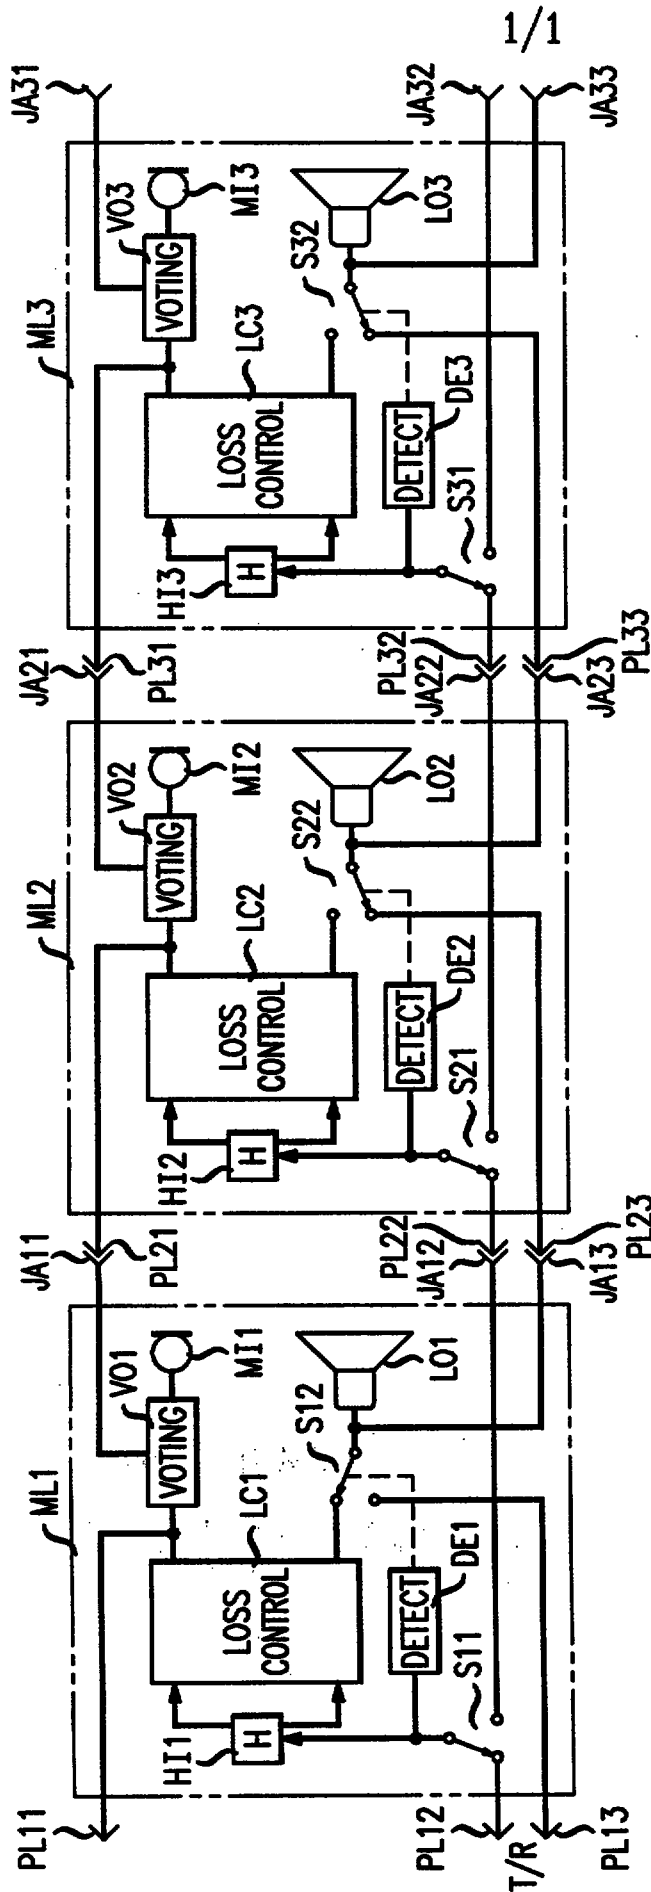

This Sheet Has Been Replaced

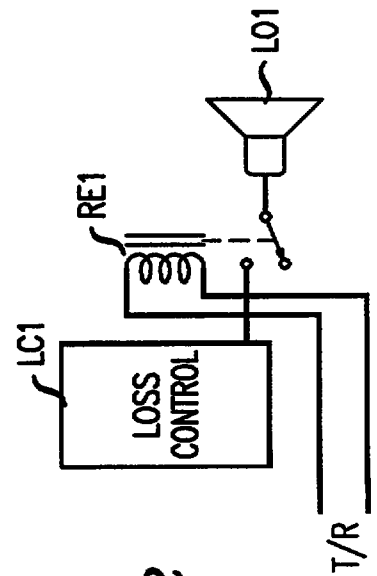


FIG. 2

## **MICROPHONE/LOUDSPEAKERS AND SYSTEMS USING MULTIPLE MICROPHONE/LOUDSPEAKERS**

Microphone/loudspeakers (ML1,ML2,ML3) include a microphone arrangement (M11,M12,M13) and a loudspeaker (LO1,LO2,LO3) and means (LC1,HI1,DE1) to operate as microphone/loudspeakers in the quiescent mode and to shift to a speakerphone mode in response to a battery voltage from a telephone line (T/R). In the quiescent mode the microphone arrangement and the loudspeaker operate substantially independent of each other while in the speakerphone mode they interact on the basis of their respective signal strengths. In a system, the microphone/loudspeakers connect to other microphone/loudspeakers (via JA11, PL21; JA21, PL31; JA13, PL23; JA23, PL33) so that the microphone arrangement of one microphone/loudspeaker couples in tandem to the microphone arrangement of other microphone/loudspeakers, and the loudspeaker of one microphone/loudspeaker couples in tandem to loudspeaker of other microphone/loudspeakers.

Figure 1

- 3 -

loudspeaker operation.

Microphone/loudspeakers ML1, ML2, and ML3 include respective manually-operated hook switches S11, S21, and S31 which are normally in the on-hook positions. In Fig. 1 the hook switches S11, S21, and S31 all appear in the off-hook positions.

In the microphone/loudspeaker ML1, a conventional speakerphone hybrid HI1 connect to the telephone line T/R through the hook switch S11. When the hook switch S11 is in the off-hook position shown, the hybrid HI1 splits the telephone line T/R so that incoming audio signals pass to a loudspeaker LO1 and so that signals from a microphone MI1 pass to the telephone line. Similarly, in the microphone/loudspeakers ML2 and ML3 speakerphone hybrids HI2 and HI3, when operational, split the telephone line (if connected) so that incoming audio signals at switches S21 and S31 pass to loudspeakers LO2 and LO3 and so that outgoing signals from microphones MI2 and MI3 pass to the respective switches S21 and S31. The hybrids HI1, HI2, and HI3 connect to conventional speakerphone "varioloosers" or loss controls LC1, LC2, and LC3. When connected to the loudspeakers and signals coming from the microphone, the loss controls LC1, LC2, and LC3 each select the stronger of the microphone or received telephone line signals in each microphone/loudspeaker and place loss in the path of the weaker signal. In that way only the stronger signal passes in each microphone/loudspeaker. This is standard for present speakerphones and telephone sets. An example of a loss control LC1, LC2, or LC3 is a chip identified as a Motorola MC34118. Each hybrid and loss control in each microphone/loudspeaker constitute the structure that permits operation of the M/L in the speakerphone mode. Together the hybrid and loss control in any of the M/Ls are referred to as a phone control.

Separate, so called, "voting circuits" or "voting

REPLACEMENT SHEET

Date : 27 AUG 1996

- 4 -

units" VO1, VO2, and VO3 lie in the path between the loss controls LC1, LC2, and LC3 and the microphones MI1, MI2, MI3. The voting circuit VO2 selects either the signal of the microphone MI2 or the signal of the voting circuit VO3 based on comparative signal strengths. Voting circuit VO1 selects either the signal from the microphone MI1 or the signal selected by the voting circuit VO2 based on signal strength. Voting circuit VO3 inherently selects microphone MI3 because it senses no signal at the jack JA31. Voting circuits of this type are part of the CS120A Quorum microphone/loudspeakers available from AT&T. Their operation with microphone/loudspeakers is well known.

Selector switches S12, S22, and S32 at the loudspeaker LO1, LO2, LO3 of microphone/loudspeakers ML1, ML2, ML3 respond to actuation by detectors DE1, DE2, and DE3 and assume unactuated positions (down) which connect them to plugs PL13, PL23, and PL33. Jacks JA13 and JA23 then connect the loudspeakers LO1, LO2, and LO3 to each other when the switches S22 and S32 remain unactuated. In the actuated (up) condition the switches S12, S22, and S32 connect the loudspeakers LO1, LO2, and LO3 to the loudspeaker output of the loss controls LC1, LC2, and LC3. The detectors DE1, DE2 and DE3 actuate the respective switches S12, S22, and S32 in response to battery voltages on the telephone line at the input to the respective hybrids HI1, HI2, and HI3.

Because the switches S12, S22, and S23 disconnect the loudspeaker LO1, LO2, and LO3 from the loudspeaker outputs of the loss controls LC1, LC2, and LC3 in the unactuated condition, the microphone/loudspeakers ML1, ML2, and ML3 normally (in the unactuated condition of the switches) operate microphone/loudspeaker mode. When any one of detectors DE1, DE2, or DE3 detects a battery voltage on the telephone line T/R, the respective switch S12, S22, or S32 switches (up) to connect the corresponding loudspeaker

REPLACEMENT SHEET


Date : 27 AUG 1996

- 5 -

to the loss control LC1, LC2, or LC3. This places the M/L in the speakerphone mode. In the tandemed arrangement shown, only detector DE1 in microphone/loudspeaker ML1 can respond to a battery voltage on telephone line T/R because it is the only detector that can connect to the line T/R. Hence, only the microphone/loudspeaker ML1 can operate in the speakerphone mode. Microphone/loudspeakers ML2 and ML3, by virtue of their tandemed conditions, operate in the microphone/loudspeaker mode.

According to an embodiment of the invention, the detector DE1, DE2, and DE3 are each in the form of a relay coil magnetically coupled to the respective switches S12, S22, and S32. When the relay coils detect no battery voltage from the telephone line T/R, they are unenergized, i.e. the switches S12, S22, and S32 assume the down position connected to plug PL13, PL23, and PL33. When any one of the relay coils is energized by battery voltage on the telephone line T/R it energizes and lifts the corresponding switch into contact with the loudspeaker connection of the corresponding loss control LC1, LC2, or LC3. An example of a detector DE1 used with the switch S12 appears in Fig. 2. Here, when the relay coil RE1 detects no battery voltage from the telephone line T/R, i.e. it is unenergized, the switch S12 assumes the down position connected to plug PL13. When the relay coil RE1 is energized by battery voltage on the telephone line T/R it lifts the corresponding switch into contact with the loudspeaker connection of the loss control LC1.

According to another embodiment of the invention, the detectors DE1, DE2, and DE3 and the switches S12, S22, and S32 are in the form of solid state devices such as transistors, field effect transistors (FETs), MOSFETs, optoisolators, etc. The solid state devices of the detectors cause conduction of transistors representing a state of a corresponding switch S12, S23, or S32. A full wave



- 6 -

rectifier bridge in the detectors makes sure that the solid state devices receive the proper polarity of current.

According to yet another embodiment of the invention, the detectors DE1, DE2, and DE3 are parts of respective chips each of whose logic controls connection of the corresponding loudspeaker LO1, LO2, or LO3 to the loss control or plug PL13, PL23, or PL33. Respective chips may have other parts such as the hybrids HI1, HI2, and HI3, and the loss control LC1, LC2, and LC3.

According to an embodiment of the invention the hook switches S11, S21, and S31 operate together with switches (not shown) that turn the M/Ls on and off electrically. In the on-hook positions the M/Ls are off, and in the off-hook positions they are on.

In operation the three off-hook microphone/loudspeakers ML1, ML2, and ML3 are first connected in tandem by connecting the plug PL21, PL22, PL23 and PL31, PL32, PL33 to the respective jacks JA11, JA12, JA13, and JA21, JA22, JA23. Plugs PL11, PL13, and jacks JA31, JA32, and JA33 remain unconnected. Additional or fewer microphone/loudspeakers may be connected in tandem. When the microphone/loudspeakers ML1, ML2, and ML3 are on-hook the detectors DE1, DE2, and DE3 remain unactuated and the switches S12, S23, and S32 remain in the down position in connection with the respective plugs PL13, PL23, and PL33. In this condition the microphone/loudspeakers ML1, ML2, and ML3 are in the microphone/loudspeakers operating mode.

The left-most microphone/loudspeaker ML1 is now connected to the telephone line T/R from a telephone central office, and placed off-hook by switching the switch S11 to the left. The other switches S21 and S31 are also set off-hook but their connections through plug PL22 and jack JA12 prevents their connection to the line T/R. Only the switch S11 can produce physical connection to the line T/R.

Connection of the switch S11 to the line T/R

|                   |
|-------------------|
| REPLACEMENT SHEET |
| Date 27 AUG 1996  |

Claims

1. A microphone/loudspeaker to be coupled to a telephone line and to a plurality of other microphone/loudspeakers, and to operate either in a microphone/loudspeaker mode in which it is disconnected from the telephone line and a speakerphone mode in which it is connected to a telephone line, comprising:

a microphone arrangement;

a loudspeaker arrangement;

a phone control responsive to the telephone line when the microphone/loudspeaker is connected to the telephone line and in speakerphone mode and coupled to said microphone arrangement; and

a selection arrangement responsive to a voltage at the telephone line when the microphone/loudspeaker is connected to the telephone line and assuming a first state and second state;

said loudspeaker arrangement being decoupled from said phone control in the first state of said selection arrangement so as to place the microphone/loudspeaker in the microphone/loudspeaker mode, and coupled to said phone control in the second state of said selection arrangement so as to place the microphone/loudspeaker in the speakerphone mode.

2. A microphone/loudspeaker as in claim 1, wherein said microphone arrangement includes a microphone, a voting circuit responsive to signals from the microphone and to signals from the plurality of microphone/loudspeakers.

3. A microphone/loudspeaker as in claim 1, wherein said microphone/loudspeaker further comprises a hook switch connected to said phone control.

REPLACEMENT SHEET

Date : 27 AUG 1996



4. A microphone/loudspeaker as in claim 1, wherein the plurality of microphone/loudspeakers each includes an internal loudspeaker arrangement, said loudspeaker arrangement includes means for connecting  
5 said loudspeaker to the internal loudspeakers of the plurality of microphone/loudspeakers.

5. A microphone/loudspeaker as in claim 1, wherein the plurality of microphone/loudspeakers each includes an internal loudspeaker, and wherein said  
10 selection arrangement includes switch means having a first position for connecting said loudspeaker to one of said internal loudspeakers in the microphone/-  
loudspeaker mode and for connecting said loudspeaker to other internal loudspeakers of the plurality of  
15 microphone/loudspeakers in the speakerphone mode.

6. A microphone/loudspeaker as in claim 1, wherein said microphone arrangement includes a microphone, a voting circuit responsive to signals from the microphone and to signals from the other  
20 microphone/loudspeakers, and means for connecting said voting circuit to voting circuits in other microphone/-  
loudspeakers, said microphone/loudspeaker further comprises a hook switch connected to said phone control, said the plurality of microphone/loudspeakers  
25 includes internal loudspeakers, said selection arrangement includes switch means having a first position for connecting said loudspeaker to one of said internal loudspeakers in the microphone/loudspeaker  
mode and for connecting said loudspeaker to other  
30 internal loudspeakers of the plurality of microphone/-  
loudspeakers in the speakerphone mode.

REPLACEMENT SHEET

Date : 27 AUG 1996



7. A system, comprising:

a plurality of microphone/loudspeakers;

means in each of said microphone/loudspeakers  
for placing said microphone/loudspeakers in a  
5 microphone/loudspeaker mode in an on-hook condition,  
and into a speakerphone mode in response to voltages  
indicating that the microphone/loudspeaker has been  
placed in an off-hook condition and is connected to an  
active telephone line, and

10 means for connecting said microphone/-  
loudspeakers in tandem to each other and connecting  
only one of said microphone/loudspeakers into a  
speakerphone mode in response to voltages indicating  
that the microphone/loudspeaker has been placed in an  
15 off-hook condition and is connected to an active  
telephone line.

8. A system as in claim 7, wherein said  
microphone/loudspeakers each includes a microphone  
arrangement and a loudspeaker arrangement, and wherein  
20 said means for connecting connects said loudspeaker  
arrangement of each microphone/loudspeaker to a  
loudspeaker arrangement in another of said microphone/-  
loudspeakers, and said microphone arrangement of one  
microphone/loudspeaker connects to a microphone  
25 arrangement of another microphone/loudspeaker.

9. A system as in claim 7, wherein said  
microphone/loudspeakers each includes:

a microphone arrangement connected to a  
microphone arrangement in another of the plurality of  
30 microphone/loudspeakers;

a loudspeaker arrangement connected to a  
loudspeaker arrangement in another of the plurality of

REPLACEMENT SHEET

Date : 27 AUG 1996



microphone/loudspeakers;

5 a phone control coupled to said microphone arrangement and responsive to the telephone line and coupled to said loudspeaker in the speakerphone mode and decoupled from said loudspeaker in the microphone/-loudspeaker mode.

10. A system as in claim 7, wherein said microphone/loudspeakers each includes:

10 a microphone arrangement connected to a microphone arrangement in another of the plurality of microphone/loudspeakers;

a loudspeaker arrangement connected to a loudspeaker arrangement in another of the plurality of microphone/loudspeakers;

15 a phone control for coupling to the telephone line and coupled to said microphone arrangement; and selection arrangement to be coupled to the telephone line and to a plurality of other microphone/-loudspeakers, and to operate either in a microphone/-loudspeaker mode in which it is disconnected from the telephone line and a speakerphone mode in which it is connected to the telephone line;

20 said loudspeaker arrangement being decoupled from said phone control in the first state of said selection arrangement when the microphone/loudspeaker is connected to the telephone line and in speakerphone mode, and coupled to said phone control in another state of said selection arrangement responsive to signals from the microphone and to signals from the plurality of microphone/loudspeakers.

11. A system as in claim 10, wherein in each of said microphone/loudspeakers said microphone

REPLACEMENT SHEET

27 AUG 1996

Date : .....



arrangement includes a microphone, a voting circuit responsive to signals from the microphone and to signals from the other microphone/loudspeakers.

5 12. A system as in claim 10, wherein in each of said microphone/loudspeakers a hook switch is connected to said phone control.

10 13. A system as in claim 10, wherein in each of said microphone/loudspeakers said loudspeaker arrangement includes a loudspeaker and means for connecting said loudspeaker to other loudspeakers in the plurality of microphone/loudspeakers.

15 14. A system as in claim 10, wherein in each of said microphone/loudspeakers said loudspeaker arrangement includes a loudspeaker and first means for connecting said loudspeaker to a first of said other loudspeakers and said selection arrangement includes second means for connecting said loudspeaker to loudspeakers in other microphone/loudspeakers.

20 15. A system as in claim 10, wherein in each of said microphone/loudspeakers said microphone arrangement includes a microphone, a voting circuit responsive to signals from the microphone, and means for connecting said voting circuit to voting circuits in other microphone/loudspeakers, said microphone/loudspeaker further comprises a hook switch connected to  
25 said phone control.

16. A system as in claim 10, wherein in each of said microphone/loudspeakers said loudspeaker arrangement includes first means for connecting said

REPLACEMENT SHEET

Date: 27 AUG 1996



loudspeaker to a loudspeaker in a first of said plurality of said microphone/loudspeakers and said loudspeaker in each of said microphone/loudspeakers includes second means for connecting said loudspeaker to a loudspeaker in a second of the plurality of microphone/loudspeakers, said microphone arrangement includes a microphone, a voting circuit responsive to signals from the microphone, and means for connecting said voting circuit to voting circuits in other microphone/loudspeakers, each of said microphone/loudspeaker further comprises a hook switch connected to said phone control.

17. An apparatus, comprising:  
microphone means for receiving sound; loudspeaker means for transmitting sound; and means for placing said loudspeaker means in speakerphone relationship to said microphone means in response to a telephone line voltage and for removing said loudspeaker means from the speakerphone relationship in the absence of the telephone line voltage while maintaining said loudspeaker means and said microphone means in loudspeaker relationship.

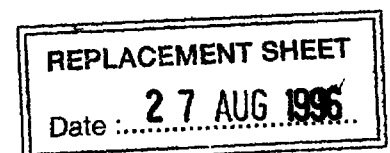


FIG. 1

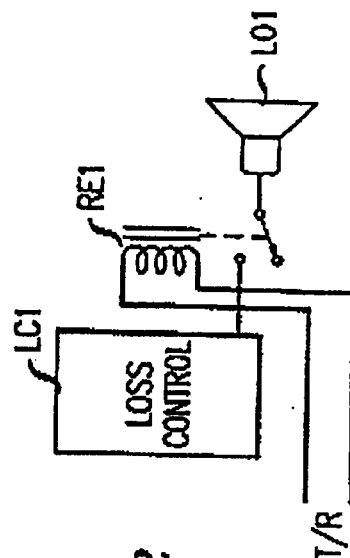
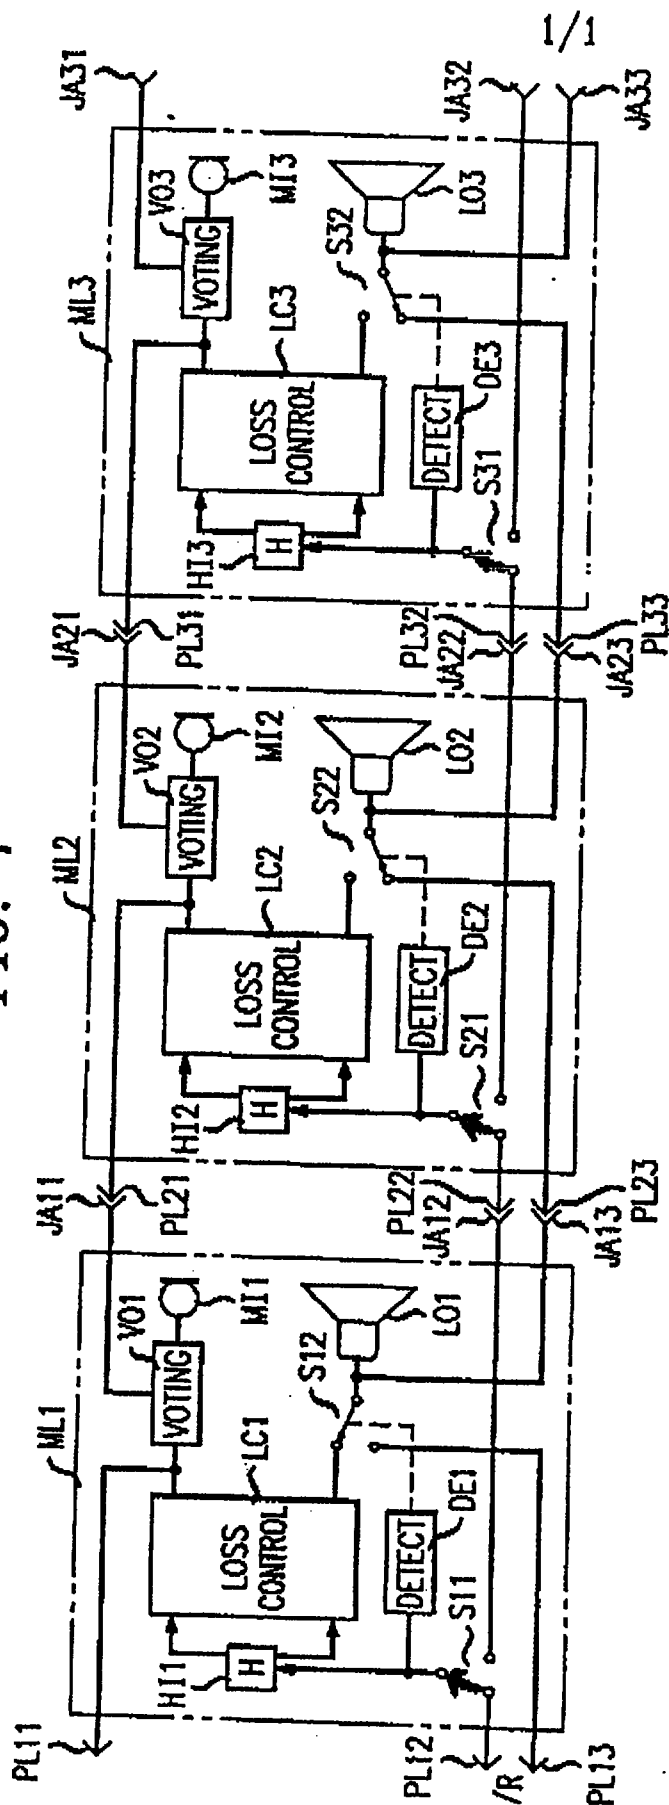


FIG. 2

REPLACEMENT SHEET

Date : 27 AUG 1996