

(51) International Patent Classification:
C10G 47/12 (2006.01)

(21) International Application Number:

PCT/US2010/061542

(22) International Filing Date:

21 December 2010 (21.12.2010)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

61/284,835 24 December 2009 (24.12.2009) US

(71) Applicant (for all designated States except US):
EXXONMOBIL RESEARCH AND ENGINEERING COMPANY [US/US]; 1545 Route 22 East, P.O. Box 900, Annandale, NJ 08801-0900 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **ELIA, Christine N.** [US/US]; 900 Ardsley Lane, Bridgewater, NJ 08807 (US). **HILBERT, Timothy Lee** [US/US]; 12811 Dogwood Hills Lane, Fairfax, VA 22033 (US). **BURNS, Louis Francis** [US/US]; 880 Pebblebank Lane, League City, TX 77573 (US). **JOSECK, Eric D.** [US/US]; 6621 Bestwicke Court, Burke, VA 22015 (US). **KIM, Jeenok**T. [US/US]; 2709 Laurel Grove Way, Fairfax, VA 22033 (US). **HANTZER, Sylvain S.** [FR/US]; 37620 Seven Oaks Avenue, Prairieville, Los Angeles, 70769 (US).(74) Agents: **BAKUN, Estelle C.** et al.; Exxonmobil Research and Engineering Company, 1545 Route 22 East, P.O. Box 900, Annandale, NJ 08801-0900 (US).


(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK,

[Continued on next page]

(54) Title: CATALYTIC DEWAXING PROCESS

Figure 3

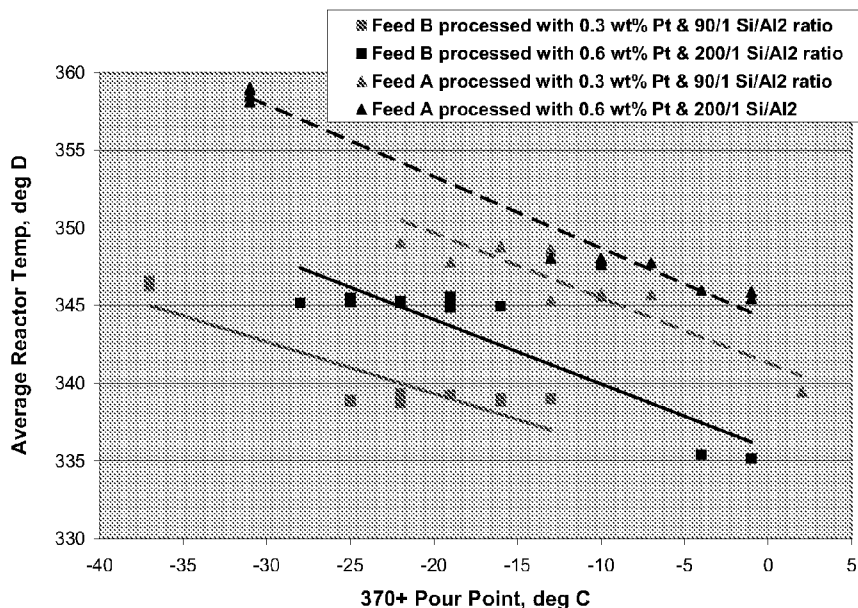

(57) Abstract: In a catalytic dewaxing process, a catalyst comprising from 40 to 80 wt% of ZSM-48 having a silica to alumina molar ratio of less than 200:1 and from 0.3 to 1.5 wt% of a metal or metal compound from Groups 8 to 10 of the Periodic Table of the Elements is provided in a reaction zone. The catalyst is periodically contacted in the reaction zone under dewaxing conditions with a first hydrocarbon feedstock having a wax content of less than 50 wt% and with a second hydrocarbon feedstock having a wax content of 50 wt% or more.

WO 2011/079116 A1



SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, **Published:**
GW, ML, MR, NE, SN, TD, TG).

— *with international search report (Art. 21(3))*