



- (51) **International Patent Classification:** Not classified
- (21) **International Application Number:** PCT/US2013/043083
- (22) **International Filing Date:** 29 May 2013 (29.05.2013)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:**
13/485,616 31 May 2012 (31.05.2012) US
- (71) **Applicant:** UNITED TECHNOLOGIES CORPORATION [US/US]; One Financial Plaza, Hartford, Connecticut 06101 (US).
- (72) **Inventors:** FEIGLESON, Steven J.; 3 Marston Way, Falmouth, Maine 04105 (US). TREMBLAY, Dennis R.; 5 Wilson Street, Biddeford, Maine 04005 (US).
- (74) **Agents:** BRUZZONE, Daniel L. et al.; 312 South Third Street, Minneapolis, Minnesota 55415-1028 (US).
- (81) **Designated States** (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM,

AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,
BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM,
DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KN, KP, KR,
KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME,
MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ,
OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC,
SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN,
TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

- (84) Designated States** (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— *without international search report and to be republished upon receipt of that report (Rule 48.2(g))*

(54) Title: STATOR VANE MISTAKE PROOFING

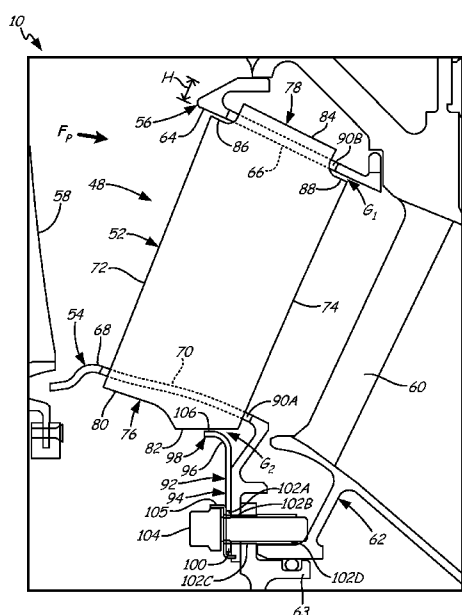


Fig. 2

(57) Abstract: An assembly for use in a gas turbine engine includes an inner diameter (ID) shroud having a plurality of ID slots and an outer diameter (OD) shroud having a plurality of OD slots. The OD shroud is positioned radially outward from the ID shroud. A first stator airfoil extends from the ID shroud to the OD shroud. The first stator airfoil is positioned at least partially in one of the ID slots and is positioned at least partially in one of the OD slots. A first end of the first stator airfoil has one of a raised tab and an indented notch.