CORRECTED VERSION*

PCT

200101580-9 IPOS

WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 6 : A61M 5/178 — A1

(11) International Publication Number: WO 00/18453

(43) International Publication Date: 6 April 2000 (06.04.00)

(21) International Application Number: PCT/US99/22497

(22) International Filing Date: 29 September 1999 (29.09.99)

(30) Priority Data:
60/102,436 30 September 1998 (30.09.98) US

(71) Applicant: COMAR, INC. [US/US]; One Comar Place, Buena, NJ 08310 (US).

(72) Inventors: BUEHLER, John, D.; 20 Bishops Run Lane, Bridgeton, NJ 08302 (US). MATHIAS, Eric, S.; 42 1/2 Old Deerfield Pike, Bridgeton, NJ 08302 (US).

(74) Agent: RENZ, Eugene, E., Jr.; Eugene E. Renz, Jr. P.C., P.O. Box 2056, 205 North Monroe Street, Media, PA 19063 (US).

(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, GH, GM, HR, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

Published

With international search report.


Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.

1 PD IPC: A61M 5/178
1 applⁿ.
2 Invs.

(54) Title: EXACT DOSE DISPENSER DEVICE ASSEMBLY

(57) Abstract

This invention is a dosage dispenser assembly for containers to dispense liquids in the containers. The assembly includes an elongated hollow barrel (1), and means for removably mounting the barrel over the discharge opening in the container (9) so that the port in the barrel in the seated position is disposed adjacent the bottom of the container (9). A stop sleeve of generally tubular configuration engages internally of the barrel, and has at least two key ways of different axial depth defining cam follower surfaces. A plunger (5) engages in the barrel having a lug element (6), and is rotatable relative to the stop sleeve between a position wherein the plunger tip is fully seated in the barrel and another position wherein the plunger may be activated axially to draw a predetermined dosage of liquid contents into the barrel.

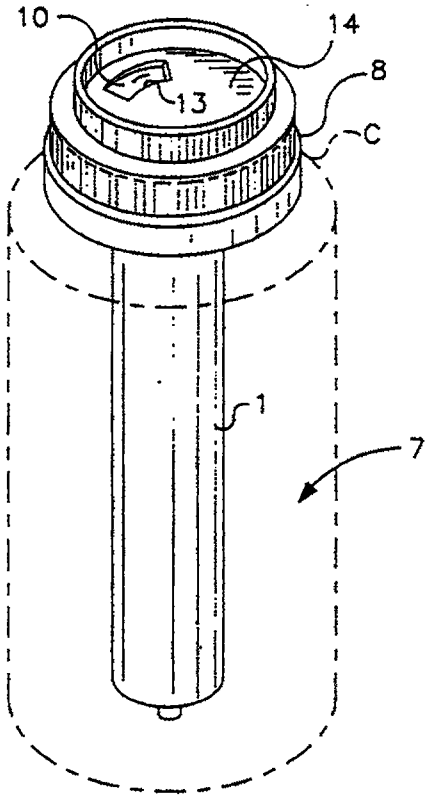

*(Referred to in PCT Gazette No. 35/2000, Section II)