

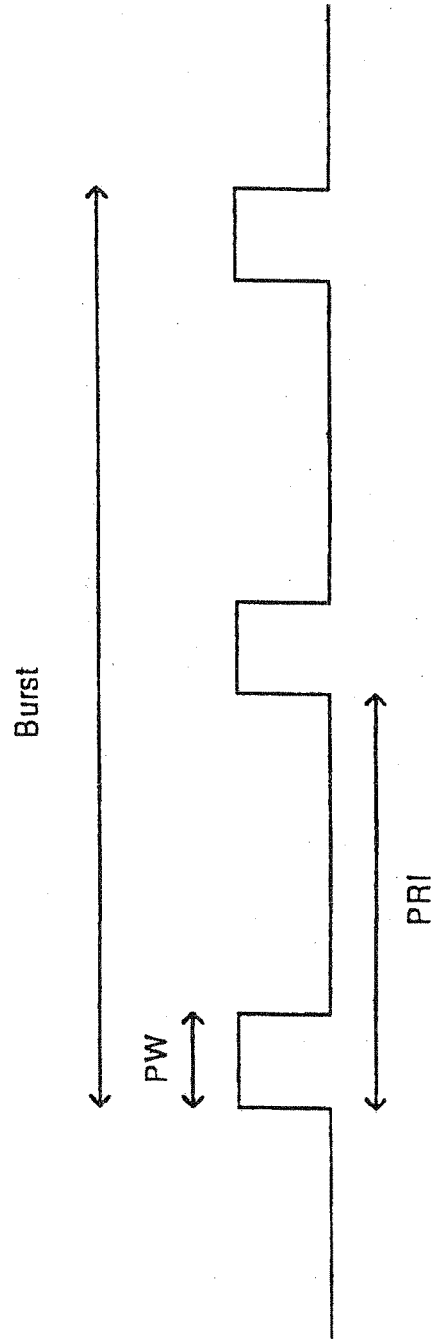
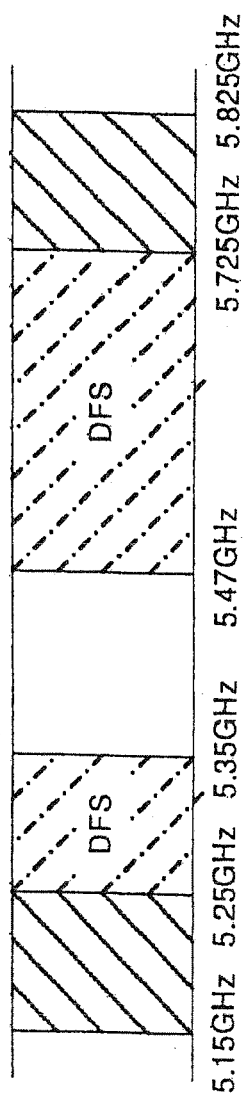


FIG. 1
Prior Art

**FIG. 2**

Maximum Transmit Power	Value
≥ 200 mW	-64 dBm (Access Point)
< 200 mW	-62 dBm (Client Station)

FIG. 3

Parameter	Value
Non-occupancy period	30 minutes
Channel Availability Check Time	60 s
Channel Move Time	10 s
Channel Closing Transmission Time	200 ms + approx. 60 ms over remaining 10 s period

FIG. 4

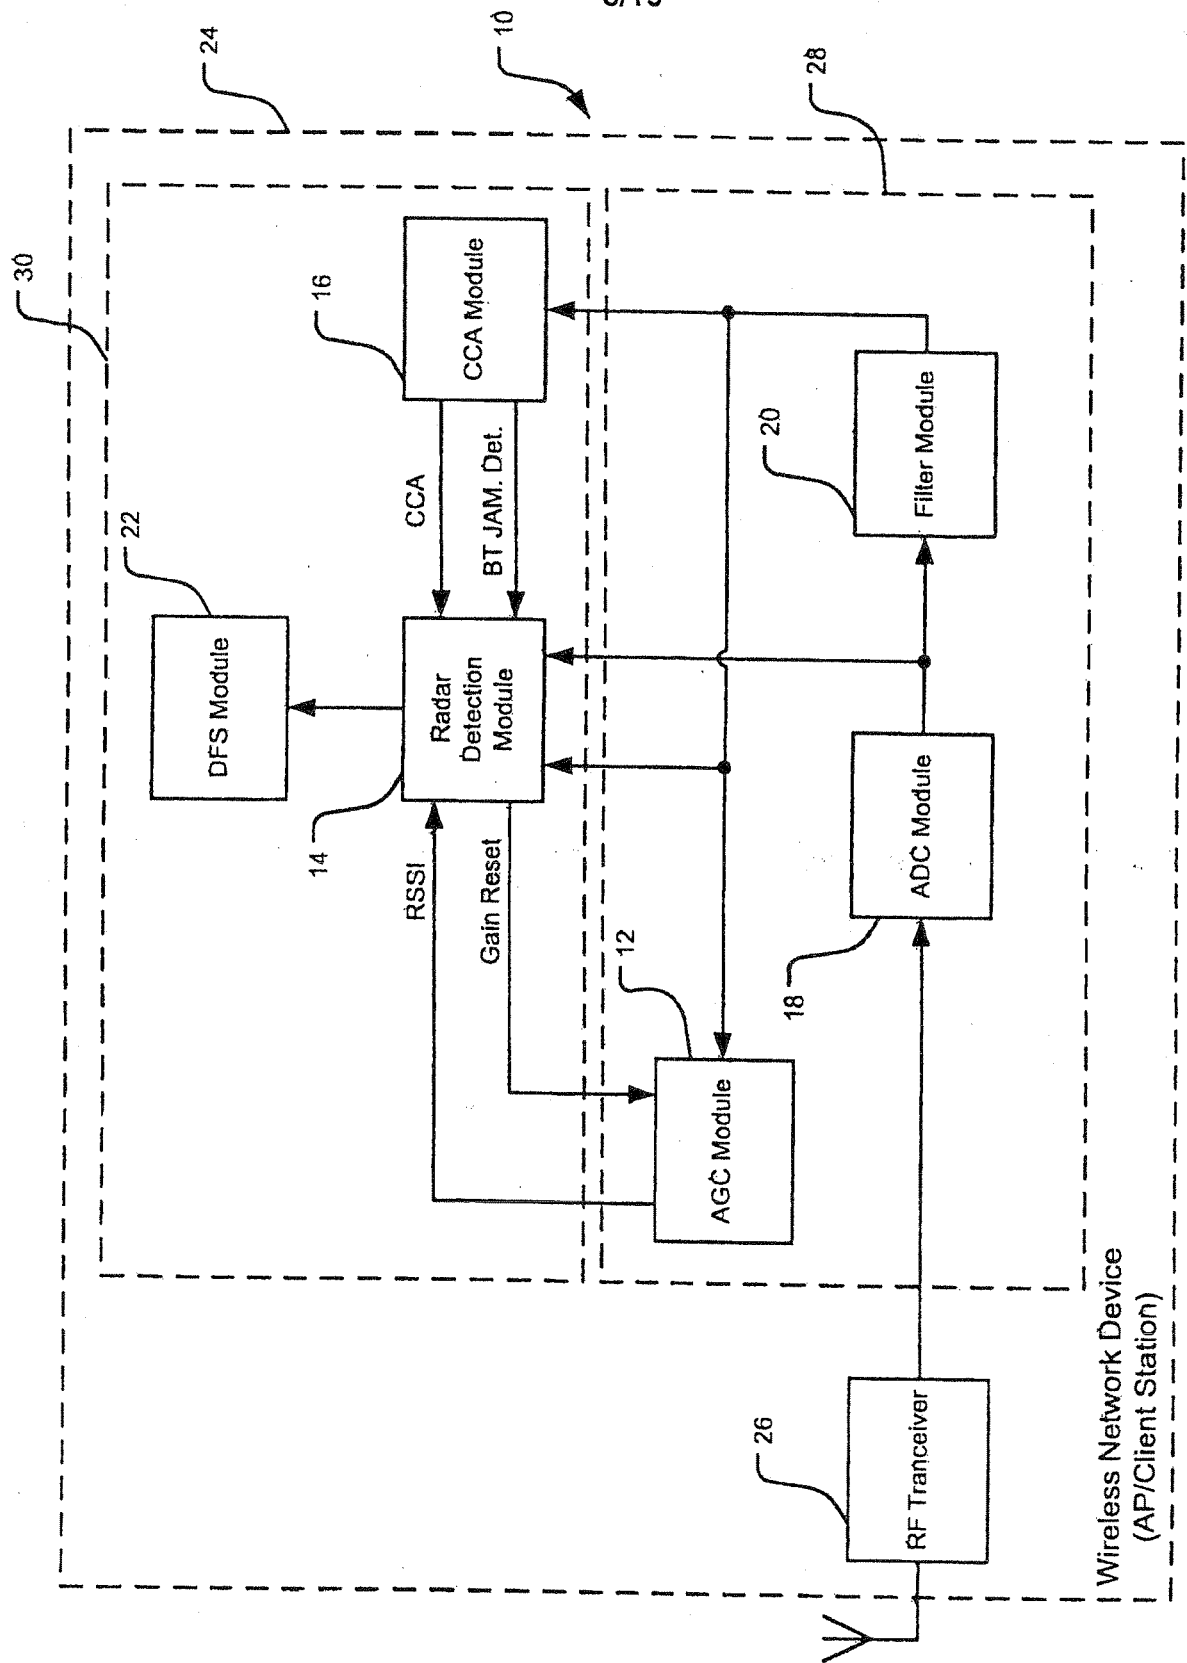
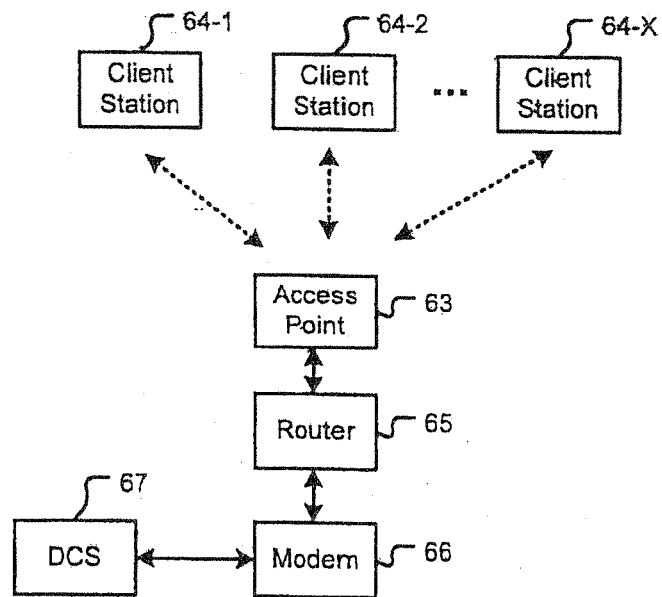
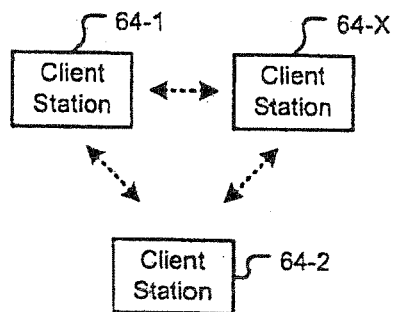
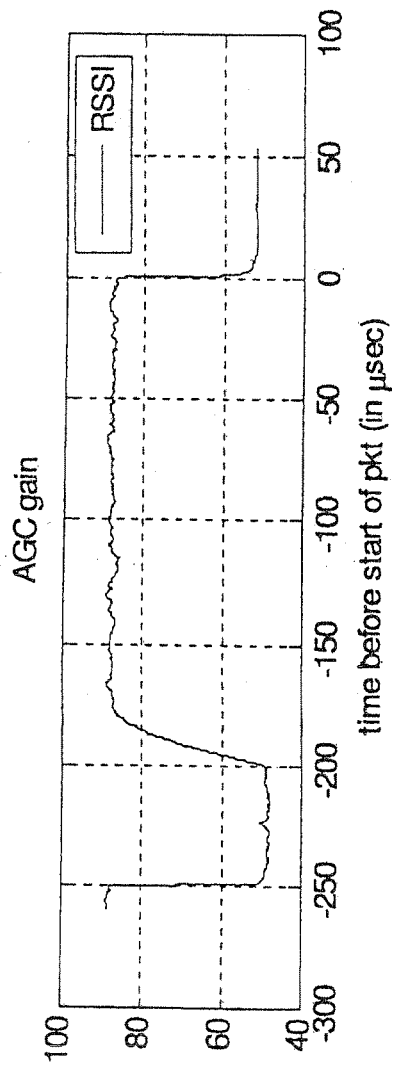
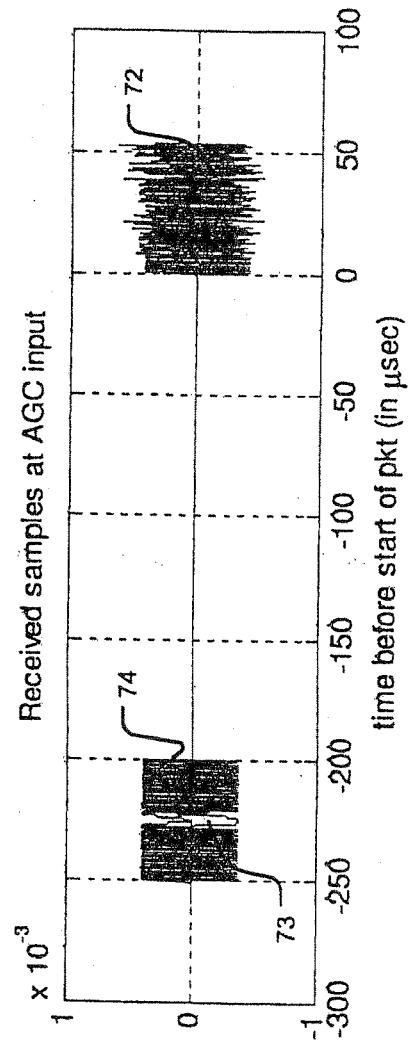



FIG. 5


**FIG. 6A****FIG. 6B**


Radar Bin Index	Pulse Width (PW) in μsec	Pulse Repetition Interval (PRI) in μsec
1	1	1428
2	1-5	150-230
3	6-10	200-500
4	11-20	200-500


FIG. 7


**FIG. 8A****FIG. 8B**

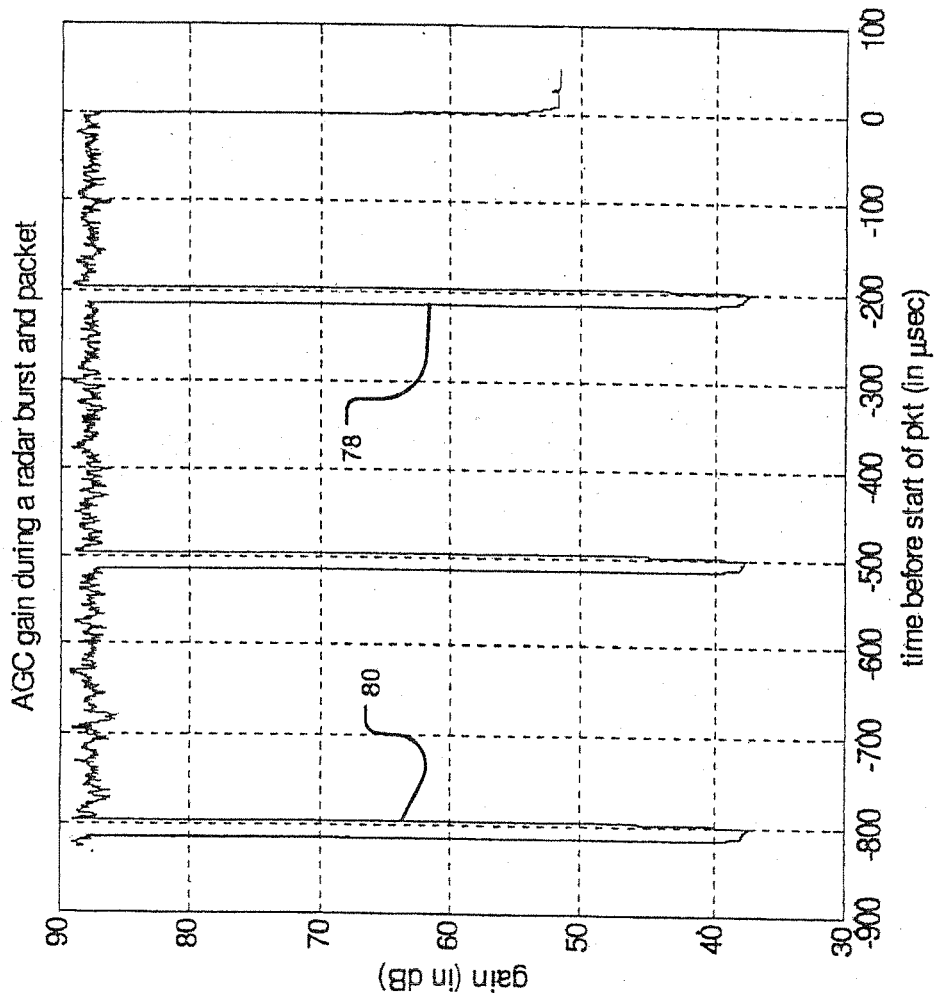**FIG. 9A**

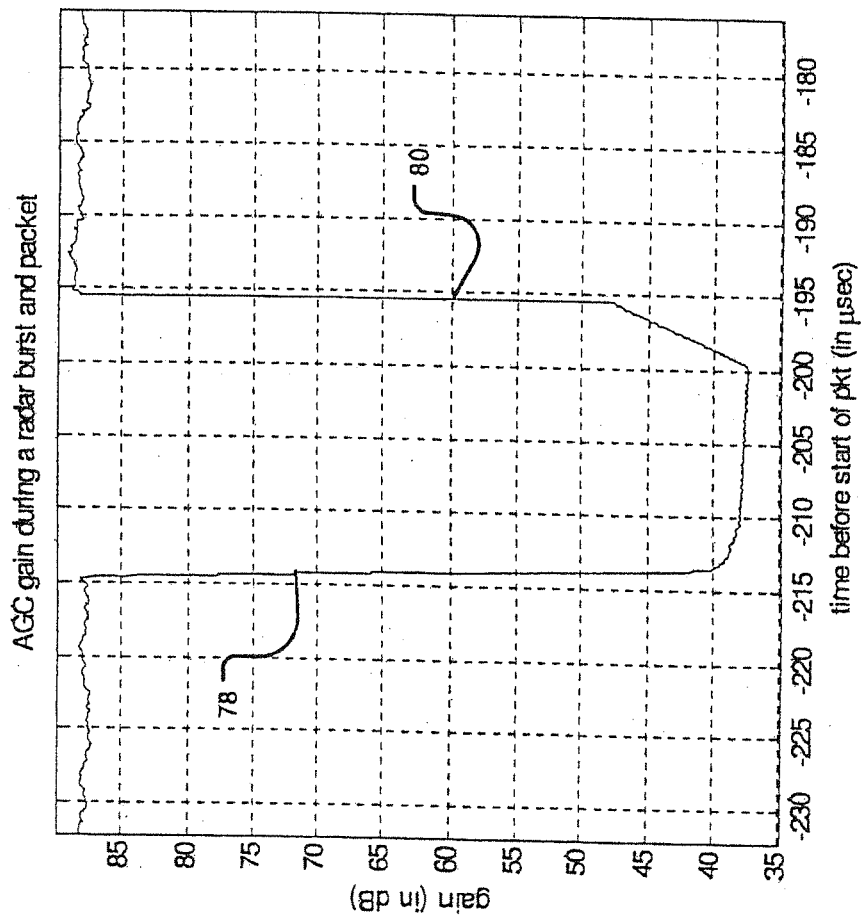**FIG. 9B**

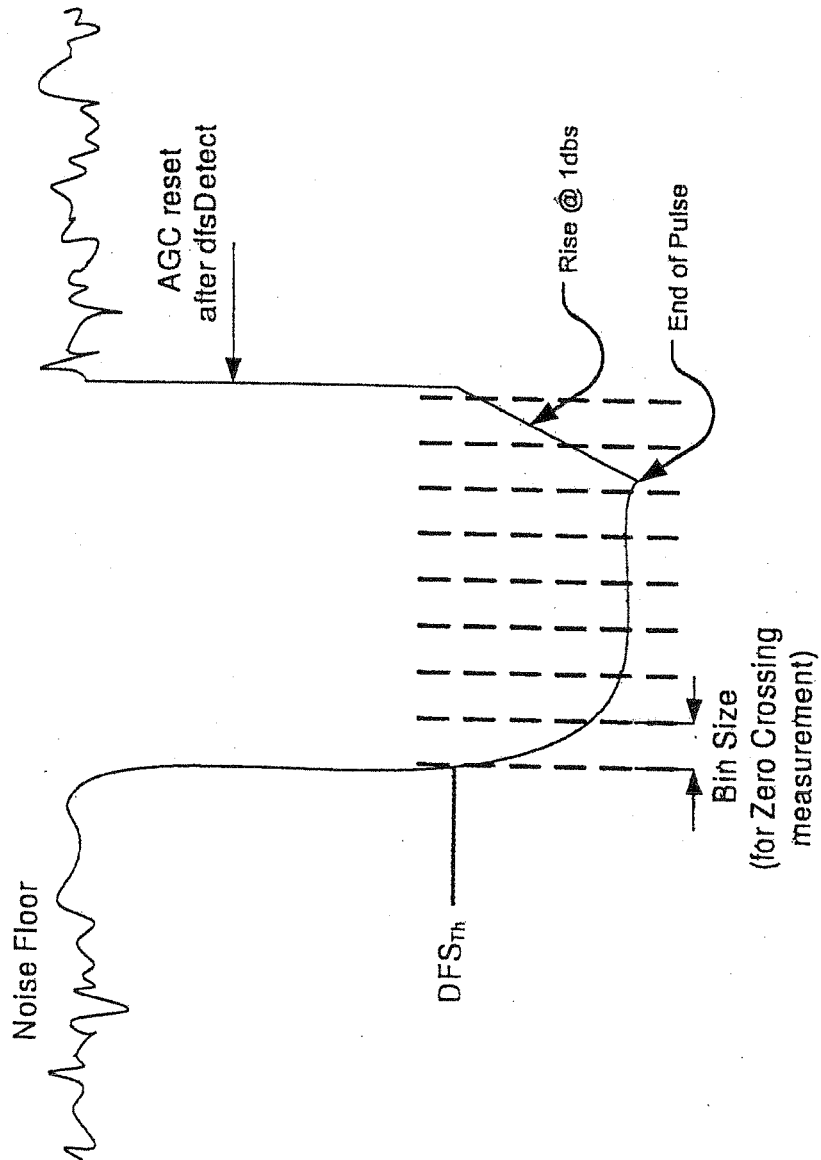**FIG. 10**

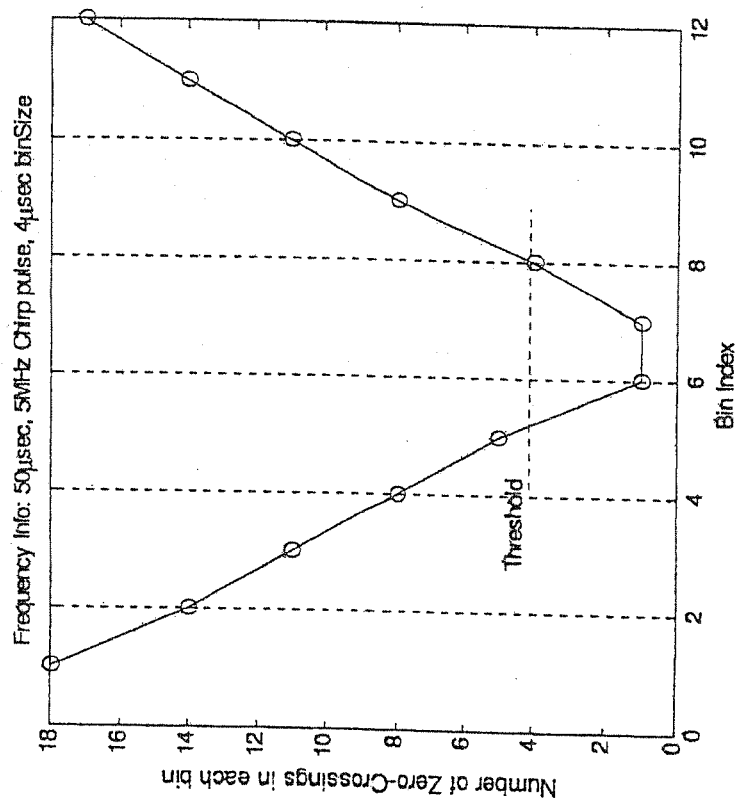**FIG. 11**

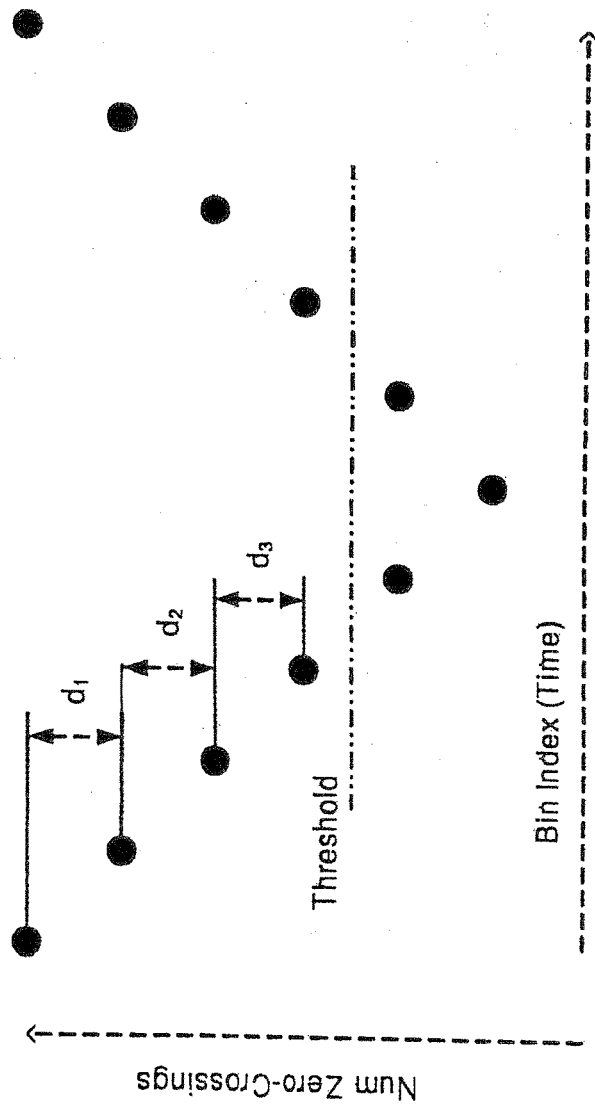FIG. 12

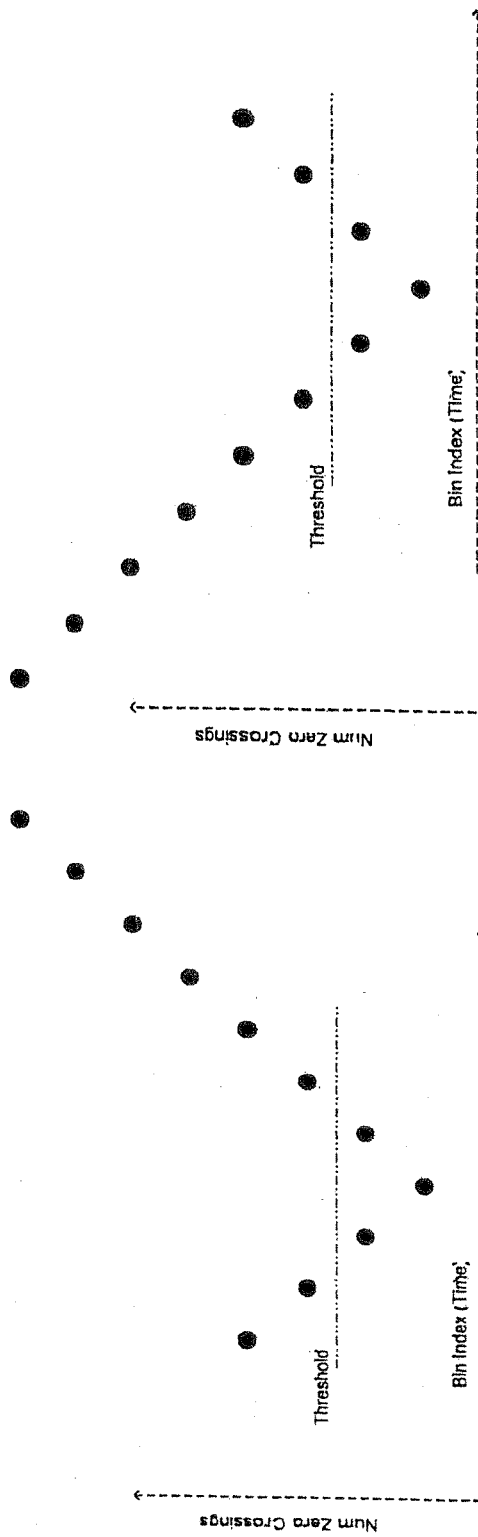
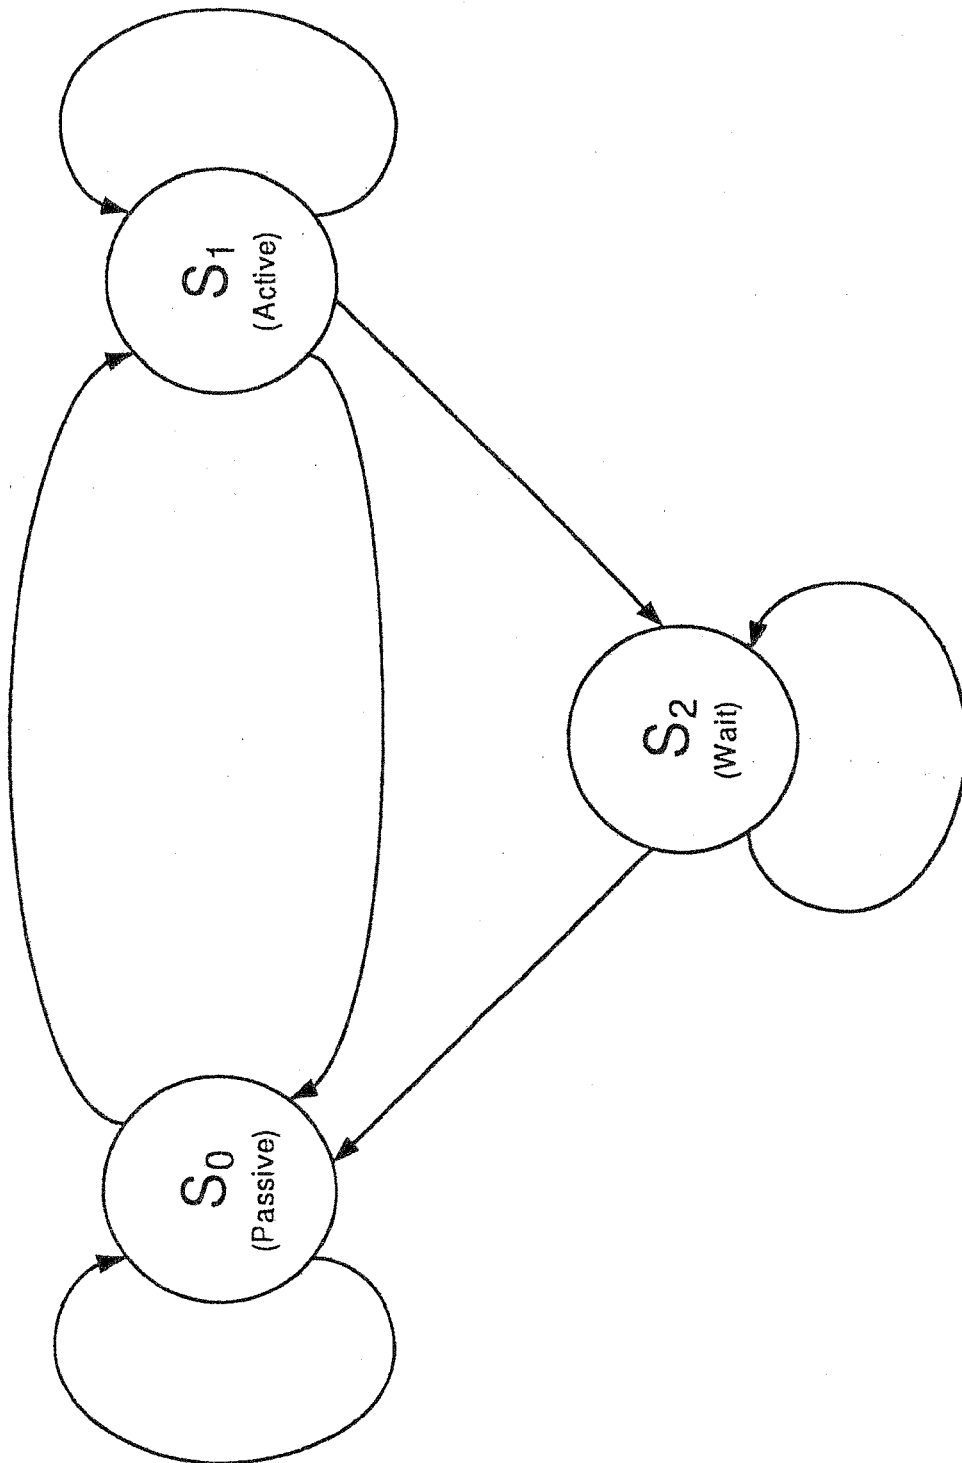
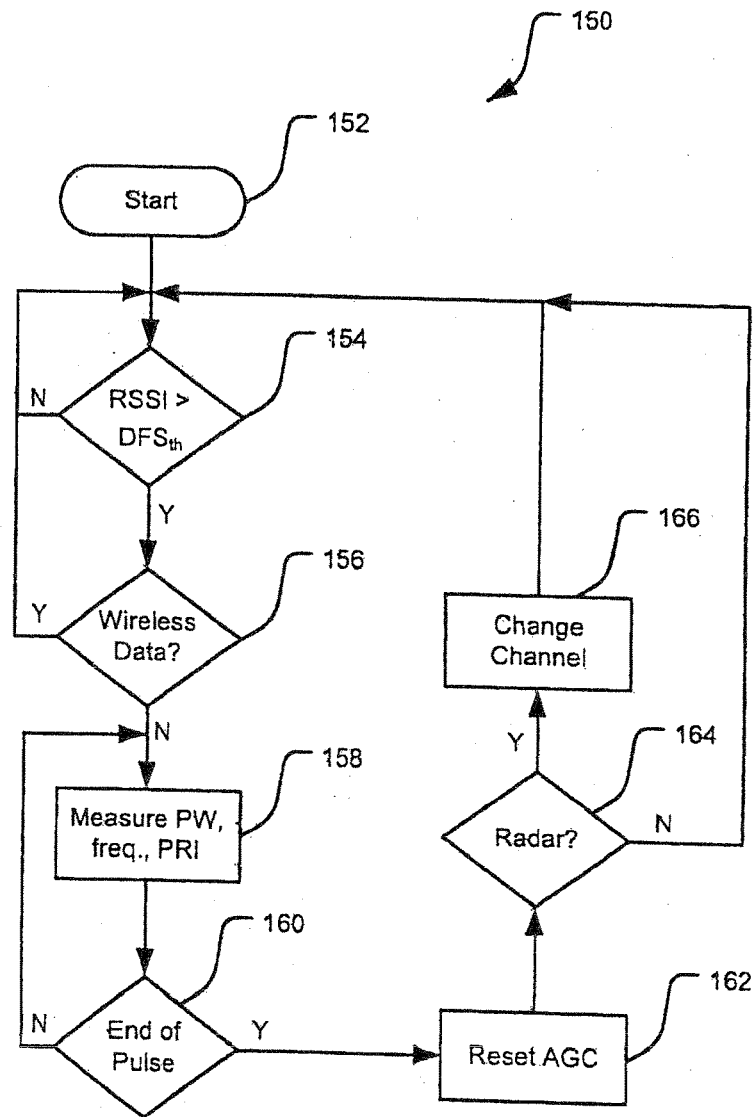


FIG. 13

**FIG. 14**

**FIG. 15**

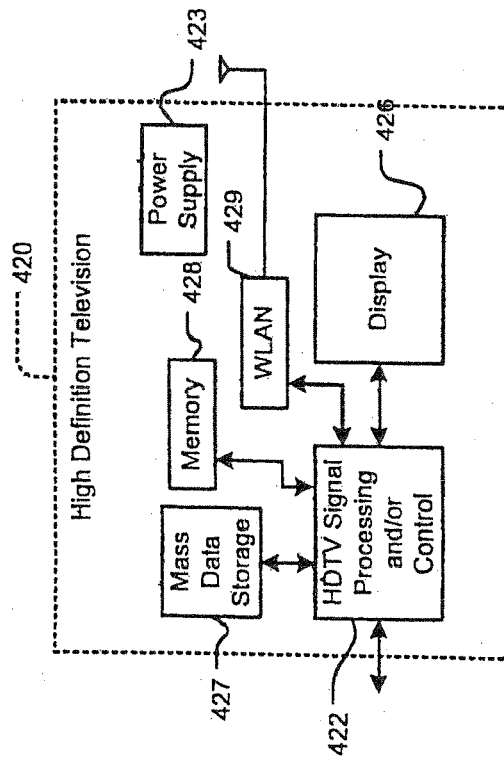


FIG. 16A

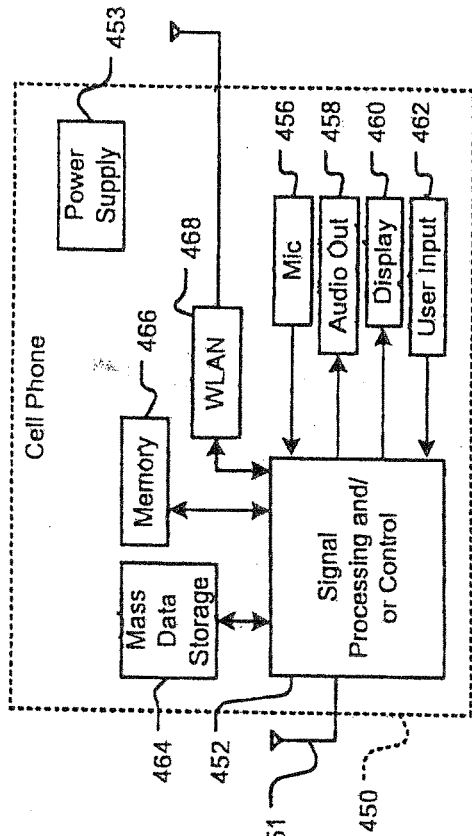


FIG. 16B

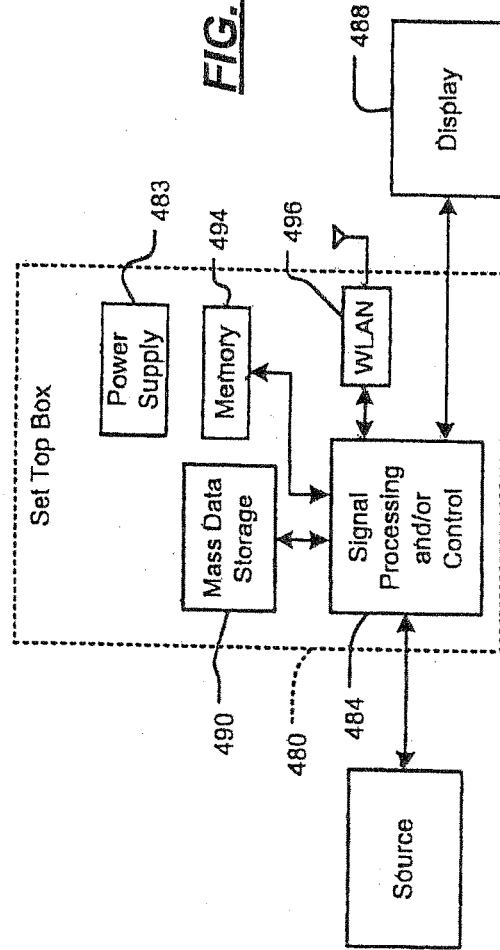


FIG. 16C

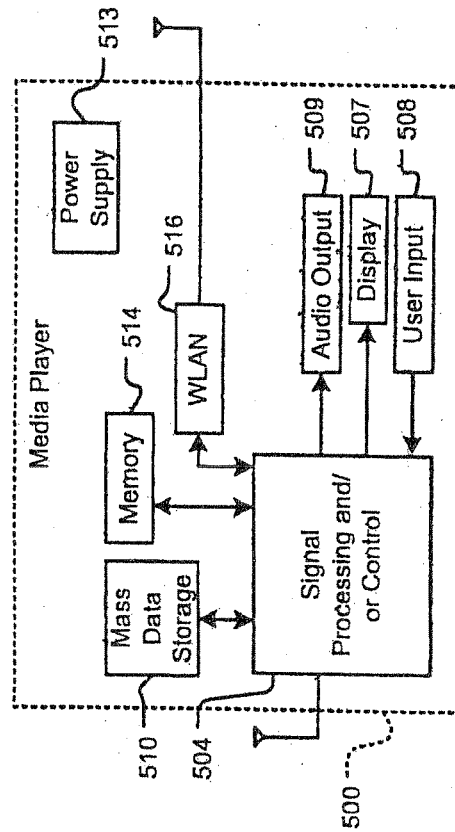


FIG. 16D