

(12) 特許協力条約に基づいて公開された国際出願

(19) 世界知的所有権機関
国際事務局



(43) 国際公開日
2011年5月26日(26.05.2011)

(10) 国際公開番号
WO 2011/062173 A1


PCT

- (51) 国際特許分類:
C08F 2/24 (2006.01) *C08F 2/44* (2006.01)
- (21) 国際出願番号: PCT/JP2010/070429
- (22) 国際出願日: 2010年11月17日(17.11.2010)
- (25) 国際出願の言語: 日本語
- (26) 国際公開の言語: 日本語
- (30) 優先権データ:
特願 2009-263240 2009年11月18日(18.11.2009) JP
- (71) 出願人 (米国を除く全ての指定国について): 綜研化学株式会社 (SOKEN CHEMICAL & ENGINEERING CO., LTD.) [JP/JP]; 〒1718531 東京都豊島区高田三丁目2番5号 Tokyo (JP).
- (72) 発明者: および
- (75) 発明者/出願人 (米国についてのみ): 関谷 敏雄 (SEKIYA, Toshio) [JP/JP]; 〒3501320 埼玉県狭山市広瀬東一丁目1番1号 綜研化学株式会社内 Saitama (JP).
- (74) 代理人: 特許業務法人 S S I N P A T (SSINPAT PATENT FIRM); 〒1410031 東京都品川区西五反田七丁目1番6号 五反田山崎ビル6階 Tokyo (JP).
- (81) 指定国 (表示のない限り、全ての種類の国内保護が可能): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.
- (84) 指定国 (表示のない限り、全ての種類の広域保護が可能): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), ユーラシア (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), ヨーロッパ (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- 添付公開書類:
— 国際調査報告 (条約第21条(3))

(54) Title: RESIN PARTICLES AND PROCESS FOR PRODUCTION THEREOF

(54) 発明の名称: 樹脂粒子およびその製造方法

[図2]

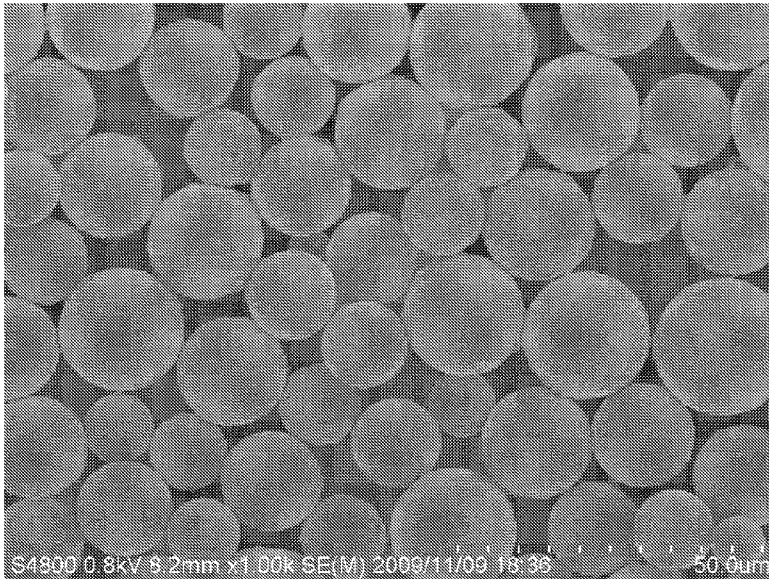

(57) Abstract: Provided are resin particles in which the amount of an inorganic dispersant (such as silica) adhering to the surfaces is smaller than that in conventional resin particles and which have uniform particle diameters. Specifically provided are resin particles in which an inorganic dispersant adheres to the surfaces and which have a volume-mean particle diameter of 1 to 1000 μ m, said resin particles being characterized in that the amount of the inorganic dispersant adhering to the surfaces of the resin particles is 0.0001 to 0.02g/m² as calculated by equation (I): the amount of the inorganic dispersant adhering to the surfaces of the resin particles = [(the amount (parts by weight) of the inorganic dispersant)/(the amount (parts by weight) of the polymerizable monomer)]/[the specific surface area of the resin particles as determined with Mastersizer 2000 manufactured by Malvern Instruments Ltd.] In equation (I), the amounts of the inorganic dispersant and the polymerizable monomer on the right side are respectively the amounts

thereof introduced in producing the resin particles, with the amount of the polymerizable monomer being taken as 100 parts by weight].

(57) 要約:

[続葉有]

WO 2011/062173 A1