

(12) NACH DEM VERTRAG ÜBER DIE INTERNATIONALE ZUSAMMENARBEIT AUF DEM GEBIET DES
PATENTWESENS (PCT) VERÖFFENTLICHTE INTERNATIONALE ANMELDUNG(19) Weltorganisation für geistiges Eigentum
Internationales Büro(43) Internationales Veröffentlichungsdatum
24. April 2003 (24.04.2003)

PCT

(10) Internationale Veröffentlichungsnummer
WO 03/033997 A1(51) Internationale Patentklassifikation⁷: G01C 3/00, G02B 27/09, G01B 11/14

(72) Erfinder; und

(21) Internationales Aktenzeichen: PCT/EP01/12009

(75) Erfinder/Anmelder (nur für US): GÄCHTER, Bernhard [CH/CH]; Kapfstrasse 4b, CH-9436 Balgach (CH). SCHILLING, Andreas [DE/CH]; Riedmatt 28A, CH-6300 Zug (CH). STAUFFER, Laurent [CH/CH]; Lehmstrasse 5, CH-9443 Widnau (CH). VOKINGER, Urs [CH/CH]; Haslachstrasse 2581, CH-9434 Au (CH).

(22) Internationales Anmeldedatum:
17. Oktober 2001 (17.10.2001)

(25) Einreichungssprache: Deutsch

(74) Anwalt: BÜCHEL KAMINSKI & PARTNER PATENTANWÄLTE EST.; Letzanaweg 25-27, FL-9495 Triesen (LI).

(26) Veröffentlichungssprache: Deutsch


(71) Anmelder (für alle Bestimmungsstaaten mit Ausnahme von US): LEICA GEOSYSTEMS AG [CH/CH]; Heinrich-Wild-Strasse, CH-9435 Heerbrugg (CH).

(81) Bestimmungsstaaten (national): AU, CA, JP, NO, SG, US.

[Fortsetzung auf der nächsten Seite]

(54) Title: OPTICAL TELEMETER

(54) Bezeichnung: OPTISCHER ENTFERNUNGSMESSE

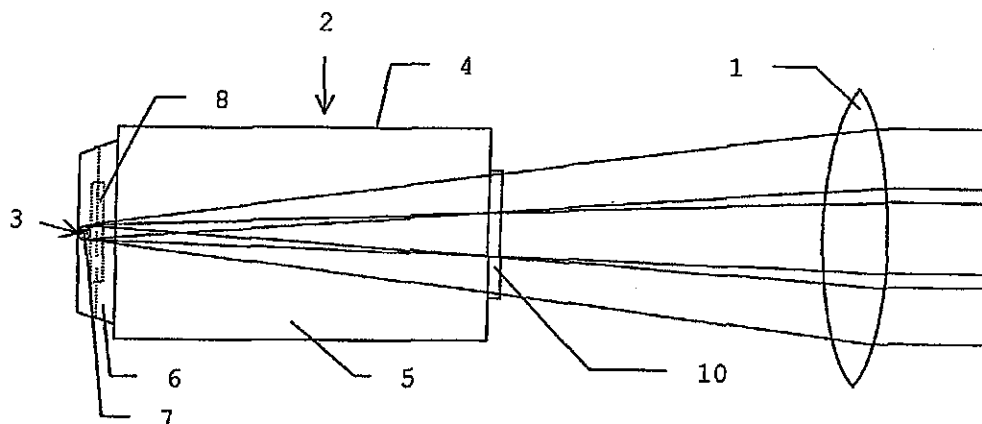

(57) Abstract: In order to improve target illumination, a light source (2) of an emitter, which has a laser diode (3) configured as an edge emitter with a wavelength of 1550 nm, has beam-forming optics (4) mounted downstream in relation thereto, which comprise a cylindrical lens (7) and a first deflection element (8) with three fields having different diffraction structures. Said deflection element deflects partial beams, exiting from successive segments of the emission edge, to three fields of a second deflection element (10) which are adjacent to each other and perpendicular to said emission edge and which also have different diffraction structures. Said second deflection element directs the partial beams to the aperture of a collimator (1), such that the partial beams substantially fill said aperture. The first deflection element (8) and a mount (6) for the cylindrical lens (7) are integral and, like the second deflection element (10), are made of plastic. Both parts are stuck on opposite faces of a block (5) made of glass.

(57) Zusammenfassung: Zwecks Verbesserung der Zielausleuchtung weist eine Lichtquelle (2) eines Senders mit einer als Kantenemitter mit einer Wellenlänge von 1550 nm ausgebildeten Laserdiode (3) eine derselben nachgeordnete Strahlformungsoptik (4) auf, die eine Zylinderlinse (7) umfasst sowie ein erstes Umlenkelement (8) mit drei verschiedene Beugungsstrukturen tragenden Feldern, welches von aufeinanderfolgenden Abschnitten der Emissionskante ausgehende Teilstrahlen auf quer zu derselben nebeneinanderliegende, ebenfalls drei verschiedene Beugungsstrukturen tragende Felder eines zweiten Umlenkelements (10) ablenkt, das die Teilstrahlen derart auf die Apertur eines Kollimators (1) lenkt, dass sie dieselbe im wesentlichen ausfüllen. Das erste Umlenkelement (8) und eine Halterung (6) für die Zylinderlinse (7) sind einstückig und wie das zweite Umlenkelement (10) aus Kunststoff hergestellt. Die beiden Teile sind auf entgegengesetzte Stirnflächen eines Blocks (5) aus Glas aufgeklebt.

WO 03/033997 A1



(84) Bestimmungsstaaten (*regional*): europäisches Patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR).

— mit geänderten Ansprüchen

Veröffentlicht:

— mit internationalem Recherchenbericht

Zur Erklärung der Zweibuchstaben-Codes und der anderen Abkürzungen wird auf die Erklärungen ("Guidance Notes on Codes and Abbreviations") am Anfang jeder regulären Ausgabe der PCT-Gazette verwiesen.

DESCRIPTION

OPTICAL TELEMETER

Technical field

The invention relates to an optical telemeter such as employed for instance in the surveying of plots of land and buildings.

Prior art

Optical telemeters of this kind have been known for some time already. The laser diodes used as light sources have the disadvantage, however, that the light beam exiting at the emission edge has a very long and narrow cross section. This leads to poor target illumination, since only part of the light beam strikes the target thus detracting from the range and from measuring accuracy. Moreover, reflection of parts of the beam missing the target at other objects, which for instance are more distant, may acutely disturb the measurements.

Description of the invention

Example embodiments of the present invention are based on the task to specify an optical telemeter of the above kind providing a better target illumination than known telemeters of this kind.

The advantages attained by example embodiments of the present invention reside in a decisive improvement of range, i.e., the maximum distance that can be measured or, for a given range, in an increased measuring accuracy.

In accordance with an aspect of the present invention, there is provided an optical telemeter with at least one light source for target illumination and with a collimator collimating the radiation to be emitted by the telemeter prior to target illumination, the light source being arranged in front of the collimator and fitted with a laser diode

form as edge emitter, as well as with a receiver and a control and evaluating unit, **characterized in that** the light source has beam forming optics mounted downstream of the laser diode and at least approximately illuminating the collimator, so designed that it offsets partial beams emitted from successive segments of the emission edge of laser diode parallel to each other in such a way that their projections onto a plane overlap at least to a large extent, the plane being rotated with respect to the plane formed by the emission edge and the beam direction, the beam forming optics comprising a first deflection element based on diffraction or refraction of light, and a second deflection element based on diffraction or refraction of light, each having an essentially plane surface with structuring, the structuring being divided into at least two fields.

Brief description of the drawings

In the following, the invention is described in greater detail with the aid of figures representing merely one embodiment.

Figure 1a schematically shows a lateral view of an emitter of a telemeter according to the invention,

5 Figure 1b schematically shows a top view of the emitter according to Figure 1a,

Figure 3 shows a top view in beam direction of a first deflection element of the emitter according to Figures 1a, b,

10 Figure 4 shows a top view counter to the beam direction of a second deflection element of the emitter according to Figures 1a, b, and

Figure 5 shows the target illumination attained by the emitter according to Figures 1a, b.

15 Ways to practice the invention

An optical telemeter according to the invention comprises an emitter as well as a receiver that, in known manner, can for instance be built up with optics and avalanche photodiodes, and further comprises an electronic control and evaluating unit also of known design
20 controlling the emission of light pulses by the emitter and evaluating the output signal of the receiver. The distance can be measured by transit-time determination or by the phase-matching technique.

The emitter has a collimator 1 and a light source 2 put in front of it which is composed of a
25 laser diode 3 and beam forming optics 4. The laser diode 3 is an edge emitter emitting electromagnetic waves in the infrared, preferably at a wavelength between 850 nm and 980 nm or a wavelength $\lambda = 1,550$ nm. The emission edge has a length between 30 μm and 800 μm while its width is between 1 μm and 3 μm . The emission edge may be interrupted in its longitudinal direction. For instance, instead of one laser diode 3 a linear array of laser
30 diodes having edge lengths of for instance 50 μm and distances between successive edges of 100 μm could be provided. The numerical aperture corresponding to the sine of half the angular aperture has a value of 0.1 parallel to the emission edge and of 0.6 to 0.7 transverse

to this edge. The product of these two quantities, known as space bandwidth product (SBP), in a direction transverse to the emission edge approximately corresponds to the wavelength, and thus is practically monomodal (transverse mode of 0), i.e., it is close to a fundamental limiting value that cannot be exceeded, while parallel to the emission edge it is larger than this limiting value by a factor of 10 to 100. Even in this direction the SBP cannot be altered by conventional refracting elements such as lenses, but with the aid of elements based on diffraction or refraction of light, it can be lowered very close to the emission edge by rearrangement in a direction parallel to the emission edge but instead be enhanced in a direction transverse to this edge, and thus the light beam can be more strongly collimated.

This is the purpose of the beam forming optics 4 comprising a parallelepipedal block 5 consisting of a transparent material, preferably glass, with a first front face turned toward the laser diode 3 and an opposite second front face turned toward the collimator 1. The first front face supports a mount 6 of plastic holding a cylindrical lens 7 at its terminal zones. The cylindrical lens 7 has a circular cross section, its diameter is about 60 μm . It is oriented parallel to the emission edge of laser diode 3 and spaced apart from this diode by about 10 μm . The beam exiting from the emission edge which for laser diodes of the kind employed has a large transverse radiation angle of about 80° is made parallel by it. The diameter of the cylindrical lens and its distance from the emission edge may also be much larger than the given values, but for small values, particularly for values of at most 65 μm and at most 15 μm , respectively, the overlap of the fractions coherently radiated from successive regions of the edge is very small so that the losses caused by this overlap are also kept low.

Downstream of the cylindrical lens 7 a first deflection element 8 is arranged which is integral with the mount 6 and has a structured surface that is essentially plane and parallel to the first front face of block 5. Parallel to the emission edge it is divided into three successive fields 9a, b, c having different stepped diffraction structures. The second, opposite front face of block 5 supports a second deflection element 10 consisting of plastic and comprising a structured surface essentially plane and parallel to the second front face that is divided into three successive fields 11a, b, c transverse to the emission edge also having different stepped diffraction structures.

The upper field 9a of the first deflection element 8 has a structure such that it deflects the partial beam exiting from an upper segment of the emission edge and striking it to the left-hand field 11a (looking in beam direction) of the second deflection element 10 where the beam is insignificantly deflected so that it will strike the collimator 1 and approximately fill the left-hand third of the collimator's aperture. In exactly corresponding manner, the lower field 9c of the first deflection element 8 deflects the partial beam exiting from a lower segment of the emission edge and striking it, to the right-hand field 11c (looking in beam direction) of the second deflection element 10, where this beam, too, is deflected precisely in the corresponding way and then fills approximately the right-hand third of the aperture of collimator 1. The central third of the collimator is filled by the partial beam exiting from a slightly shorter central segment of the emission edge and passing without deflection through the unstructured central fields 9b and 11b of the first deflection element 8 and second deflection element 10, respectively.

Thus, the three partial beams are so deflected in different ways by the first deflection element 8 that they strike the second deflection element 10 side by side (when looking in a direction transverse to the emission edge), hence their projections onto a plane formed, purely as an example here, by the directions of the emission edge and of the beam essentially coincide. However, a deflection can also occur in such a way that the projection occurs onto a plane which for instance is rotated relative to the plane formed by the directions of the emission edge and of the beam. The essential point is that of avoiding a crossing of the partial beams. A deflection according to the invention can be functionally integrated into the deflection element 8 by suitable design of this element or by additional elements, which may where appropriate even be applied to the deflection element.

In the second deflection element 10 the partial beams are then so deflected in different ways that they strike the collimator 1 as if they all came from a line parallel to, or rotated relative to, the emission edge in the focal plane of collimator 1 or, stated differently, in such a way that their back extrapolation will lead to such a line, and that each partial beam fills approximately one third of the aperture of collimator 1. The three successive segments of the emission edge are imaged onto a nearly square field, and indeed in such a way that

they are superimposed in the far field (Figure 5). This secures an excellent target illumination.

At wavelengths between 850 nm and 950 nm the beam can be collimated very strongly, allowing a range scan with high lateral resolution. Wavelengths around 1,550 nm are also very advantageous, since then the upper limit of the admissible single-pulse energy which is defined in terms of safety to the eyes has a value of about 8 mJ and thus is higher by a factor of about 16,000 than at wavelengths between 630 and 980 nm. By employing this factor at least in part, which becomes possible because of better beam concentration according to the invention, one can very substantially increase the range or, for a given range, raise the sensitivity.

The mount 6 and the first deflection element 8 that is integral with it, as well as the second deflection element 10, each are produced by one of the replication techniques as described in M. T. Gale, 'Replication', in H. P. Herzig (editor), 'Micro-Optics', Taylor & Francis 1997, pp. 153-177, for instance by etching of a cylinder or piston of quartz and by hot embossing, injection molding, or casting followed by UV curing, and are then bonded to block 5. The definition of the diffraction structures can be performed with known computer programs. The replication technique allows large numbers of parts to be fabricated at favorable cost. Since the mount 6 is also made by this technique, a very precise positioning of cylindrical lens 7 is possible. The tolerated variation of distance between the lens and the first deflection element 8 is a few micrometers. Using soldering and active adjustment as described in DE-A-197 51 352, the laser diode 3 can then be bonded in such a way to the beam forming optics 4 that the tolerated variation of mounting between it and the cylindrical lens 7 is about 0.5 μm .

Various modifications of the embodiment described are possible. Thus, the cylindrical lens may be fastened with cement directly to the laser diode. The first deflection element and the second deflection element may also consist of glass, and for instance be made by an etching process. They may also be etched directly into the block separating them. The number of fields in the deflection elements may be two, four or more, instead of three. The beam forming optics may also consist of refracting elements, for instance prisms and

plates. Finally, laser diodes having wavelengths particularly between 600 nm and 1,000 nm, and more particularly between 630 nm and 980 nm which are outside the regions indicated above can be employed.

5 **List of reference symbols**

	1	Collimator
	2	Light source
	3	Laser diode
10	4	Beam forming optics
	5	Block
	6	Mount
	7	Cylindrical lens
	8	first deflection element
15	9a,b,c	Fields
	10	second deflection element
	11a,b,c	Fields

CLAIMS

1. Optical telemeter with at least one light source for target illumination and with a collimator collimating the radiation to be emitted by the telemeter prior to target illumination, the light source being arranged in front of the collimator and fitted with a laser diode form as edge emitter, as well as with a receiver and a control and evaluating unit, **characterized in that** the light source has beam forming optics mounted downstream of the laser diode and at least approximately illuminating the collimator, so designed that it offsets partial beams emitted from successive segments of the emission edge of laser diode parallel to each other in such a way that their projections onto a plane overlap at least to a large extent, the plane being rotated with respect to the plane formed by the emission edge and the beam direction, the beam forming optics comprising a first deflection element based on diffraction or refraction of light, and a second deflection element based on diffraction or refraction of light, each having an essentially plane surface with structuring, the structuring being divided into at least two fields.
2. Optical telemeter according to claim 1, **characterized in that** laser diode emits with a wavelength between 850 nm and 980 nm.
3. Optical telemeter according to claim 1, **characterized in that** laser diode emits with a wavelength of approximately 1,550 nm.
4. Optical telemeter according to one of claims 1 to 3, **characterized in that** the beam forming optics comprises a cylindrical lens immediately following after the laser diode, the axis of this lens being parallel to the emission edge of the laser diode.
5. Optical telemeter according to claim 4, **characterized in that** the diameter of the cylindrical lens is at most 65 μm .

6. Optical telescope according to claim 4 or 5, **characterized in that** the distance between the emission edge and the cylindrical lens is at most 15 μm .

7. Optical telescope according to one of claims 1 to 6, **characterized in that** the first deflection element so deflects the partial beams in different ways in a direction transverse to the emission edge and also in a direction parallel to it that they strike the second deflection element essentially side by side and the second deflection element orients the partial beams in such a way as if they all issued from a line in a focal plane of the collimator.

8. Optical telescope according to claim 7, **characterized in that** the fields of the first deflection element are oriented parallel to the emission edge and contain different diffraction structures, and that the number of fields of the second deflection element corresponds to the number of fields of the first deflection element, the fields of the second deflection element containing different diffraction structures.

9. Optical telescope according to one of claims 7 to 8, **characterized in that** the beam forming optics comprises a block of transparent material with a first front face to which the first deflection element is fastened and an opposite second front face to which the second deflection element is fastened.

10. Optical telescope according to one of claims 7 to 9, **characterized in that** the first deflection element and the second deflection element consist of plastic.

11. Optical telescope according to claim 9 or 10, **characterized in that** the cylindrical lens is tied to a mount fastened to the first front face of block.

12. Optical telescope according to claim 11, **characterized in that** the first deflection element is integral with mount.

13. Optical telemeter according to claim 11 or 12, **characterized in that** the laser diode is fastened by soldering to block.
14. Optical telemeter according to one of claims 4 to 10, **characterized in that** the cylindrical lens is fastened to the laser diode with cement.
15. Optical telemeter according to one of the preceding claims, **characterized in that** the beam forming optics is designed in such a way that the partial beams are to be superimposed in the far field.
16. Optical telemeter according to one of the preceding claims, **characterized in that** the beam forming optics is designed in such a way that the partial beams in the far field are imaged onto a nearly square field.