

- 1 -

LEAD-FREE 6XXX ALUMINUM ALLOY

This invention relates to the field of aluminum alloys, and more particularly to machinable aluminum alloys. The invention
5 further relates to products made from such alloys, including but not limited to: screw machine stock; cold finished wire, rod and bar; extruded, cast, drawn or hot and cold rolled wire, rod and bar, and extruded, cast, drawn or
10 hot and cold rolled forge stock.

There are several known machining alloys with 2011 and 6262 aluminum (Aluminum Association designations) being among the most commonly sold. It is generally difficult to
15 measure the machinability of any such alloy. One ranking system that has been used for some time classifies machinability based on a letter scale with an "A" rating being most machinable, followed by "B", "C", "D" and "E" ratings taking
20 into account the following characteristics:

(1) Chip Size. Smaller chip sizes are more desired because such chips simplify the machining operation and facilitate more effective heat removal from the tool - workpiece
25 interface than larger chips. Chips must not be too small or they interfere with lubricant recirculation during the overall machining

- 2 -

operation, such as by drilling or cutting. Long, thin chips by contrast tend to curl around themselves rather than break. Such chips, sometimes called curlings, may require manual removal from the machining area and are less effective than smaller chips at heat dissipation because larger chips tend to block the cooling lubricant.

5 (2) Tool Wear. Lower tool wear rates are desired to save money by increasing the amount of time a tool can be used before prescribed tolerances for a given workpiece are exceeded. Lower tool wear rates further increase productivity by reducing downtime due to tool changeovers.

10 (3) Surface Finish. Alloys exhibiting a very smooth exterior surface finish in the as-machined condition are more desired to eliminate or reduce the need for subsequent surface finishing operations, such as grinding and deburring.

15 (4) Machining Forces. Lower machining forces are more desired to: reduce power requirements and the amount of frictional heat generated in the workpiece, tool and tool head; or increase the amount of machining or metal removal that can be accomplished with the same power requirements; and

20 (5) Mechanical and Corrosion Properties. Mechanical characteristics such as strength, or other properties such as corrosion resistance, may be "optional" with respect to machinability. They can also be rather important depending on the intended end use for the workpiece being machined.

35 Although this "A" through "E" rating system is based on the five parameters discussed above,

- 3 -

the relative importance of each parameter changes as a function of intended end use for any given alloy.

Currently, 2011 is the most popular aluminum machining alloy that is consistently "A" rated. This composition contains about 5-6 wt.% Cu, up to about 0.3 wt.% Zn, up to about 0.7 wt.% Fe, up to about 0.4 wt.% Si, about 0.2-0.6 wt.% Bi and about 0.2-0.6 wt.% Pb. 6262 aluminum is most often "B" rated but has consistently higher strength levels and better overall corrosion resistance in the T8 and T9 tempers when compared to its 2011-T3 counterparts. The composition for 6262 aluminum contains about 0.8-1.2 wt.% Mg, about 0.4-0.8 wt.% Si, about 0.15-0.4 wt.% Cu, about 0.4-0.7 wt.% Pb, about 0.4-0.7 wt.% Bi, about 0.04-0.14 wt.% Cr, up to about 0.7 wt.% Fe, up to about 0.25 wt.% Zn, up to about 0.15 wt.% Mn and up to about 0.15 wt.% Ti.

In the near future, it may be desirable to reduce the amount of lead in many products. Legislation may require Pb level reductions or even elimination from certain consumer goods. A lead-free substitute for 2011 and/or 6262 aluminum would be desirable, therefore.

It is of interest to provide a substantially lead-free substitute for 6262 aluminum. Another objective is to provide a lead-free, aluminum alloy with excellent machinability, thereby resulting in reduced manufacturing costs through faster machining times. It is another objective to provide an alloy which can be substituted for 2011 and/or 6262 aluminum in most machining applications, especially those where strength properties for

THIS SHEET HAS BEEN
REPLACED

the finished product are relatively less critical than machinability characteristics.

Also of interest is to provide an improved screw machine stock and wire, rod or bar product, together with improved methods for making such products by casting, preheating, extruding, solution heat treating, cold finishing and thermally processing in various step combinations.

10 In accordance with the present invention, one embodiment pertains to an aluminum alloy suitable for machining. This alloy consists essentially of: about 0.15-1.0 wt.% copper, about 0.4-1.5 wt.% tin, about 0.65-
15 1.35 wt.% magnesium, about 0.4-1.1 wt.% silicon, about 0.002-0.35 wt.% manganese, up to about 0.5 wt.% iron, up to about 0.15 wt.% chromium and up to about 0.15 wt.% titanium, the remainder substantially aluminum and incidental elements
20 and impurities. On a preferred basis, this alloy includes about 0.45-0.7 wt.% copper, about 0.9-1.3 wt.% tin, about 0.7-0.9 wt.% magnesium, about 0.45-0.75 wt.% silicon and about 0.01-0.05 manganese. It is substantially lead-free,
25 bismuth-free, nickel-free, zirconium-free and cadmium-free as defined hereinafter. This alloy is typically processed into screw machine stock or one or more products selected from wire, rod and bar, most preferably by ingot casting and
30 subsequent hot deformation.

There is further disclosed an improved method for making screw machine stock and wire, rod or bar product from this alloy by casting, preheating, extruding, solution heat treating,
35 cold finishing and thermally processing, preferably to a T3, T8 or T851 temper (Aluminum Association designations). By extruding, cold



- 5 -

finishing, and then solution heat treating (or solutionizing), this same alloy may be processed to such other tempers as T4, T451, T6 or T651. T9 tempering is also available by solution heat treating, thermally processing and cold finishing. The alloy of this invention may be: continuously cast using known or subsequently developed means; extruded into various product shapes without cold finishing; or even press quenched. After extrusion, products made from this alloy may be tempered according to T4511, T6510, T6511 or other T6 practices.

For any description of preferred alloy compositions, all references to percentages are by weight percent (wt%) unless otherwise indicated.

When referring to any numerical range of values, such ranges are understood to include each and every number and/or fraction between the stated range minimum and maximum. A range of about 0.4-1.5% tin; for example, would expressly include all intermediate values of about 0.41, 0.42, 0.43 and 0.5%, all the way up to and including 1.45, 1.47 and 1.49% Sn. The same applies to each other elemental range set forth below.

As used herein, the term "substantially-free" means having no significant amount of that component purposefully added to the alloy composition, it being understood that trace amounts of incidental elements and/or impurities may find their way into a desired end product. For example, a substantially lead-free, machining alloy might contain less than about 0.1% Pb, or less than about 0.03% Pb on a more preferred basis, due to contamination from incidental additives or through contact with

- 6 -

certain processing and/or holding equipment. All embodiments of the present invention are substantially Pb-free. The invention alloy is also substantially free of bismuth, nickel,
5 zirconium, cadmium and thallium on a most preferred basis.

The term "screw machine stock", as used herein, describes cold finished wire, rod and bar product together with any extruded wire,
10 rod or bar product which can be hot and cold rolled by conventional ingot metallurgy techniques (e.g., DC casting) or otherwise manufactured using known or subsequently developed powder metallurgy and casting
15 processes. "Cold processing" is defined as working with substantially ambient temperatures while "hot working" uses heated stock for further processing. It is to be understood that, in some instances, cold processing can
20 also follow hot working.

When referring to any preferred tempering treatment for this alloy, including T3, T4, T451, T4511, T6, T651, T6510, T6511, T8, T851 and T9, it is understood that current
25 tempering practices include: hot working; cold working; solution heat treating (or solutionizing); and precipitation hardening, either naturally (i.e., at ambient or room temperature) or artificially (using an external
30 heat source). Particulars about any one tempering method may be learned from Aluminum Association registration guidelines, the disclosures of which are fully incorporated by reference herein.

35 While the aluminum alloy of this invention can be made into screw machine stock and wire, rod or bar product, preferably by

- 7 -

extrusion, casting and/or hot or cold rolling, it is to be understood that the same alloy may be made into other forms and product shapes, including sheet, strip, plate, forgings, clad or foil products, by any known or subsequently developed technique, including continuous or semi-continuous casting.

When referring to the main alloying components of this invention, it is understood that a remainder of substantially aluminum may include some incidental, intentionally added elements which may impact collateral properties of the invention, or unintentionally added impurities, neither of which should change the essential characteristics of this alloy. With respect to the main alloying elements, it is believed that the copper hereof contributes to the alloy's overall machinability, strength, anodizing response, weldability and corrosion resistance response. The presence of tin is believed to contribute to both machinability and artificial aging response. For the lesser elements, chromium is believed to contribute to the formation of fine-dispersoid phases and prevent recrystallization during hot working or heat treatments. Manganese is believed to add to the alloy's strength, recrystallization and abrasion resistance. Silicon is also added for strength while iron is generally present as an impurity.

Tin is considered a viable substitute for lead for several reasons. Sn satisfies a majority of the criteria used to discern and develop a substantially lead-free substitute for 2011 and/or 6262 aluminum, namely: (1) having a low toxicity level; (2) generating minimal processing complications when substituting for

- 8 -

the above aluminum alloys; (3) forming a low melting eutectic; (4) being generally insoluble in solid aluminum; (5) forming substantially no intermetallics with aluminum; and (6) having a net expansion upon melting.

One essential character of the present invention is believed to flow from the effect of melting a tin-magnesium eutectic, typically from the temperature rise in the region of a cutting tool during machining. Consequently, this invention may tolerate small amounts of such other elements as silver to further enhance strength properties without detrimentally affecting the aforementioned essential behavior characteristics. Evidence of this is noted by the inversely proportional relationship observed between Sn and Mg contents for the invention alloy. When a moderate amount of tin is present, Mg levels should be kept comparatively high. But with lower Mg contents, of about 0.9 wt.% or less, Sn contents of 0.95 wt.% or higher prove more beneficial.

The following examples are provided to further illustrate the objectives and advantages of this invention. They are not necessarily intended to limit the scope hereof in any manner.

Table 1a - Compositions

Alloy	Mg	Cu	Mn	Pb	Bi	Sn	Si
Repr. 6262 comp.	0.88	0.34	0.02	0.54	0.50	--	0.59
Invention Sample a	0.66	0.30	0.003	0.0003	--	0.87	0.48
Invention Sample b	0.66	0.59	0.003	0.0009	--	0.95	0.48
Invention Sample c	0.91	0.31	0.003	0.0013	--	0.90	0.68
Invention Sample d	0.88	0.59	0.004	0.0039	--	0.94	0.72
Invention Sample e	0.94	0.63	0.004	0.0033	--	0.89	0.73
Invention Sample f	1.18	0.34	0.003	0.0000	--	0.95	0.87
Invention Sample g	1.17	0.58	0.006	0.0010	--	0.94	0.84
Invention Sample h	1.00	0.56	0.004	0.0035	--	1.10	0.72
Invention Sample i	1.00	0.59	0.010	0.0043	--	0.86	0.72
Invention Sample j	0.75	0.33	0.009	0.0017	--	1.24	0.51
Invention Sample k	0.72	0.59	0.006	0.0019	--	1.25	0.50
Invention Sample l	1.01	0.30	0.004	0.0045	--	1.26	0.71
Invention Sample m	1.01	0.66	0.015	0.0271	--	1.39	0.73
Invention Sample n	1.14	0.32	0.006	0.0062	--	1.24	0.85
Invention Sample o	1.27	0.61	0.005	0.0051	--	1.26	0.95

- 10 -

Table 1b - T8 Tempered

Alloy	Tensile (ksi)	Yield (ksi)	% Elong.	# Chips/g	Tool Life (hrs)
Repr. 6262	51.2	49.3	15.2	165.17	1.28
Invention Sample a	42.57	39.27	16.67	310.67	1.23
Invention Sample b	44.71	41.30	14.72	291.11	1.27
Invention Sample c	47.63	45.38	12.92	123.67	2.79
Invention Sample d	49.12	45.92	14.42	199.33	0.67
Invention Sample e	51.28	48.72	13.83	119.83	1.98
Invention Sample f	54.22	52.20	13.17	172.67	1.65
Invention Sample g	55.65	54.20	9.08	166.50	1.42
Invention Sample h	49.18	47.25	15.50	173.17	1.93
Invention Sample i	52.11	49.94	13.11	146.44	2.40
Invention Sample j	42.50	39.60	15.42	313.00	1.51
Invention Sample k	45.98	42.46	16.00	256.67	0.81
Invention Sample l	45.33	43.17	13.33	235.67	1.90
Invention Sample m	48.35	45.60	13.42	289.33	0.88
Invention Sample n	50.37	48.93	12.00	160.83	2.09
Invention Sample o	55.17	53.47	10.83	163.33	1.87
Invention Average	48.94	46.49	13.63	208.15	1.63

- 11 -

Table 1c - T9 Tempered

Alloy	Tensile (ksi)	Yield (ksi)	% Elong.	# Chips/g	Tool Life (hrs)
Repr. 6262	53.0	51.1	10.0	144.67	1.58
Invention Sample a	49.78	47.82	8.33	281.17	0.90
Invention Sample b	50.85	48.90	8.42	280.83	0.84
Invention Sample c	55.58	53.55	9.92	147.67	2.46
Invention Sample d	57.45	54.92	8.25	190.67	1.51
Invention Sample e	57.10	54.82	8.77	183.00	1.59
Invention Sample f	55.78	53.67	10.83	159.33	1.46
Invention Sample g	59.30	56.65	8.92	194.17	1.76
Invention Sample h	55.82	53.52	8.50	179.00	1.95
Invention Sample i	58.84	55.96	8.44	173.00	1.79
Invention Sample j	49.62	47.58	10.42	265.67	0.78
Invention Sample k	51.66	50.02	7.89	257.44	0.76
Invention Sample l	52.40	50.43	6.50	225.00	1.68
Invention Sample m	55.77	53.77	6.42	253.17	0.84
Invention Sample n	54.55	52.35	8.42	163.17	1.90
Invention Sample o	57.53	55.63	5.83	213.33	0.61
Invention Average	54.80	52.64	8.39	211.11	1.39

- 12 -

From the aforementioned tables, it is noted that a higher chip per gram number equates to more chips and thus smaller sized chips, which in turn indicates better alloy

5 machinability. Using this criterion alone, those invention alloy compositions with lower Mg contents and relatively higher Sn weight percentages, especially Invention Samples b and k, outperformed 6262 aluminum.

10 Having described the presently preferred embodiments, it is to be understood that the invention may be otherwise embodied by the scope of the claims appended hereto.



- 13 -

THIS SHEET HAS BEEN
REPLACEDC L A I M S

1. A lead-free, bismuth-free, nickel-free, zirconium-free and cadmium-free aluminum alloy consisting essentially of: about 0.15-1.0
5 wt.% copper, about 0.4-1.5 wt.% tin, about 0.65-1.35 wt.% magnesium, about 0.4-1.1 wt.% silicon, about 0.002-0.35 wt.% manganese, up to about 0.5 wt.% iron, up to about 0.15 wt.% chromium and up to about 0.15 wt.% titanium, the remainder
10 substantially aluminum.
2. The aluminum alloy of claim 1, which contains about 0.45-0.7 wt.% copper.
3. The aluminum alloy of claim 1, which contains about 0.9-1.3 wt.% tin.
- 15 4. The aluminum alloy of claim 1, which contains about 0.7-0.9 wt.% magnesium.
5. The aluminum alloy of claim 1, which contains about 0.45-0.75 wt.% silicon.
- 20 6. A lead-free, bismuth-free, nickel-free, zirconium-free and cadmium-free, aluminum-based alloy comprising about 0.15-1.0 wt.% copper, about 0.4-1.5 wt.% tin, about 0.65-1.35 wt.% magnesium, about 0.4-1.1 wt.% silicon, about 0.002-0.35 wt.% manganese, up to about 0.5
25 wt.% iron, up to about 0.15 wt.% chromium and up to about 0.15 wt.% titanium, the balance substantially aluminum, incidental elements and impurities.
7. The alloy of claim 6, which contains
30 about 0.45-0.7 wt.% copper.
8. The alloy of claim 6, which contains about 0.9-1.3 wt.% tin.
9. The alloy of claim 6, which contains about 0.7-0.9 wt.% magnesium.
- 35 10. The alloy of claim 6, which contains about 0.45-0.75 wt.% silicon.
11. An A-rated, screw machine stock made

This Sheet Has Been Replaced





- 14 -

THIS SHEET HAS BEEN
REPLACED

from a lead-free, zirconium-free and bismuth-free, aluminum-based alloy consisting essentially of: about 0.15-1.0 wt.% copper, about 0.4-1.5 wt.% tin, about 0.65-1.35 wt.% magnesium, about 0.4-1.1 wt.% silicon, about 0.002-0.35 wt.% manganese, up to about 0.5 wt.% iron, up to about 0.15 wt.% chromium and up to about 0.15 wt.% titanium, the remainder substantially aluminum.

12. The screw machine stock of claim 11, wherein the alloy contains about 0.45-0.7 wt.% copper.

13. The screw machine stock of claim 11, wherein the alloy contains about 0.9-1.3 wt.% tin.

14. The screw machine stock of claim 11, wherein the alloy contains about 0.7-0.9 wt.% magnesium.

15. The screw machine stock of claim 11, wherein the alloy contains about 0.45-0.75 wt.% silicon.

16. The screw machine stock of claim 11, wherein the alloy has been thermally processed to a temper selected from the group consisting of T3, T4, T451, T4511, T6, T651, T6510, T6511, T8, T851 and T9.

17. A product selected from the group consisting of wire, rod and bar, said product made from a lead-free, zirconium-free and bismuth-free, aluminum-based alloy consisting essentially of: about 0.15-1.0 wt.% copper, about 0.4-1.5 wt.% tin, about 0.65-1.35 wt.% magnesium, about 0.4-1.1 wt.% silicon, about 0.002-0.35 wt.% manganese, up to about 0.5 wt.% iron, up to about 0.15 wt.% chromium and up to about 0.15 wt.% titanium, the balance substantially aluminum, incidental elements and

This Sheet Has Been Replaced





- 15 -

impurities.

18. The product of claim 17, wherein the alloy contains about 0.45-0.7 wt.% copper.

19. The product of claim 17, wherein the alloy contains about 0.9-1.3 wt.% tin.

20. The product of claim 17, wherein the alloy contains about 0.7-0.9 wt.% magnesium.

21. The product of claim 17, wherein the alloy contains about 0.45-0.75 wt.% silicon.

22. The product of claim 17, which has been thermally processed to a temper selected from the group consisting of: T3, T4, T451, T4511, T6, T651, T6510, T6511, T8, T851 and T9.

23. The product of claim 17, which was manufactured by a method selected from the group consisting of: extrusion; casting; hot and cold rolling; and combinations thereof.

24. In a method for manufacturing a machinable aluminum-based alloy product selected from the group consisting of: screw machine stock; cold-finished wire, rod or bar; extruded wire, rod or bar; cast wire, rod or bar; and hot and cold-rolled wire, rod or bar, said manufacturing method including casting, preheating, extruding, solution heat treating, and thermally processing an aluminum-based alloy, the improvement which comprises providing as the alloy a lead-free, zirconium-free and bismuth-free composition consisting essentially of: about 0.15-1.0 wt.% copper, about 0.4-1.5 wt.% tin, about 0.65-1.35 wt.% magnesium, about 0.4-1.1 wt.% silicon, about 0.002-0.35 wt.% manganese, up to about 0.5 wt.% iron, up to about 0.15 wt.% chromium and up to about 0.15 wt.% titanium, the balance substantially aluminum, incidental elements and impurities.

25. The improvement of claim 24, wherein

This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED



- 16 -

the alloy contains about 0.45-0.7 wt.% copper.

26. The improvement of claim 24, wherein the alloy contains about 0.9-1.3 wt.% tin.

27. The improvement of claim 24, wherein
5 the alloy contains about 0.7-0.9 wt.% magnesium.

28. The improvement of claim 24, wherein the alloy contains about 0.45-0.75 wt.% silicon.

29. The improvement of claim 24, wherein the alloy is thermally processed to a temper
10 selected from the group consisting of: T3, T4, T451, T4511, T6, T651, T6510, T6511, T8, T851 and T9.

30. In a method of producing a machined aluminum alloy product by casting, extruding,
15 solution heat treating, and thermally processing aluminum alloy stock, the improvement which comprises providing as said aluminum alloy stock, a lead-free, zirconium-free and bismuth-free composition consisting essentially of:
20 about 0.15-1.0 wt.% copper, about 0.4-1.5 wt.% tin, about 0.65-1.35 wt.% magnesium, about 0.4-1.1 wt.% silicon, about 0.002-0.35 wt.% manganese, up to about 0.5 wt.% iron, up to about 0.15 wt.% chromium and up to about 0.15
25 wt.% titanium, the balance substantially aluminum and impurities.

31. The improvement of claim 30, wherein said composition contains about 0.45-0.7 wt.% copper.

30 32. The improvement of claim 30, wherein said composition contains about 0.9-1.3 wt.% tin.

33. The improvement of claim 30, wherein said composition contains about 0.7-0.9 wt.%
35 magnesium.

34. The improvement of claim 30, wherein said composition contains about 0.45-0.75 wt.%

This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED



- 17 -

silicon.

35. The improvement of claim 30, wherein
said stock is thermally processed to a temper
selected from the group consisting of: T3, T4,
5 T451, T4511, T6, T651, T6510, T6511, T8, T851
and T9.

This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED

9610908-7

IPD

- 4 -

the finished product are relatively less critical than machinability characteristics.

Also of interest is to provide an improved screw machine stock and wire, rod or bar product, together with improved methods for making such products by casting, preheating, extruding, solution heat treating, cold finishing and thermally processing in various step combinations.

US-A-5,282,909 and JP-A-63-7354 disclose aluminum-based Si, Cu, Mg, Sn alloys.

In accordance with the present invention, one embodiment pertains to an aluminum alloy suitable for machining. This alloy consists essentially of: about 0.15-1.0 wt.% copper, about 0.4-1.5 wt.% tin, about 0.65-1.35 wt.% magnesium, about 0.4-1.1 wt.% silicon, about 0.002-0.35 wt.% manganese, up to about 0.5 wt.% iron, up to about 0.15 wt.% chromium and up to about 0.15 wt.% titanium, the remainder substantially aluminum and incidental elements and impurities, provided that when copper is below 0.51 wt.%, tin is at least 1.01 wt.%. On a preferred basis, this alloy includes about 0.45-0.7 wt.% copper, about 0.9-1.3 wt.% tin, about 0.7-0.9 wt.% magnesium, about 0.45-0.75 wt.% silicon and about 0.01-0.05 manganese. It is substantially lead-free, bismuth-free, nickel-free, zirconium-free and cadmium-free as defined hereinafter. This alloy is typically processed into screw machine stock or one or more products selected from wire, rod and bar, most preferably by ingot casting and subsequent hot deformation.

There is further disclosed an improved method for making screw machine stock and wire, rod or bar product from this alloy by casting, preheating, extruding, solution heat treating, cold finishing and thermally processing, preferably to a T3, T8 or T851 temper (Aluminum Association designations). By extruding, cold

REPLACEMENT SHEET

03 APR 1999

CLAIMS

1. An aluminum-based alloy with improved machining properties which is substantially free of lead, bismuth, nickel, zirconium and cadmium and comprises 0.15-1.0 wt.% copper, 0.4-1.5 wt.% tin, 0.65-1.35 wt.% magnesium, 0.4-1.1 wt.% silicon, 0.002-0.35 wt.% manganese, up to 0.5 wt.% iron, up to 0.15 wt.% chromium and up to 0.15 wt.% titanium, the balance being substantially aluminum or being substantially aluminum, incidental elements and impurities, provided that when copper is below 0.51 wt.%, tin is at least 1.01 wt.%.
2. An A-rated, screw machine stock made from an aluminum-based alloy which is substantially free of lead, zirconium and bismuth, consisting essentially of 0.15-1.0 wt.% copper, 0.4-1.5 wt.% tin, 0.65-1.35 wt.% magnesium, 0.4-1.1 wt.% silicon, 0.002-0.35 wt.% manganese, up to 0.5 wt.% iron, up to 0.15 wt.% chromium and up to 0.15 wt.% titanium, the remainder substantially aluminum, provided that when copper is below 0.51 wt.%, tin is at least 1.01 wt.%.
3. The screw machine stock of claim 2, wherein the alloy has been thermally processed to a temper selected from the group consisting of T3, T4, T451, T4511, T6, T651, T6510, T6511, T8, T851 and T9.
4. A product selected from the group consisting of wire, rod and bar, said product made from an aluminum-based alloy which is substantially free of lead, zirconium and bismuth and consists essentially of 0.15-1.0 wt.% copper, 0.4-1.5 wt.% tin, 0.65-1.35 wt.% magnesium, 0.4-1.1 wt.% silicon, 0.002-0.35 wt.% manganese, up to 0.5 wt.% iron, up to 0.15 wt.% chromium and up to 0.15 wt.% titanium, the balance substantially aluminum incidental elements and impurities, provided that when copper is below 0.51 wt.%, tin is at least 1.01 wt.%.
5. The product of claim 4, which has been thermally processed to a temper selected from the group consisting of: T3, T4, T451, T4511, T6, T651, T6510, T6511, T8, T851 and T9.
6. The product of claim 4, which was manufactured by a method selected from the group consisting of: extrusion; casting; hot and cold rolling; and combinations thereof.

CASE: US 307.194 BARTGES


REPLACEMENT SHEET

03 APR 1999



* C L M S * 14

7. A method for manufacturing a machinable aluminum-based alloy product selected from the group consisting of: screw machine stock; cold-finished wire, rod or bar; extruded wire, rod or bar; cast wire, rod or bar; and hot and cold-rolled wire, rod or bar, said manufacturing method including casting, preheating, extruding, solution heat treating, and thermally processing an aluminum-based alloy, said method including providing an aluminum-based alloy which is substantially free of lead, zirconium and bismuth and consists essentially of 0.15-1.0 wt.% copper, 0.4-1.5 wt.% tin, 0.65-1.35 wt.% magnesium, 0.4-1.1 wt.% silicon, 0.002-0.35 wt.% manganese, up to 0.5 wt.% iron, up to 0.15 wt.% chromium and up to 0.15 wt.% titanium, the balance substantially aluminum, incidental elements and impurities, provided that when copper is below 0.51 wt.%, tin is at least 1.01 wt.%.
8. A method of producing a machined aluminum alloy product by casting, extruding, solution heat treating, and thermally processing aluminum alloy stock, said method including providing an aluminum-based alloy which is substantially free of lead, zirconium and bismuth and consists essentially of 0.15-1.0 wt.% copper, 0.4-1.5 wt.% tin, 0.65-1.35 wt.% magnesium, 0.4-1.1 wt.% silicon, 0.002-0.35 wt.% manganese, up to 0.5 wt.% iron, up to 0.15 wt.% chromium and up to 0.15 wt.% titanium, the balance substantially aluminum and impurities, provided that when copper is below 0.51 wt.%, tin is at least 1.01 wt.%.
9. A method according to claim 7 or 8, wherein said alloy or said stock is thermally processed to a temper selected from the group consisting of: T3, T4, T451, T4511, T6, T651, T6510, T6511, T8, T851 AND T9.
10. An alloy, screw machine stock, product or method of any of claims 1 to 8, wherein the amounts of components of said alloy are selected from one or more of the following:
- (a) about 0.45-0.7 wt.% copper;
 - (b) about 0.9-1.3 wt.% tin;
 - (c) about 0.7-0.9 wt.% magnesium;
 - (d) about 0.45-0.75 wt.% silicon.

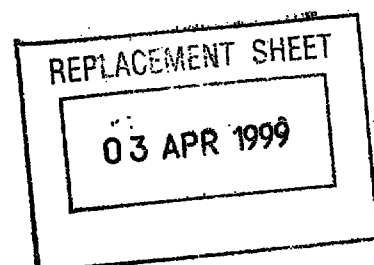

PCTWORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau9610908-7
IP05

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶: C22C 21/02, 21/08, 21/12, 21/14, 21/16, C22F 1/04	A1	(11) International Publication Number: WO 96/08586 (43) International Publication Date: 21 March 1996 (21.03.96)
(21) International Application Number: PCT/US95/11738 (22) International Filing Date: 15 September 1995 (15.09.95) (30) Priority Data: 307,194 16 September 1994 (16.09.94) US (60) Parent Application or Grant (63) Related by Continuation US 307,194 (CON) Filed on 16 September 1994 (16.09.94) (71) Applicant (for all designated States except US): ALUMINUM COMPANY OF AMERICA [US/US]; Alcoa Technical Drive, 100 Technical Drive, Alcoa Center, PA 15069-0001 (US). (72) Inventors; and (75) Inventors/Applicants (for US only): BARTGES, Charles, W. [US/US]; Alcoa Technical Center, 100 Technical Drive, Alcoa Center, PA 15069-0001 (US). KLEMP, Thomas, J. [US/US]; Alcoa Massena Operations, Park Avenue East, Massena, NY 13662 (US). SCOTT, Gerald, D. [US/US]; Alcoa Massena Operations, Park Avenue East, Massena, NY 13662 (US). ALLYN, Matthew, D. [US/US]; Alcoa	Massena Operations, Park Avenue East, Massena, NY 13662 (US). (74) Agents: HANDELMAN, Joseph, H.; Ladas & Parry, 26 West 61st Street, New York, NY 10023 (US) et al. (81) Designated States: AM, AT, AU, BB, BG, BR, BY, CA, CH, CN, CZ, DE, DK, EE, ES, FI, GB, GE, HU, IS, JP, KE, KG, KP, KR, KZ, LK, LR, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, TJ, TM, TT, UA, UG, US, UZ, VN, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG), ARIPO patent (KE, MW, SD, SZ, UG). Published <i>With international search report.</i>	
(54) Title: LEAD-FREE 6XXX ALUMINUM ALLOY		
(57) Abstract An aluminum alloy suitable for machining, said alloy consisting essentially of: about 0.15-1.0 wt.% copper, about 0.4-1.5 wt.% tin, about 0.65-1.35 wt.% magnesium, about 0.4-1.1 wt.% silicon, about 0.002-0.35 wt.% manganese, up to about 0.5 wt.% iron, up to about 0.15 wt.% chromium and up to about 0.15 wt.% titanium, the remainder substantially aluminum. On a preferred basis, this alloy contains about 0.45-0.7 wt.% copper, about 0.9-1.3 wt.% tin, about 0.7-0.9 wt.% magnesium and about 0.45-0.75 wt.% silicon. The alloy is lead-free, bismuth-free, nickel-free, zirconium-free and cadmium-free. There is further disclosed an improved method for making screw machine stock or wire, rod and bar product from this alloy by casting, preheating, extruding, solution heat treating, cold finishing and thermally processing the aforementioned alloy composition.		