

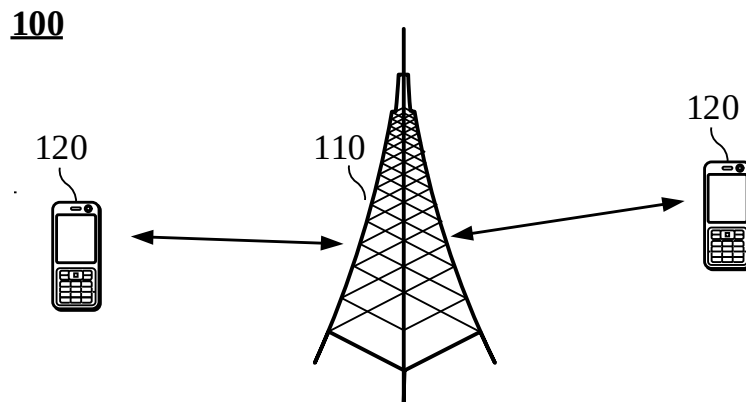


FIG. 1

200

The terminal device determining first uplink control information and a first uplink channel to be transmitted to the network device in a first time unit, wherein the first uplink channel is used to carry other information than the first uplink control information, and transmitting a time domain resource of the first uplink channel includes transmitting at least part of the time domain resources of the first uplink control information

210

The terminal device determining a channel and/or information to be transmitted in the first time unit according to a transmission parameter corresponding to the first uplink control information and a transmission parameter of the first uplink channel

220

FIG. 2

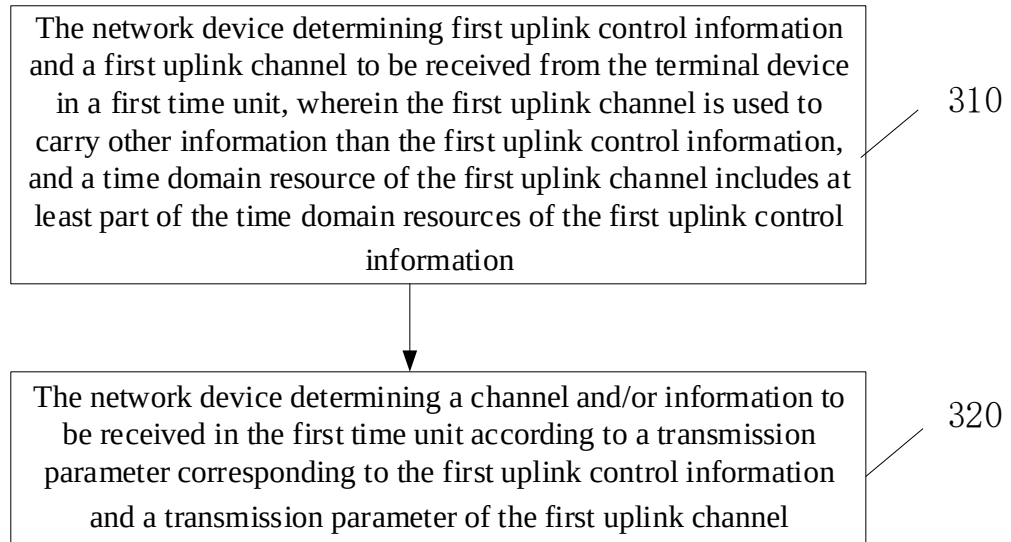
300

FIG. 3

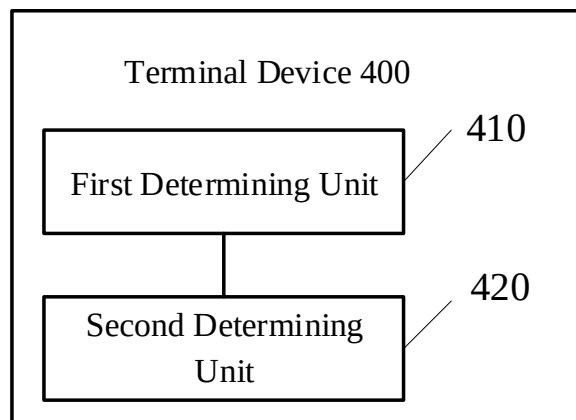


FIG. 4

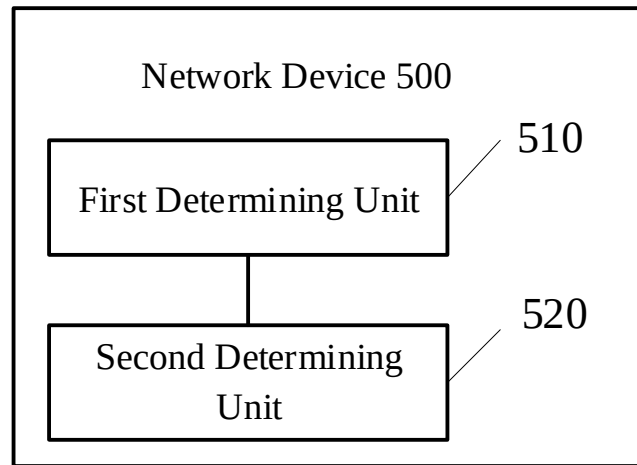


FIG. 5

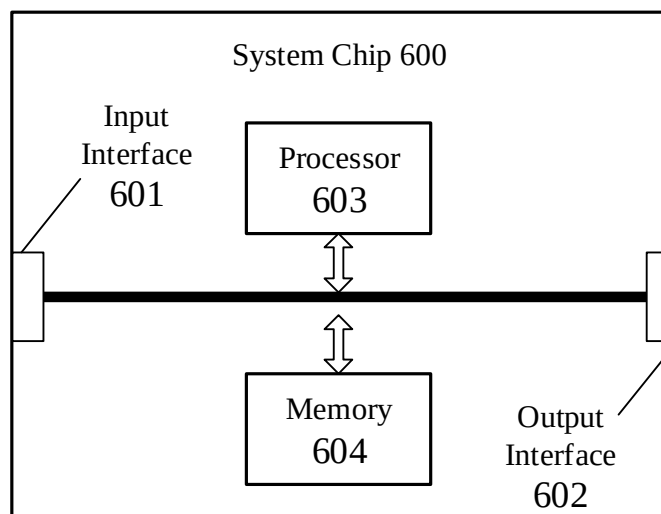


FIG. 6

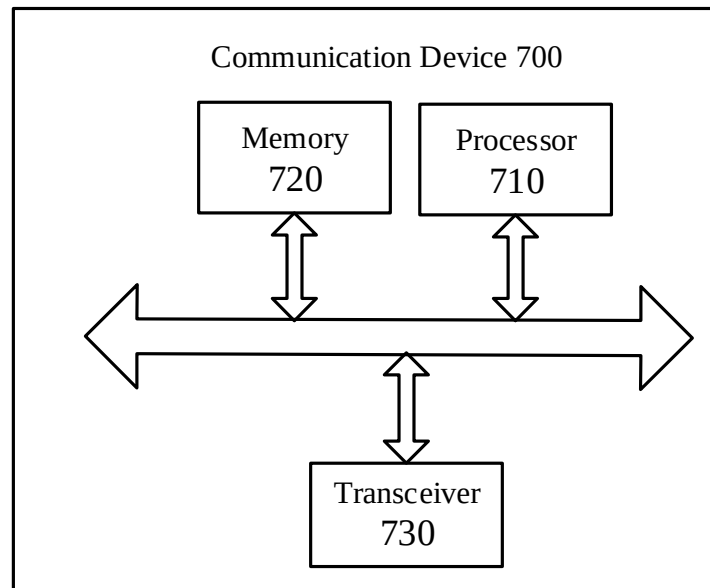


FIG. 7