



(43) International Publication Date
29 August 2013 (29.08.2013)

(51) International Patent Classification:
H04R 25/02 (2006.01)

(21) International Application Number:
PCT/US2013/027248

(22) International Filing Date:
22 February 2013 (22.02.2013)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
AI-02-003 23 February 2012 (23.02.2012) US
61/690,852 3 July 2012 (03.07.2012) US
61/742,419 9 August 2012 (09.08.2012) US

(71) Applicant: ARIA INNOVATIONS, INC. [US/US]; 421
Olive Avenue, Palo Alto, CA 94304 (US).

(72) Inventors: MICHEL, Florent; 5 Rue Du Clos Fleuri, An-
nemasse (FR). MICHEL, Raphael; 421 Olive Avenue,
Palo Alto, CA 94304 (US). SHEN, Danny; 137 Running
Farm Lane #102, Stanford, CA 94305 (US). PERRY, Mi-
chael; 23281 Partridge Lane, Los Altos, CA 94024 (US).

(74) Agent: FRANCIS, Ralph, C.; Francis Law Group, 512
Westline Drive, Suite 301, Alameda, CA 94501 (US).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,
BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM,
DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP,
KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD,
ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI,
NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU,
RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ,
TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA,
ZM, ZW.

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ,
UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ,
TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,
EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,
MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
ML, MR, NE, SN, TD, TG).

Published:

— without international search report and to be republished
upon receipt of that report (Rule 48.2(g))

(54) Title: ADJUSTABLE SECURING MECHANISM FOR A SPACE ACCESS DEVICE

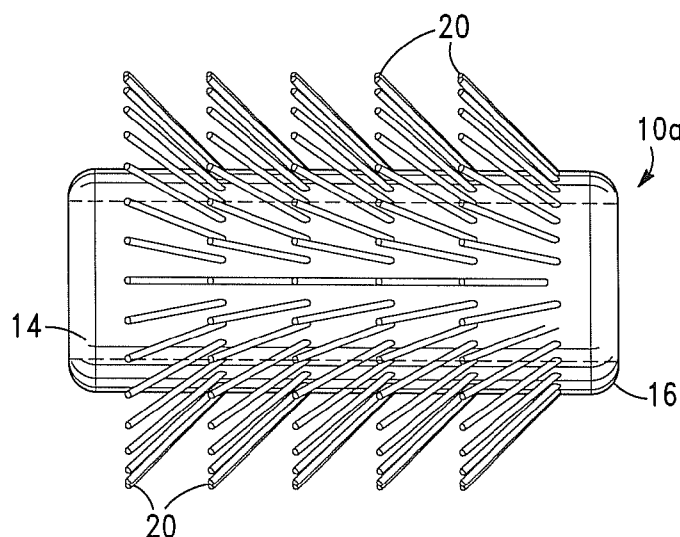


FIG. 1

(57) Abstract: A securing mechanism comprising
a plurality of outwardly projecting members having
a plurality of contact points that are configured to
contact a surface of an opening when disposed on a
space access device that is inserted in the opening,
the securing mechanism being configured to apply
a pressure to a contact surface within the opening
less than approximately 10000 kPa.