



(51) International Patent Classification:

A45C 15/00 (2006.01) B60B 33/00 (2006.01)
A45C 5/14 (2006.01) B60B 37/10 (2006.01)

(21) International Application Number:

PCT/IL2013/050878

(22) International Filing Date:

28 October 2013 (28.10.2013)

(25) Filing Language:

English

(26) Publication Language:

English

(71) Applicant: TRAVEL LIGHT LTD [IL/IL]; 44 Remez street, 6219225 Tel Aviv (IL).

(72) Inventor: Shalgi, Netta; 44/ 7 Remez st., 62192 Tel Aviv (IL).

(74) Agents: DR. EYAL BRESSLER LTD et al.; 11 Tuval St., Lazrom House, 52522 Ramat Gan (IL).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,

HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

— as to the identity of the inventor (Rule 4.17(i))

Published:

— with international search report (Art. 21(3))

(54) Title: WHEELED LUGGAGE CASE

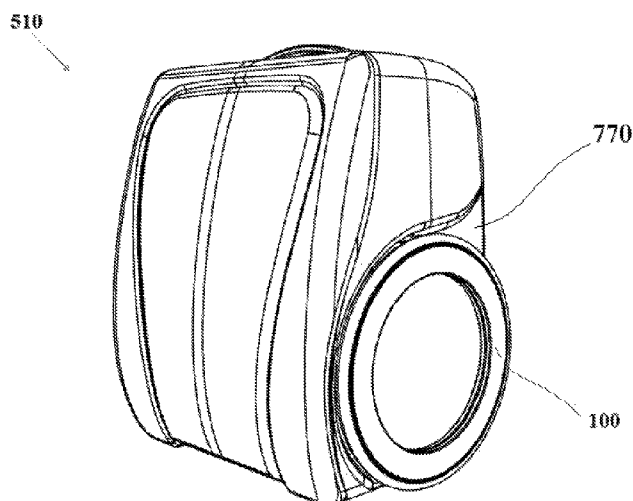


Fig. 1

(57) Abstract: A wheeled luggage case comprises (a) a storage chamber, (b) a cover defining an opening on at least one side of the storage chamber for providing ready access therein and at least two labyrinth axle-free wheels operatively connected to the chamber for towing the case along a ground surface. The labyrinth axle-free wheel comprises an internal rim, an external rim provided with a ground interface, rollers being rotatably disposed within a roller spacer between the internal and external rims in a uniform circumferential manner by means of a spacer and external covers. A labyrinth type dust passage in the wheel is defined by the rims and the external plates mechanically connected to the internal rim.

