

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
10 February 2005 (10.02.2005)

PCT

(10) International Publication Number
WO 2005/013533 A2

(51) International Patent Classification⁷: **H04L**
(21) International Application Number:
PCT/US2004/023559
(22) International Filing Date: 22 July 2004 (22.07.2004)
(25) Filing Language: English
(26) Publication Language: English
(30) Priority Data:
60/491,036 30 July 2003 (30.07.2003) US
(71) Applicant (for all designated States except US): **INTER-DIGITAL TECHNOLOGY CORPORATION** [US/US];
300 Delaware Avenue, Suite 527, Wilmington, Delaware
19801 (US).

(72) Inventors; and
(75) Inventors/Applicants (for US only): **KOO, Chang-Soo**
[US/US]; 15 Zoranne Drive, East Northport, New York
11731 (US). **DENNEAN, Charles** [US/US]; 53 Ver-
mont Street, Melville, New York 11747 (US). **SHIN,**

Sung-Hyuk [US/US]; 104 Eidner Way, Northvale, New
Jersey 07647 (US).


(74) Agent: **BALLARINI, Robert, J.**; United Plaza, Suite
1600, 30 S. 17th Street, Philadelphia, Pennsylvania 19103
(US).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,
KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD,
MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG,
PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM,
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM,
ZW.

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,
ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),

[Continued on next page]

(54) Title: METHOD FOR OUTER LOOP POWER CONTROL TO COMPLY WITH QUALITY REQUIREMENTS OF ALL
TRANSPORT CHANNELS WITHIN A CODED COMPOSITE TRANSPORT CHANNEL

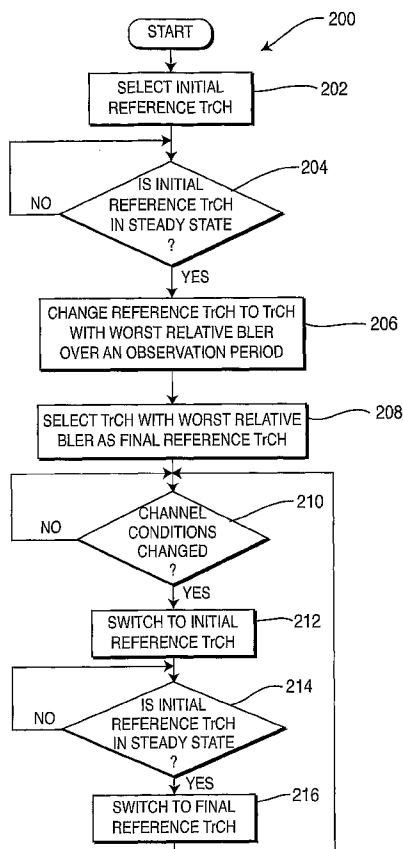

(57) Abstract: A method for performing outer loop power control in a wireless communication system utilizing a plurality of transport channels begins by selecting an initial reference transport channel (TrCH) and a final reference TrCH. Outer loop power control is performed using the initial reference TrCH and then outer loop power control is performed using the final reference TrCH.

WO 2005/013533 A2



European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Published:

- *without international search report and to be republished upon receipt of that report*