




162162



G00002

ABSTRACT

A flame retarded polyolefin resin composition comprises polyolefin resin, 1 to 40 parts by weight per 100 parts of the polyolefin resin of a brominated bisphenol ether derivative of the formula:

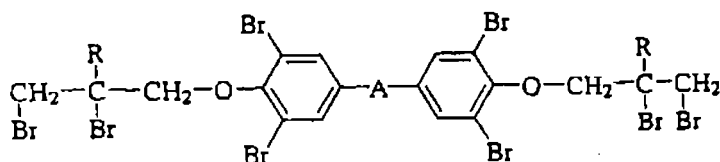

wherein R is hydrogen or methyl, and A is $-\text{C}(\text{CH}_3)_2-$, $-\text{SO}_2-$, $-\text{S}-$, or $-\text{CH}_2-$; and 1 to 30 parts by weight per 100 parts of the polyolefin resin of 2,4,6-tris(mono-, di- or tribromophenoxy)triazine.