

29 APR 2003

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau(43) International Publication Date
23 May 2002 (23.05.2002)

PCT

(10) International Publication Number
WO 02/40425 A1(51) International Patent Classification⁷: C04B 41/63

(21) International Application Number: PCT/EP01/12411

(22) International Filing Date: 25 October 2001 (25.10.2001)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
PD2000A000259
17 November 2000 (17.11.2000) IT(71) Applicant (for all designated States except US): ISOL-
CEM ITALIA S.R.L. [IT/IT]; Via dell'Artigianato, 13,
I-35010 Loreggia (IT).

(72) Inventor; and

(75) Inventor/Applicant (for US only): MASON, Maurizio
[IT/IT]; Via dell'Artigianato, 13, I-35010 Loreggia (IT).(74) Agents: ROBBA, Pierpaolo et al.; Interpatent, Via
Caboto, 35, I-10129 Torino (IT).(81) Designated States (national): AE, AG, AL, AM, AT, AU,
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,
CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH,
GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC,
LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW,
MX, MZ, NO, NZ, PH, PL, PT, RO, RU, SD, SE, SG, SI,
SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU,
ZA, ZW.(84) Designated States (regional): ARIPO patent (GH, GM,
KE, LS, MW, MZ, SD, SI, SZ, TZ, UG, ZW), Eurasian
patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European
patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE,
IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF,
CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD,
TG).

Published:


— with international search report

For two-letter codes and other abbreviations, refer to the "Guid-
ance Notes on Codes and Abbreviations" appearing at the begin-
ning of each regular issue of the PCT Gazette.

(54) Title: WATERPROOFING PASTE



162162

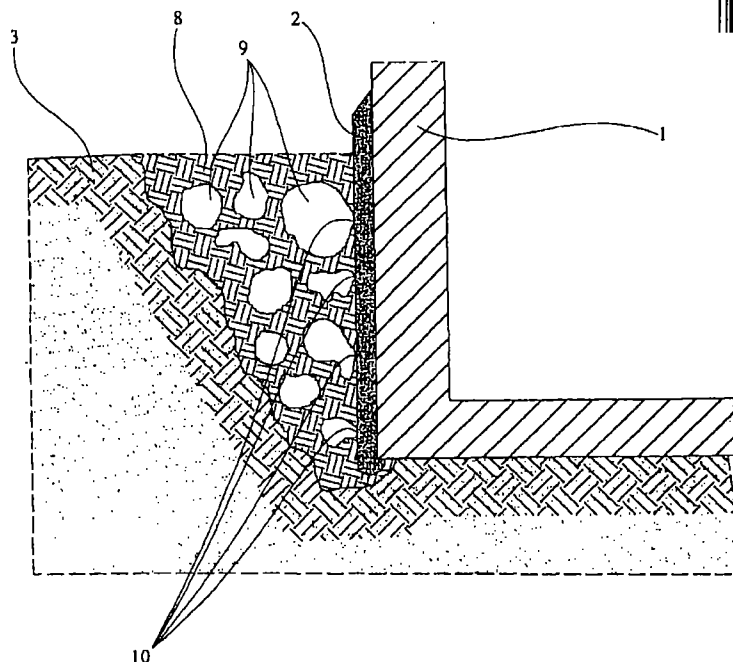

(57) Abstract: The paste is based on air-polymerisable resins (6), generally acrylic resins with an aqueous vehicle, loaded with plastic grains (7). The paste is to be spread in particular on wall surfaces (1) of foundations, to form a waterproofing, protecting and shock-resistant resilient sheath (2). The paste can be applied to certain thickness to get consistency and to undergo no trickling. The paste does not contain any kind of solvent, apart from water, and thus it is ecological.

WO 02/40425 A1



ACTION