

2002 04209-1
(for reference)

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER PATENT COOPERATIVE TREATY
(PCT)

(19) World Organisation For Intellectual Property
International Office



162162

(43) International Publication Date:
July 26 2001 (26.07.2001)

PCT

(10) International Publication No.:
WO 01/53638 A1

(51) International Patent Classification⁷:

E05B 63/00

(74) Agent :

(21) International File No.:

PCT/CH01/00014

(22) International Application Date :

January 9 2001 (09.01.2001)

(25) Filing Language:

German

(26) Publication Language:

German

(30) Priority Data :

130/00 ✓

January 24 2000 (24.01.2000) ✓

CH ✓

(71) Applicant(s) and:

(72) Inventor(s): KELLER, Ernst [CH/CH]; Untere
Schwandenstrasse 22, CH-8805 Richterswil (CH). ✓

(81) Designated States (national): AE, AG, AL, AM, AT, AT (Utility model), AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CR, CU, CZ, CZ (Utility model), DE, DE (Utility model), DK, DK (Utility model), DM, DZ, EE, BE (Utility model), ES, FI, FL (Utility model), GB, GD, GE, GH, GM, HR, 1-lu, ID, IL, IN, IS, JP, KB, KG, KP, KR, KR (Utility model), KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SK (Utility model), SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW


(84) Designated States: (regional): ARIPO Patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian Patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European Patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI Patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

Published

With International search report.

Prior to expiry of period permitted for modification of claims. Publication is repeated in the event of changes.

(54) Title of the Invention : ROTARY LOCKING CYLINDER FOR A SAFETY LOCK

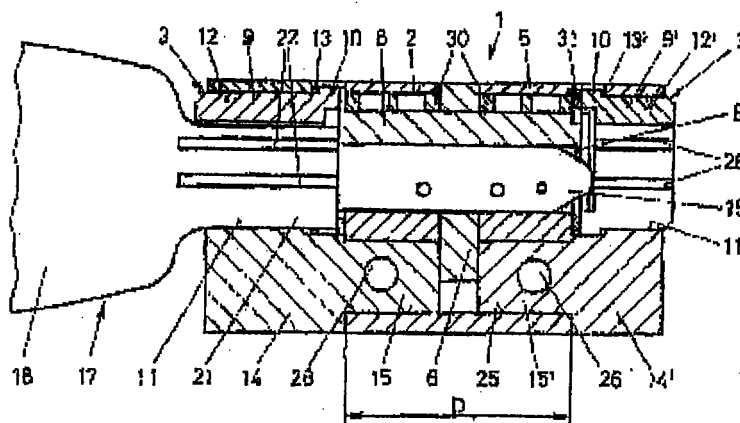

WO 01/53638 A1

(57) Abstract : The rotary locking cylinder comprises a housing (5) and at least one rotor (8) provided with a key channel (27). Tumblers are provided to rotationally release the armature (8) with a key (17) associated therewith. A driver (6) is provided with at least one extension element (3) on the active part (2) of the rotary cylinder. Said extension element comprises a housing (24) and a rotatable insert (9). At least one extension element (3) is arranged on an outer side on the active part (2) at a distance from the driver (6). The key shank is extended in a manner which corresponds substantially to the length (A) of the extension element (3). Preferably, the rotatable insert (9) of the extension element (3) is profiled.



G00002