

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
10 June 2004 (10.06.2004)

PCT

(10) International Publication Number
WO 2004/049402 A2

(51) International Patent Classification⁷: **H01L**
(21) International Application Number:
PCT/US2003/037528

(22) International Filing Date:
24 November 2003 (24.11.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
60/428,402 22 November 2002 (22.11.2002) US

(71) Applicant: **SAINT-GOBAIN CERAMICS & PLASTICS, INC.** [US/US]; One New Bond Street, P.O. Box 15138, Worcester, MA 01615-0138 (US).

(72) Inventors: **KWON, Oh-Hun**; 4 Jacob Jones Way, Westboro, MA 01581 (US). **COUREAU, Christophe**; 22 Royal Crest Drive, Apt. 1, Marlboro, MA 01752 (US). **GORSKI, Richard, A.**; 58 Rugg Road, Sterling, MA 01564 (US). **SIMPSON, Matthew, A.**; 157 Maynard Farm Road, Sudbury, MA 01776 (US).

(74) Agent: **ABEL, Jeffrey, S.**; Toler, Larson & Abel, LLP, 5000 Plaza On The Lake, Suite 265, Austin, TX 78746 (US).


(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (*regional*): ARIPO patent (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:
— *without international search report and to be republished upon receipt of that report*

[Continued on next page]

(54) Title: ZIRCONIA TOUGHENED ALUMINA ESD SAFE CERAMIC COMPOSITION, COMPONENT, AND METHODS FOR MAKING SAME

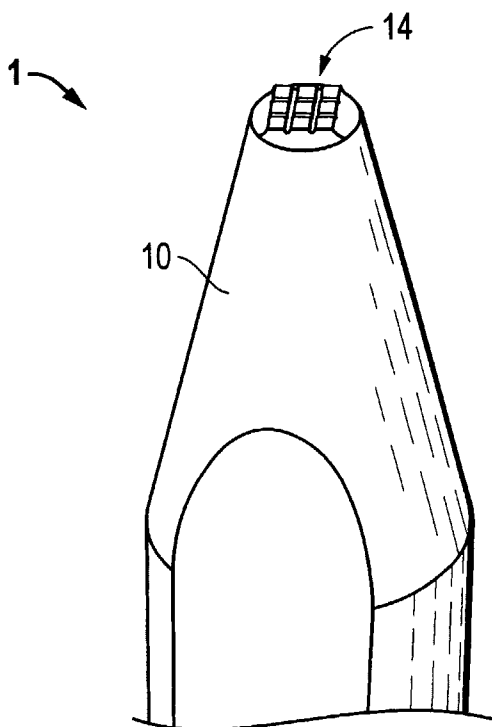

(57) Abstract: ESD safe ceramic component is provided which includes a sintered composition which is formed of a base material and a resistivity modifier. The base material includes a primary component and a secondary component, the primary component including Al_2O_3 and the secondary component including tetragonal- ZrO_2 .

WO 2004/049402 A2



For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.