

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau

(43) International Publication Date
08 February 2018 (08.02.2018)



(10) International Publication Number
WO 2018/026418 A1

(51) International Patent Classification:
F16L 33/22 (2006.01)

(21) International Application Number:
PCT/US2017/033907

(22) International Filing Date:
23 May 2017 (23.05.2017)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
62/370,780 04 August 2016 (04.08.2016) US

(71) Applicant: **EMD MILLIPORE CORPORATION**
[US/US]; 400 Summit Drive, Burlington, Massachusetts
01803 (US).

(72) Inventor: **MORRISSEY, Martin**; c/o EMD Millipore
Corporation, 400 Summit Drive, Burlington, Massachusetts
01803 (US).


(74) Agent: **LEMACK, Kevin, S.** et al.; Nields, Lemack &
Frame, LLC, 176 E. Main Street, Suite 5, Westboro, Mass-
achusetts 01581 (US).

(81) Designated States (*unless otherwise indicated, for every
kind of national protection available*): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ,
CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO,
DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN,
HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KH, KN, KP, KR,
KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG,
MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM,
PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC,
SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR,
TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (*unless otherwise indicated, for every
kind of regional protection available*): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ,
UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ,
TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,
EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,
MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,

(54) Title: HOSE CLAMP

FIG. 1

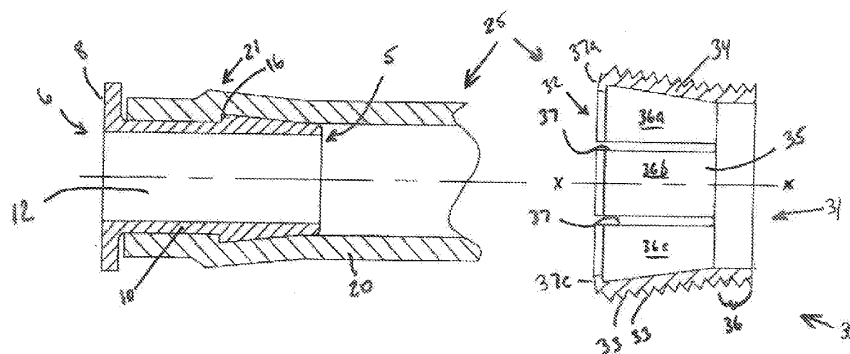

(57) Abstract: A clamp device for a barb member having a barbed region for disposing within an end of a flexible tube having an outer surface. The clamp device includes a flexible member including a body having a plurality of finger members compressible between a first resting position and a second clamping position; at least one of the flexible finger members having a radially inwardly extending tooth; the body having a through bore and an outer surface comprising threads; the flexible member being slidable over the barbed region and the outer surface of the flexible tube; a compression member having a body having a through bore and an inner surface including threads; the compression member being slidable over the flexible member; wherein upon threadingly engaging the compression member with the flexible member, the compression member compresses the finger member against the barb member.

[Continued on next page]

TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))