

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
22 December 2005 (22.12.2005)

PCT

(10) International Publication Number
WO 2005/121685 A1

(51) International Patent Classification⁷: **F28F 27/02**,
F28D 9/00, 1/03

(21) International Application Number:
PCT/NO2005/000207

(22) International Filing Date: 14 June 2005 (14.06.2005)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
20042479 14 June 2004 (14.06.2004) NO

(71) Applicant (for all designated States except US): **INSTITUTT FOR ENERGITEKNIKK** [NO/NO]; Instituttveien 18, N-2007 Kjeller (NO).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **RISBERG, Tove** [NO/NO]; Asbjornsensvei 28, N-1476 Rasta (NO). **NORDTVEDT, Stein Rune** [NO/NO]; Hegermannsgate

12, N-0478 Oslo (NO). **GRANDUM, Svein** [NO/NO]; Royal Norwegian Embassy, 5-12-2 Minami Azabu, Minato-ku, N-106-0047 Tokyo (NO). **HORNTVEDT, Bjarne** [NO/NO]; Gamle Herregårdsvei 11, N-1168 Oslo (NO).


(74) Agent: **OSLO PATENTKONTOR AS**; P.O. Box 7007M, N-0306 Oslo (NO).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),

[Continued on next page]

(54) Title: INLET ARRANGEMENT FOR A PLATE HEAT EXCHANGER

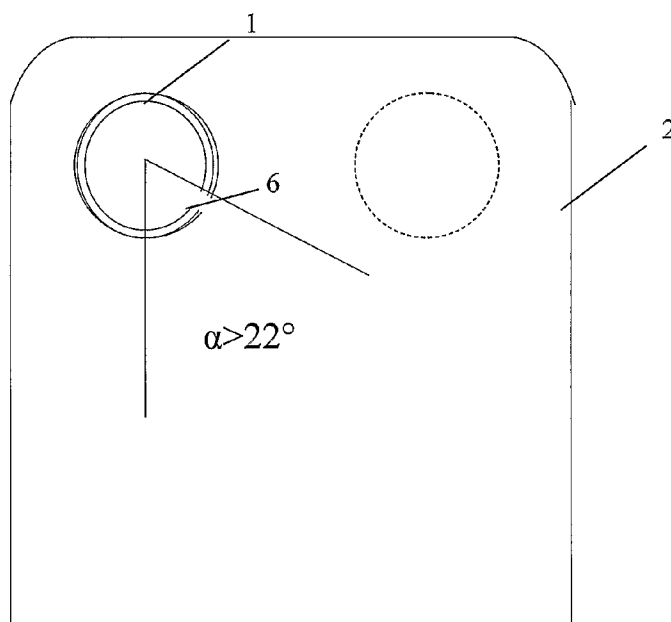

(57) Abstract: An inlet arrangement (1) for use in plate heat exchangers (2) is disclosed. The arrangement comprises an element with a dispersion opening (6) for arrangement in an inlet (5) in a plate exchanger. The inlet arrangement (1) is arranged to form a mainly fitting cylinder wall when introduced in the inlet (5). The cylinder wall comprises at least one opening (6) which extends partly or fully along the length of the inlet (5) and is sealingly arranged towards the inlet (5) of the plate heat exchanger. Furthermore, the opening (6) is oriented towards one side at an angle from the perpendicular. The use of such inlet arrangement (1) is also disclosed.

WO 2005/121685 A1



European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

— *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments*

Published:

— *with international search report*

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.