



ABSTRACT

CAST RESIN FOR OPTICAL USE


A cast resin for optical use is obtained by polymerizing 40 to 89 wt% of a diallyl phthalate component represented by the formula (I)




wherein $-\text{R}_1$ is a hydrogen atom or a methyl group, $-\text{OR}_2$ is a dihydric alcohol residue having 1 to 5 carbon atoms and m is an integer of from 0 to 20, 10 to 59 wt% of an alkylene glycol bis-allyl carbonate component represented by the formula (II)



wherein $-\text{R}_4$ is a hydrogen atom or a methyl group, $-\text{OR}_3$ is a dihydric alcohol residue having 1 to 10 carbon atoms and n is an integer of from 0 to 10, and 1 to 30 wt% of a vinyl compound represented by the formula (III)

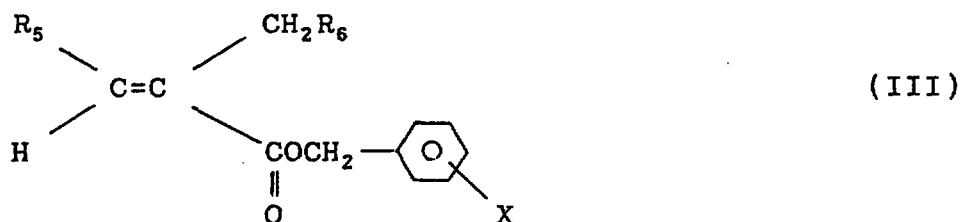

wherein $-\text{R}_5$ and $-\text{R}_6$ stand for a hydrogen atom or a group



wherein X and Y each indicate a hydrogen atom or a halogen atom other than a fluorine atom.