

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
25 March 2004 (25.03.2004)

PCT

(10) International Publication Number
WO 2004/025042 A3

(51) International Patent Classification⁷: **B21D 39/00**,
F16L 23/00, E21B 29/12

(21) International Application Number:
PCT/US2003/029222

(22) International Filing Date:
15 September 2003 (15.09.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
60/410,369 13 September 2002 (13.09.2002) US

(71) Applicant (for all designated States except US): **DRIL-
QUIP, INC.** [US/US]; 13550 Hempstead Highway, Hous-
ton, TX 77040 (US).

(71) Applicant and

(72) Inventor: **REIMERT, Larry, E.** [US/US]; 6 Winner's
Circle, Houston, TX 77024 (US).

(74) Agent: **BRYSON, Alan, C.**; Browning Bushman, P.C.,
5718 Westheimer, Suite 1800, Houston, TX 77057 (US).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU,
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,
CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE,
GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR,
KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK,
MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT,
RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR,
TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (*regional*): ARIPO patent (GH, GM,
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,
ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO,
SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM,
GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).


Published:

- with international search report
- before the expiration of the time limit for amending the
claims and to be republished in the event of receipt of
amendments

(88) Date of publication of the international search report:
6 May 2004

[Continued on next page]

(54) Title: METHOD OF INSTALLING ADJUSTABLE FLANGE ON TUBE

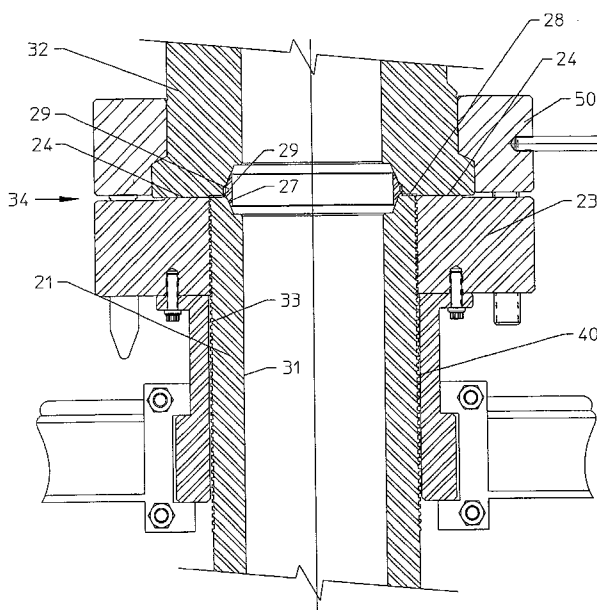

(57) **Abstract:** A method is disclosed of connecting first and second bodies (21, 23) in a mechanical assembly at a desired connection location (34). An elongate connection structure (40) is provided on the first body (21). The first body is installed, extending at least to the desired connection location (34). The first body is axially reduced, to terminate around the desired axial connection location. A second body (23) is connected relative to the desired connection location to the first body using the connection structure. Further subassemblies (32) may be installed, and electrically insulated from other parts of the mechanical assembly to protect against corrosion.

WO 2004/025042 A3



For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.