(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

CORRECTED VERSION

(19) World Intellectual Property Organization
International Bureau

(43) International Publication Date
18 March 2004 (18.03.2004)

PCT

(10) International Publication Number
WO 2004/023374 A1

(51) International Patent Classification[7]: G06F 19/00

(21) International Application Number:
PCT/US2003/027741

(22) International Filing Date:
5 September 2003 (05.09.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
60/408,618 6 September 2002 (06.09.2002) US

(71) Applicant: **QUARTER LAMBDA TECHNOLOGIES, INC.** [US/US]; 1784 La Costa Meadow Drive, Suite 103, San Marcos, CA 92069 (US).

(72) Inventors: **LEGERTON, Jerome**; 874 Harbor View Place, San Diego, CA 92106 (US). **CHEN, Barry**; 8578 Burr Lane, San Diego, CA 92129 (US). **DAHI, Ali**; 1920 Swallow Lane, Carlsbad, CA 92009 (US).

(74) Agent: **MARTINEZ, Peter, R.**; Luce, Forward, Hamilton & Scripps, 11988 El Camino Real, Suite 200, San Diego, CA 92130 (US).

(81) Designated States *(national)*: AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States *(regional)*: ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).


Published:
— *with international search report*

(48) Date of publication of this corrected version:
29 April 2004

(15) Information about Correction:
see PCT Gazette No. 18/2004 of 29 April 2004, Section II

[Continued on next page]

(54) Title: HYBRID CONTACT LENS SYSTEM AND METHOD

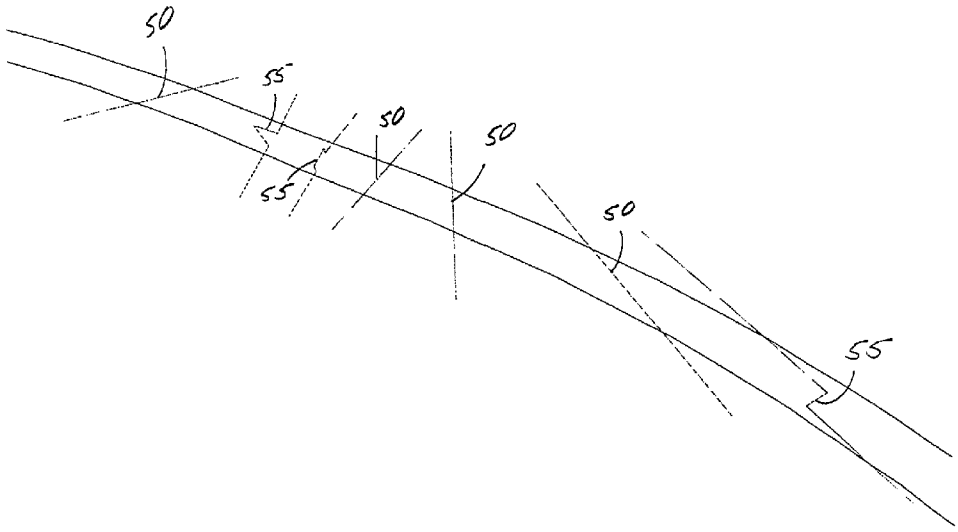

(57) Abstract: In this embodiment of the present invention, increasing the surface area between the rigid and soft leans components increases bonding strength between the two materials and minimizes leans breakage, or failure. Another advantage of this embodiment is that it provides a smooth transition between the rigid or hard, and soft materials. An interface, or junction (75) between the hard, or substantially rigid lens material (65), and the soft lens material (70) is illustrated.

WO 2004/023374 A1

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.