(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau

162162

(43) International Publication Date
28 December 2000 (28.12.2000)

PCT

(10) International Publication Number
WO 00/78135 A2

(51) International Patent Classification[7]: A01L 9/00

(21) International Application Number: PCT/US00/16585

(22) International Filing Date: 16 June 2000 (16.06.2000)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
09/335,370 17 June 1999 (17.06.1999) US
09/579,409 25 May 2000 (25.05.2000) US

(71) Applicant: S.C. JOHNSON & SON, INC. [US/US]; 1525 Howe Street, Racine, WI 53403 (US).

(72) Inventors: SOLLER, Douglas, A.; 2729 Chapel Lane, Racine, WI 53406 (US). FRYAN, Michael, C.; 5205 Coachlamp Drive, Racine, WI 53406 (US). LEONARD, Stephen, B.; 8629 Talamasca Drive, Franksville, WI 53126 (US). DEMAREST, Scott, W.; 7607 West River Road, Racine, WI 53108 (US). MINEAU, Steven, B.; 5436 Center Lane, Waterford, WI 53185 (US). FURNER, Paul, E.; 2400 Orion Court, Racine, WI 53406 (US). SHANKLIN, Donald, J.; 1652 North Mountain View, Fullerton, CA 92831 (US).

(74) Agents: HOUSER, David, J. et al.; S. C. Johnson & Son, Inc., Patent Section, 1525 Howe Street, Racine, WI 53403 (US)

(81) Designated States *(national)*: AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, DE, DK, DM, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZW.

(84) Designated States *(regional)*: ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: HEATED VOLATILE DISPENSER

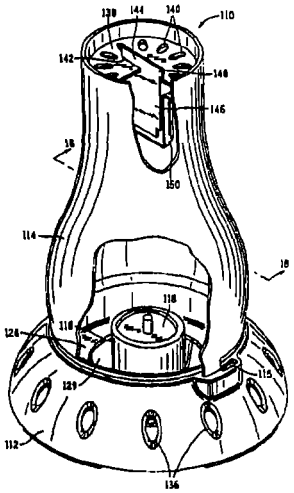

(57) Abstract: A heated volatile dispenser and a volatile carrier for use therewith are disclosed. The volatile dispenser has a closed heating chamber having ceiling and exit vents. A fuel burner is contained within the heating chamber, and a carrier holder is positioned over the fuel burner. The carrier holder holds a volatile carrier in a location above the fuel burner such that hot gases from the fuel burner pass the carrier holder and directly heat a volatile carrier held thereby. The volatile carrier may be held in an edge-on orientation with respect to the flow of hot gases, or transversely with respect to them. The volatile carrier has an inward end that has a cross-sectional profile made to be complementary to that of an insert slot through which the volatile carrier must be inserted for use. An alternative embodiment is shown that uses a candle as a fuel burner. A kit is shown that includes a candle and a volatile carrier that are designed to be exhausted at the same time so that the candle's consumption serves as a use-cue for the volatile carrier. Methods of dispensing volatiles are disclosed.

G00001

WO 00/78135 A2