



- (51) **International Patent Classification:**  
*B66C 23/06* (2006.01) *B66C 23/52* (2006.01)
- (21) **International Application Number:**  
PCT/NO2011/000114
- (22) **International Filing Date:**  
31 March 2011 (31.03.2011)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:**  
2010 0478 31 March 2010 (31.03.2010) NO
- (71) **Applicant** (for all designated States except US): **ROLLS-ROYCE MARINE AS** [NO/NO]; Deck Machinery, Brattvåg, P.O. Box 1522, N-6025 Ålesund (NO).
- (72) **Inventors; and**
- (75) **Inventors/Applicants** (for US only): **SALTHAMMER, Jørn** [NO/NO]; Vorpeneset, N-6390 Vestnes (NO). **MYKLEBUST, Yngve, Bøe** [NO/NO]; Pålplassvegen 8, N-6416 Molde (NO).
- (74) **Agents:** **ONSAGERS AS** et al.; P.O. Box 6963 St. Olavs plass, N-0130 Oslo (NO).
- (81) **Designated States** (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM,

AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

- (84) **Designated States** (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

**Declarations under Rule 4.17:**


- as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii))

**Published:**

- with international search report (Art. 21(3))

[Continued on next page]

(54) **Title:** LIFTING FRAME DEVICE

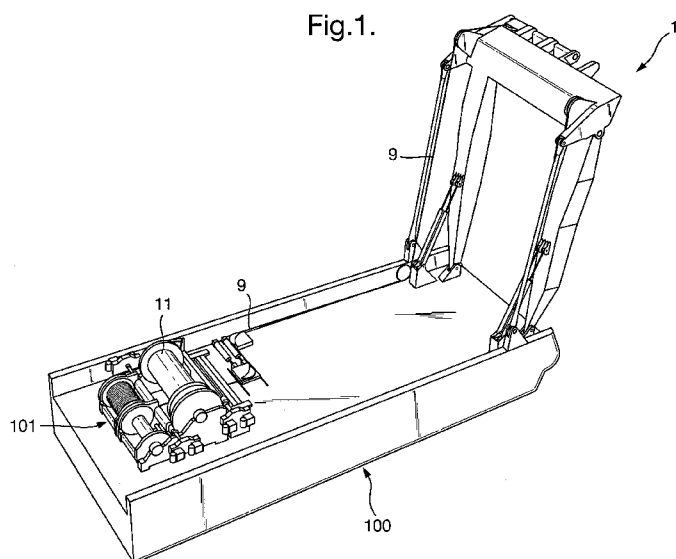

(57) **Abstract:** The present invention relates to a lifting device (1) for handling and/or moving loads, the lifting device comprising two vertical booms (2) which via one of their ends are pivotally connected to a base and via their opposite end are pivotally connected to a horizontal beam (3), forming a frame for the lifting device (1), wherein at least one cylinder (5) is connected to each of or one of the vertical booms (2), so as to be able to turn the lifting device (1) around the pivot point. The horizontal beam (3) is further pivotally connected to at least one tension rod (6). The vertical booms (2), the tension rods (6) and the horizontal beam (3) will then be pivotal in relation to each other. By means of the present invention, a less torque-critical lifting device is provided, as the vertical booms (3), when handling and/or moving a load, will take up compressive forces, whilst the tension rods (6) will take up tensile forces.



— *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))*

(88) **Date of publication of the international search report:**  
5 April 2012