



(43) International Publication Date
16 October 2014 (16.10.2014)

- (51) International Patent Classification:
E01F 8/00 (2006.01) *E04H 17/14* (2006.01)
- (21) International Application Number:
PCT/CN2014/075173
- (22) International Filing Date:
11 April 2014 (11.04.2014)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
61/811,137 12 April 2013 (12.04.2013) US
61/931,693 27 January 2014 (27.01.2014) US
- (71) Applicant: **LO, Wai Yu** [CN/CN]; Unit 601, Block A, Shatin Industrial Centre, Yuen Shun Circuit, Shatin, Hong Kong (CN).
- (72) Inventor: **HO, Wai Lun**; Unit 601, Block A, Shatin Industrial Centre, Yuen Shun Circuit, Shatin, Hong Kong (CN).
- (74) Agent: **CHINA SINDA INTELLECTUAL PROPERTY LTD.**; B11th Floor, Focus Place, 19 Financial Street, Xicheng District, Beijing 100033 (CN).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: A NOISE BARRIER AND A METHOD OF COSTRUCTION THEREOF

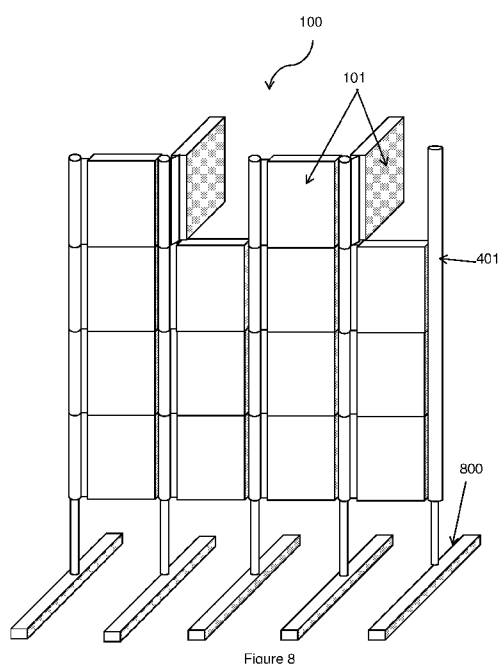


Figure 8

(57) Abstract: A noise barrier is described having noise barrier panels capable of being moved by the force of wind from a closed to an open position to allow passage of wind, so that the noise barrier has limited wind load. The noise barrier can be light weight because wind load on the noise barrier is limited. This provides that the noise barrier is easy to erect, possibly without requiring heavy machinery. The noise barrier panel is mounted on a mounting pole to be slide-able on the mounting pole, so that the noise barrier panel can be pushed from ground up.