PCT WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 7 : G06K 7/00	A1	(11) International Publication Number: WO 00/17806
		(43) International Publication Date: 30 March 2000 (30.03.00)

(21) International Application Number: PCT/EP99/06888

(22) International Filing Date: 17 September 1999 (17.09.99)

(30) Priority Data:
98/11790 22 September 1998 (22.09.98) FR

(71) Applicant *(for all designated States except US)*: ITT MANUFACTURING ENTERPRISES, INC. [US/US]; 1105 North Market Street, Wilmington, DE 19801 (US).

(72) Inventors; and
(75) Inventors/Applicants *(for US only)*: BRICAUD, Hervé [FR/FR]; 166, avenue Eisenhower, F-39100 Dole (FR). PIZARD, Yves [FR/FR]; 106, avenue Georges Pompidou, F-39100 Dole (FR).

(74) Agent: KOHN, Philippe; Cabinet Philippe Kohn, 30, rue Hoche, F-93500 Pantin (FR).

(81) Designated States: CA, CN, JP, SG, US, European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).

Published
With international search report.

(54) Title: ELECTRICAL CONNECTOR FOR THE SIMULTANEOUS CONNECTION OF TWO ELECTRONIC-MEMORY CARDS

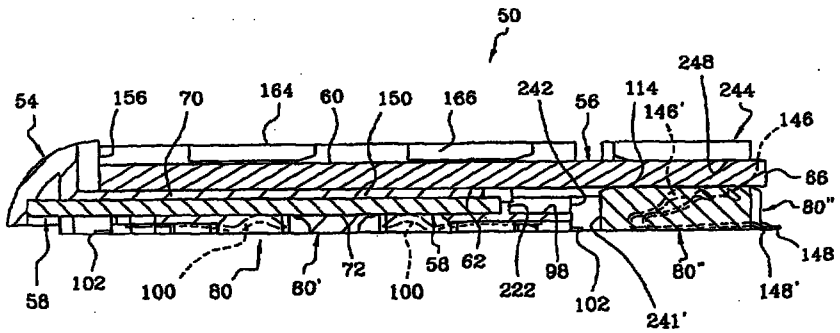

(57) Abstract

The invention provides an electrical connector (50) for the connection of at least two cards (56, 58) which include an upper card (56), of the type having a connector body (80) and a card-holder charger (54) which includes an upper compartment of receiving the upper card (56) and which is mounted so as to be able to move, by longitudinal sliding, between an out position, in which each card may be put into its compartment, and an operating position, in which the contact pads on each card (56, 58) engage with associated electrical-contact elements (100, 146) on the connector body, characterized in that the card-holder charger (54) includes a lower compartment for receiving a contact-type smart card (58) in that, in the operating position, the contact pads on the lower card (58) engage with associated electrical-contact elements (146) on the connector body and in that means are provided for positioning each card (56, 58) with respect to the card-holder charger (54) and for placing the charger (54) in the operating position.