PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 6 : E05F 17/02

A1

(11) International Publication Number: WO 99/29994

(43) International Publication Date: 17 June 1999 (17.06.99)

(21) International Application Number: PCT/US98/24031

(22) International Filing Date: 11 November 1998 (11.11.98)

(30) Priority Data:
08/987,566 11 December 1997 (11.12.97) US

(71) Applicant: SOUTHCO, INC. [US/US]; 210 North Brinton Lake Road, Concordville, PA 19331 (US).


(72) Inventors: KUREK, Edward, A.; 218 Crystal Circle, Birdsboro, PA 19508 (US). SCHLACK, Richard, E.; 1100 Calvert Road, Rising Sun, Cecil County, MD 21911 (US).

(74) Agents: GREENE, Gary, A. et al.; Paul & Paul, 2900 Two Thousand Market Street, Philadelphia, PA 19103 (US).

(81) Designated States: AT, AU, BR, CA, CH, CN, CZ, DE, DK, ES, FI, GB, HU, ID, IL, JP, KR, LU, MX, NO, NZ, PL, PT, RU, SE, SG, SI, TR, UA, European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).

Published
With international search report.

(54) Title: ONE–PIECE CATCH

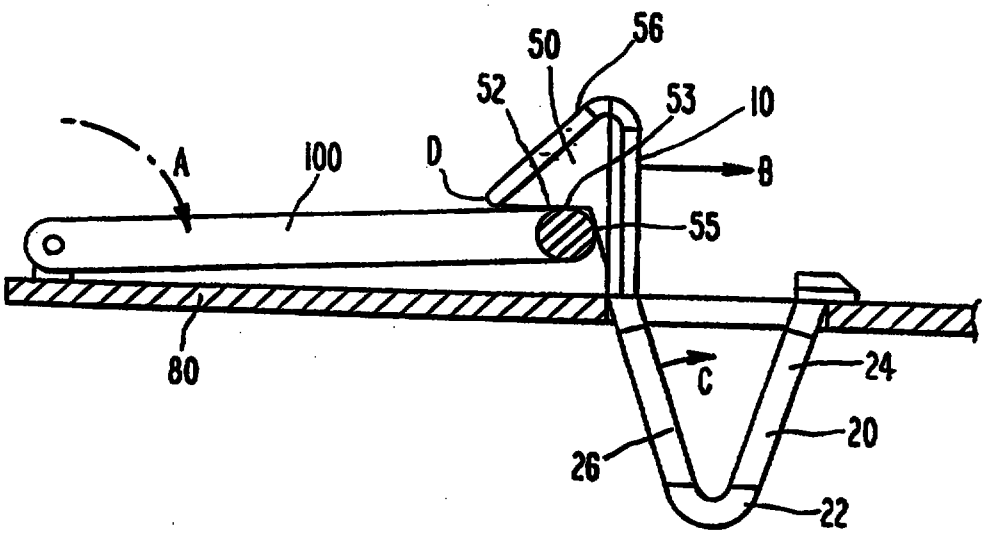

(57) Abstract

A one–piece catch (10) for installation on a panel (80) having a front side and a rear side, for holding a folding handle (100) in a folded position to the front side of the panel (80), or an other article in place, including a panel attachment (20) for installing the one–piece catch (10) on the panel (80) by inserting the one piece–catch (10) through the panel (80) and rotating the catch (10) ninety degrees to seat the catch (10) in position, and a releasable pawl (50) formed integral to the panel attachment (20) having a head section with a camming surface (56) adapted to contact the handle (100) as the handle (100) is folded to the folded position, the handle (100) moving the pawl (50) back to force the pawl (50) away from the handle as the handle is latched to the one–piece catch, the pawl (50) springing forward as the handle (100) passes over the camming surface (56) to seat the handle under the pawl, the handle releasable from the pawl by the application of pressure to the pawl away from the handle.