



(51) International Patent Classification:
B62D 55/125 (2006.01) *B60T 1/00* (2006.01)
B60K 7/00 (2006.01)

(21) International Application Number:
PCT/SE2022/050285

(22) International Filing Date:
24 March 2022 (24.03.2022)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
2150357-8 25 March 2021 (25.03.2021) SE

(71) Applicant: **BAE SYSTEMS HÄGGLUNDS AKTIEBO-
LAG** [SE/SE]; 891 82 Örnsköldsvik (SE).

(72) Inventors: **THORÉN, Max**; Tjärn 117, 891 92 Örnsköldsvik (SE). **HELLHOLM, Björn**; Sjöbodvägen 115, 891 96 Arnäsfall (SE). **BYBERG, Filip**; Johannelundsvägen 27, Lgh 1104, 587 24 Linköping (SE).

(74) Agent: **ZACCO SWEDEN AB**; P.O. Box 5581, Valhallavägen 117N, 114 85 Stockholm (SE).

(81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, IT, JM, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, ST, SV, SY, TH, TJ, TM,

(54) Title: TRACK ASSEMBLY FOR A TRACKED VEHICLE

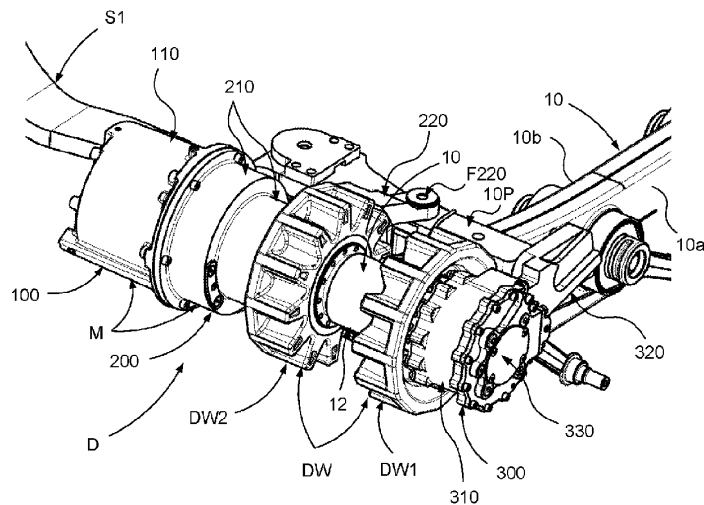


Fig. 5

(57) Abstract: The invention relates to a track assembly (T1, T2) for a tracked vehicle (V). Said track assembly comprises a track support beam (10) configured to support road wheels (RW), a drive wheel member (DW), and a drive arrangement (D) for drive wheel member operation and an endless track (E) disposed around said road wheels (RW) and drive wheel member (DW). Said drive arrangement (D) comprises a brake arrangement (300) for braking the drive wheel member (DW), and a drive axle (40) coaxially arranged relative to a centre axis (Z) of said drive wheel member (DW) for rotating said drive wheel member (DW). Said brake arrangement (300) is configured to be journaled in bearings in connection to a portion of the drive axle (40). Said brake arrangement (300) comprises a torque arm (320) configured to be connected to said track support beam (10) so as to essentially prevent rotation of a brake housing (310) of said brake arrangement (300) about said centre axis (Z).

[Continued on next page]

TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, WS, ZA, ZM, ZW.

(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))