

Title: METHOD AND APPARATUS FOR RECOVERING WATER
 FROM A SEWER MAIN

FIELD OF THE INVENTION

The present invention relates to a process and apparatus for recovering water from raw sewage extracted directly from a sewer main.

The invention has been developed primarily for producing water of industrial and agricultural use quality level and will be described with reference to this application. However, it should be appreciated that the invention may be adapted to provide a potable water supply.

BACKGROUND OF THE INVENTION

Various processes and systems have been proposed for recovering water from sewer mains. However, in view of the high levels of organic matter in sewage, such systems have always previously included a

settlement process, more usually as part of, or in conjunction with, some form of biological digestion process.

Some of these prior art systems have included an anaerobic processing stage which generally requires the slurry to be stored in a holding tank or chamber without oxygenation. Similarly, the preferred aerobic treatment often used in these systems is the activated sludge process which again necessitates storing the slurry in some form of tank arrangement. Air is then injected into the slurry by various means to promote biological digestion by aerobic bacteria.

After the biological treatment, the resulting effluent of the prior art is further treated in various known manners including processes such as chemical coagulation and flocculation, multi-media sand filtration, and chlorination, etc.

Systems of the kind referred to above have several disadvantages. Firstly, the inclusion of any form of settlement or holding tank will not only potentially increase the processing time, it immediately makes the system bulky and cumbersome, thereby placing restrictions on where and how the treatment plant is located. Furthermore, odour control problems are often encountered when using such systems.

Where long residence time biological treatment

stages are included, there is the additional disadvantage of needing to keep the system operating at all times so as to preserve the growth of bacteria required for the various biological processes to work effectively. With activated sludge systems, this means that the expense associated with injecting air and operating these systems must still be incurred even when additional water is not required, such as during periods of heavy rain.

It is an object of the present invention to provide a process and apparatus for recovering water from raw sewage extracted from a sewer, that overcomes or at least ameliorates one or more of the above discussed disadvantages of the prior art.

DISCLOSURE OF THE INVENTION

According to a first aspect of the invention there is provided a process of recovering water from raw sewage extracted directly from a sewer, said process comprising the steps of:

screening the raw sewage to obtain screened effluent having a maximum particle size of no more than approximately 900 microns; and

filtering some or all of the screened effluent through a first membrane separation stage for the removal of suspended solids.

Preferably, the process further comprises the steps of filtering some or all of the effluent from

the first membrane stage through a second membrane separation stage for the removal of selected soluble substances. Optionally, the process further includes the step of chemically dosing the effluent from the first membrane stage to prevent precipitation of soluble organic substances in the solution prior to passing through the second membrane stage.

Desirably, the preferred first membrane separation stage is a continuous microfiltration process. The preferred second membrane separation stage will vary according to the quality of the in-feed and the required quality level of the final effluent and may include ultrafiltration, nanofiltration or reverse osmosis, these processes being used either alone or in combination.

Preferably, the process includes the additional steps of periodically washing or back-washing each of the screening and membrane separation stages, and, optionally returning the washing media and accumulated solids directly back to the sewer. In one preferred form, the washing media from the first and/or second membrane separations stages are returned in a manner whereby they are first used to assist in cleaning the screen.

Preferably, the screen aperture sizes are in the range of 50 to 900 microns, a 100 to 500 micron screen opening being the preferred size range. In one useful

form of the process which uses microfiltration followed by reverse osmosis, a 200 to 250 micron screen is preferred.

Washing media for the ultrafiltration or reverse osmosis stage may include chemical cleaning agents.

In a preferred form, the screening is conducted within the sewer main or a preferably closed-in well diverted directly therefrom, via a substantially self-cleaning screen system such as a screen made in accordance with the third aspect of the invention. Other suitable screens include rotating belt or drum screens, bag screens and the like. Desirably, the screen also includes washing means comprising nozzles or jets or the like that direct water and/or air or other washing medium to the screen surface.

The use of an in-sewer screen has several advantages in that it is easier to control odour, handling of the screenings is substantially eliminated and only one pumping stage will be required to the microfiltration stage.

In one preferred form, the process also includes the step of passing the screened effluent through a trickle bed suspended growth filter arrangement prior to the microfiltration stage.

Desirably, the process also includes the step of dosing the screened effluent with a coagulant prior to the microfiltration stage.

In a further embodiment, the effluent from the second membrane separation stage may be sterilised, preferably by passing ozone therethrough.

According to a second aspect of the invention there is provided an apparatus for recovering water from raw sewage extracted directly from a sewer, said apparatus comprising:

screening means operable to obtain from raw sewage a screened effluent having a maximum particle size of no more than approximately 900 microns; and

first membrane separation means operable to filter the suspended solids from some or all of the screened effluent.

Desirably, the apparatus further comprises second membrane separation means operable to filter selected soluble substances from some or all of the effluent from the first membrane separation means.

Optionally, the apparatus also includes chemical dosing means to treat the effluent from the first membrane separation stage so as to prevent precipitation of soluble organic substances in solution.

Desirably, the apparatus also includes means to periodically wash or back-wash each of the screening and membrane separation stages and return the washing media and accumulated solids back to the sewer.

Preferably, the apparatus also includes means by

which some or all of the process preferments of the first aspect of the invention are obtained.

According to a third aspect of the invention there is provided a screening device for screening raw sewage from a sewer, said device comprising:

a screen adapted to permit passage of screened effluent from an outer surface of the screen through the screen; and

means to direct air generally toward an inner surface of the screen to assist in removal of solids that accumulate on the outer surface of the screen.

In the preferred form the screen defines a portion of the surface of an enclosed chamber and is adapted to permit passage of screened effluent from the outer surface of the screen through the screen and into the chamber. Desirably, a pump is provided within the chamber to extract and divert the screened effluent.

Preferably, the screen also includes means to direct cleaning water or other washing media to the screen. This may include means to direct washing media from the inner surface of the screen and out through the screen and/or directly to the outer surface of the screen.

The screen element of the device may be static such as sieve bends, bag screens, floating bag screens, enclosed in-line screens etc, or dynamic

screens such as rotating drums or rotating disc screens and the like.

Optionally, the screen may also include some form of scraping mechanism selectively operable on the outer surface of the screen. In another form, the device may include means to vary the inclination of the screen to the general sewage flow direction such that the tangential flow of sewage assists in cleaning the screen. Alternatively, the device may be disposed so as to utilise any turbulent sewage flow in the well to clean the screen by, for example, placing the screen under the inlet.

In another embodiment the screen includes mechanical means to vibrate the screen and dislodge accumulated screenings.

The cleaning air directed to the screen also serves as a gas/odour scrubber. In one preferred form, intermittent high pressure air blasts are used to periodically dislodge screenings and generally continuous lower pressure air jets operate to deodorise the screened effluent. In this way odours are kept substantially in the sewer, allowing transfer of screened, aerated sewage to the surface for further treatment.

BRIEF DESCRIPTION OF THE DRAWINGS

A preferred embodiment of each aspect of the invention will now be described, by way of example

only, with reference to accompanying drawings in which:

Figure 1 is a schematic flow diagram of a first embodiment process and apparatus according to the first and second aspects of the invention; and

Figure 2 is a schematic flow diagram of a first embodiment sewage screen in accordance with the third aspect of the invention;

Figure 3 is a graph illustrating the variation in RO permeate flows with run hours for the system described in Example 1 made in accordance with the first and second aspects of the invention; and

Figure 4 is a graph illustrating the variation in salt passage with run hours for the example referred to in Figure 3.

PREFERRED EMBODIMENT OF THE INVENTION

Referring first to Figure 1, the water recovery apparatus 1 comprises a screening device 2 illustrated in location either directly in a sewer 3 or a well diverted therefrom, the screening device being connected by piping 4 to a first membrane separation stage comprising a continuous microfiltration (CMF) unit 5.

Chemical dosing means 6 are optionally connected with the piping 7 that carries the effluent from the microfiltration units 5. The piping 7 extends from the microfiltration unit 5 to a second membrane separation stage 8 which in the form illustrated

comprises a reverse osmosis (RO) filter.

An optional trickle bed suspended growth filter 9 is illustrated intermediate the screen 2 and microfiltration unit 5 with an optional ozonation process 10 adjacent the outlet from the RO unit 8.

Referring next to Figure 2, there is shown a preferred screen arrangement 2 made in accordance with the second aspect of the invention. The screening device 2 preferably has a generally mushroom shaped construction, the top outer surface 12 supporting a filter screen 13 that has an outer surface 14 and an inner surface 15. The screen 13 defines part of a chamber shown generally at 16. The screen in this preferred form has a mesh size selected to result in a screened effluent having a maximum particle size of around 200 to 250 microns.

Disposed below the screen 13 are a plurality of optional cleaning liquid nozzles 17 arranged on a manifold 18 which are preferably connected to a high pressure water or cleaning agent source (not shown). High pressure cleaning liquid from the nozzles can be directed toward the screen surface to assist in the removal of accumulated debris and thereby prevent blockages. Optionally, the screen is also rotatable to assist in cleansing of the screen.

Illustrated immediately below the liquid nozzles and screen are means to admit high pressure air into

- 11 -

the chamber 16 shown generally at 19. Air is periodically or continuously admitted to the chamber preferably using nozzles, perforations or micro-venturis or the like in a manner whereby the air is directed generally toward the inner surface of the screen. An air bleed-off tube 20 may also be provided to ensure air flow is continuous when applied even when the screen is blocked. The air serves not only to aerate the screened effluent and/or scrub the odour from the gaseous portion of the effluent, but also contributes in a surprisingly effective manner to cleaning the screen by applying pressure from the inner surface causing the sludge to be driven away from the sieve's outer surface 14 and by causing vibration of the screen surface helping to dislodge solids.

Finally, the stem of the mushroom shaped screening arrangement houses a submersible pump 16 which directs the screened aerated and scrubbed sewage effluent to piping 4 and optionally onto the trickle bed filters 9 or direct to the microfiltration units 5. Suitable microfiltration units may be selected from the range of products produced by Memtec Ltd and sold under the registered trade mark "Memtec" such as the M10 CMF unit.

The CMF units 5 and RO units 8 each include means for chemically washing or back-washing the various devices. The washing media and accumulated solids

This Sheet Has Been Replaced



washed from these units is preferably directed back to the sewer via conduits 22 and 23 respectively. This can be diverted onto or toward the outer surface 14 of the screen 13 to assist in keeping the screen clear.

The main steps and optional variations in the process and apparatus in accordance with the first aspect of the invention will now be described in more detail.

Commencing with the screening that forms part of the treatment process of the first aspect of the invention, it will be appreciated that the embodiment illustrated in Figure 2 is only one preferred form and that it will be possible to achieve the design criteria with a number of physically different screen embodiments. In this regard, commercially available rotating drum screens, belt screens and various agitating screen arrangements could be modified to meet the requirements of the invention. Similarly, a generally stationary screen that can be inclined relative to the sewage flow for cleaning purposes can also be used.

In most cases the preferred form of the screen will be configured to provide a filtration velocity therethrough of preferably less than $1.0 \text{ m}^3/\text{s}/\text{m}^2$ and a resulting filtrate having a maximum particle size of no more than approximately 900 microns and more ideally around 200 to 250 microns. It will be appreciated that these figures are in part dependent

on the particular apparatus or models selected.

It will also be appreciated that whilst location of the screen 2 within the sewer 3 or an adjacent well is the preferred arrangement, another option is to pump the sewage from the sewer to an above-ground screening arrangement.

The total number of pumps required will depend very much on the topography of the sewage extraction location and whether or not the selected filtration units incorporate their own pumping systems. Generally, however, it is believed that an additional pumping stage is required where the screening is performed external to the sewer.

Another optional procedure in the process is a coagulant dosing stage which would occur prior to the microfiltration stage 5 at point 24. Where a biological trickle bed filter arrangement is also included in the process, the coagulant dosing is desirably performed downstream of this biological treatment as shown.

The chemical dosing stage shown generally at 6 may comprise a number of known treatments such as injection of an anti-scalant at location 25 followed by injection of an organics dispersant at location 26 and/or injection of disinfectant e.g. chlorine at location 27 to control biological growth.

In use, effluent is drawn through the screening device 2 and pumped via conduit 4 either directly to a

microfiltration unit 5 or an optional trickle bed filter 9. Depending on the nature of the sewage, the effluent may be dosed with a coagulant prior to the microfiltration stage.

The microfiltration serves to substantially reduce the quantity of suspended solids. Where the microfiltration units appear to be having difficulties in processing the in-feed, a certain degree of cross-flow through the microfiltration units can be tolerated. When the microfiltration units become clogged, the system automatically performs a back-washing operation and the back-wash is preferably returned to the sewer via conduit 17.

The BOD of the effluent exiting the microfiltration stage may still be fairly high, in which case it is desirable to inject an organic dispersant prior to passing the microfiltered effluent through the RO or other second membrane separation stage. This serves to prevent the soluble organic matter from precipitating out of solution and blocking the membranes of the RO. The final effluent exiting the RO will have a substantially reduced BOD and may optionally be further treated/sterilised by injection of chlorine or ozone.

The results of preliminary tests incorporating pre-screening of raw sewage followed by CMF and then RO are as follows.

Example 1 - Pre-Screened Raw Sewage to CMF and RO

Raw sewage, taken directly from the sewage treatment plant inlet, was screened to 200 micron using a bag filter. The screened sewage was then directed to a model "3M1 Microcompact" manufactured by Memtec Limited, which contains three membrane modules. The unit was fitted with a centrifugal feed pump with a maximum pressure of 120 kPa and was operated in the "dead-end" mode. The microfiltration membrane is made from polypropylene and has a nominal pore size of 0.2 microns. The system operates by filtering from the outside of hollow fibres to the inside, thus accumulating a filter cake on the surface of the membrane. This cake is periodically removed using a compressed air/liquid back-wash. During back-washing air is forced through the membrane from the inside of the hollow fibre to the outside. This dislodges the filter cake which is then washed away by a liquid sweep on the outside of the fibres.

The microfilter was run for a total of 124 hours at feed temperatures ranging from 19 to 23°C and pH from 7.5 to 9.0. Back-washing was set to occur automatically every 18 minutes. The flowrate from the microfilter was initially 300 L/h but was later reduced to 200 L/h. Chemical cleaning of the membrane using caustic and surfactants was carried out every 24 hours to maintain the flowrate.

Filtrate from the microfilter was directed to an Admiral SW700 reverse osmosis unit (RO) manufactured by Memtec Limited. The reverse osmosis unit was fitted with a 2.5 inch x 25 inch cellulose acetate reverse osmosis membrane.

The reverse osmosis unit was run for a total of 93.5 hours at an average permeate flux of 17.6 GFD (US gallons/sq. foot/day) with a concentrate flow of 6 L/min. This gave an average recovery of 7.85%. The operating pressure of the system was kept constant at a value of 1800 kPa throughout the trial. Concentrate recycle was used to maintain the required flow in the RO unit. Chlorine (in the form of sodium hypochlorite) was added at 1 ppm to the RO feed to control biological fouling.

Normalised permeate flows for the RO are listed in the table below and shown graphically in Figure 3.

Run hours	Permeate flow (GFD)
30.8	17.6
32	17.6
36.6	18.1
56.6	18.1
72.3	17.6
78.5	16.5
93.5	17.4

The data shows a slight variation in normalised flow but generally stable performance. This is supported by the salt passage data listed in the table below and presented graphically in Figure 4, which

varied between about 2.2% and 2.7%.

Run hours	Salt Passage %
30.8	2.53
32	2.22
36.6	2.3
56.6	2.53
72.3	2.72
78.5	2.45
93.5	2.73

The ability of the system to reject contaminants from the sewage was also studied. This involved analysis of the screened raw sewage, microfiltered effluent (filtrate), and reverse osmosis effluent (RO permeate). Samples were analysed for bacteria (faecal coliforms), Chemical Oxygen Demand (COD), Biochemical Oxygen Demand (BOD), Nitrates, Ammonia, Total Kjeldahl Nitrogen (TKN), and Total Phosphorus. Averaged results are summarised in the table below.

Analysis	Screened raw sewage feed	Microfilter filtrate	RO% permeate	% Removal
Faecal coliforms cfu/100mL	8×10^6	0.5	0.8	100
COD mg/L	376	102	14	96
BOD mg/L	141	52	15	89
Nitrate mg/L as N	0.05	0.01	0.01	72
Ammonia mg/L as N	33.2	29	1.5	95
TKN mg/L as N	43.6	34.4	2.2	95
Tot. Phos. mg/L P	9.6	9.7	0.3	97
TDS mg/L	408	408	18	96
Conductivity uS/cm@25°C	963	929	30	97

number of samples = 5

Conclusion of Treatment System Test

The data shows that operation of the microfilter on screened raw sewage is feasible and that the

filtrate produced provides a suitable feed for reverse osmosis. Effluent (permeate) from the reverse osmosis process is of near potable quality and suitable for many reuse applications. The process has also been shown to be easily stopped and started with no apparent adverse affects. It should also be noted that the average permeate flux of 17.6 achieved to date is extremely good, as this is almost twice the accepted industry norm. Surprisingly, it was also unnecessary to chemically clean the RO unit during the albeit limited duration of the tests.

It will be immediately apparent to those skilled in the art that the process and apparatus according to the first aspect of the invention provides a system which is substantially more compact and more flexible than any water from sewage mains extraction process previously known.

The advantages arise at least in part from the substantial elimination or reduction in the need for any settlement holding tank type treatment. This ability to optionally eliminate the need for any long term and cumbersome settlement or bio-digestion process arises from the unexpected discovery that screened raw effluent can be successfully processed directly by microfiltration.

Turning next again to the screening device made in accordance with the third aspect of the invention,

it will be appreciated that the device is not limited to the specific form described. More particularly, the screen element of the device, to the rear side of which the cleaning air is directed, may be of the static kind such as used in sieve bends, bag screens or enclosed screens of the kind described, or dynamic screens such as rotating drum screens or rotating disc screens and the like.

The results of preliminary tests conducted on the preferred form of the pre-screen device as illustrated in Figure 2 are as follows.

Example 2 - Pre-Screen Operation

A prototype pre-screen, containing water sprays and an air distribution system for aeration as described in Figure 2, was manufactured and fitted with a 500 micron aperture screen with an open area of 45.5%. The total screen area was 0.26 m^2 . The screen was operated at a constant flow of 33 L/min. Screening velocities of 0.002, 0.004 and 0.008 $\text{m}^3/\text{s}/\text{m}^2$ were tested by varying the exposed screen area.

The screen was submerged in a well in the form of the inlet forebay of a sewage treatment plant such that the entire screen device was completely covered by raw, untreated sewage. Without the aeration activated and at a flow of 33 L/min and a screening

velocity of $0.004 \text{ m}^3/\text{s}/\text{m}^2$ the screen was able to operate for approximately 15 minutes before blocking up with fibrous material and other solids. With aeration activated the screen was operated for over 90 minutes without any signs of blockage. Turning the aeration off resulted in the screen blocking after a further 17 minutes. Once blocked the screen could be cleaned effectively using the water sprays, but was more readily cleaned using a combination of water sprays and aeration.

The above was repeated at a screen velocity of $0.008 \text{ m}^3/\text{s}/\text{m}^2$. Without aeration the screen blocked after approximately 3 to 4 minutes. However, by applying short bursts of aeration, lasting about 10 seconds, every 3 minutes the screen was effectively cleaned whilst submerged allowing operation to continue.

Samples collected showed a total solids reduction of about 30 to 40%.

Example 3 - Pre-Screen Operation

In this test the screen used in Example 2 was refitted with a 250 micron aperture screen with an open area of 50% and tested at a filtration velocity of $0.003 \text{ m}^3/\text{s}/\text{m}^2$.

Without aeration screen blockage occurred after about 2 minutes of operation. By applying 10 second

bursts of aeration every 2 minutes or by leaving the aeration on continuously, screen operation was continued for 75 minutes without blocking. Once blocking occurs (either by insufficient aeration or no aeration) the screen could be cleaned by turning the water sprays on for about 10 to 30 seconds.

Turbulence in the forebay, that occurred when feed was intermittently sent to the sewage treatment plant from one of the pumping stations, also aided in cleaning the screen as screened material was easily washed from the screen surface. This highlighted the benefit of designing the screen to take advantage of natural flows and turbulence that may be present in the sewer main. Alternatively, artificial turbulence and tangential screen flows could be achieved by careful design of the sump or pit in which the screen is located.

Example 4 - Pre-Screen Operations

The pre-screen of Example 2 was fitted with an 850 micron screen with an open area of 50% and tested at a screening velocity of $0.003 \text{ m}^3/\text{s}/\text{m}^2$.

The screen operated with no aeration and no water spray for a total of 34 minutes before blocking. With aeration activated, the screen operated for over an hour without any signs of blocking. Samples taken showed a solids removal of 20%.

After a total of 90 minutes operation the screen was removed and examined. Whilst the bulk of the screen was clean some sections that were not contacted by spray water, had fibrous material that was becoming entangled in the screen and was not easily removed. This had not been a problem on the finer screens tested (Examples 2 and 3) as fibres and other solids tended to lay on the surface and could easily be removed using air and/or water.

Conclusion of Pre-Screen Tests

All the screens tested were effective at removing fibrous material with the finer screens (250 to 500 microns) being easier to clean. Solids removal ranged from approximately 30% to 40% for the 250 micron screen to about 20% for the 850 micron screen.

The water sprays were capable of keeping the screen clean although it was found to be most effective when used in conjunction with the aeration.

The aeration system provided a well aerated sewage (evidenced by fine bubbles in samples collected) and also assisted in maintaining a clean screen.

It has been found with screens according to this third aspect of the invention, that directing air and/or cleaning fluid to the inner side of the screen remote from the surface on which the sludge

accumulates, provides a surprisingly effective method of keeping the screen clean.

With the screens having apertures in particular of around 500 microns or less, the sludge is seen to build up when no air is supplied. However, once the aeration is activated, the accumulated sludge simply slides off the screen in fragmented sheets. When the air is applied continuously there does not appear to be any substantial build up of sludge.

Although the invention has been described with reference to specific examples, it will be appreciated by those skilled in the art that the invention may be embodied in many other forms.



THIS SHEET HAS BEEN
REPLACED

- 24 -

THE CLAIMS DEFINING THE INVENTION ARE AS FOLLOWS:-

1. A process for recovering water from raw sewage extracted directly from a sewer, said process comprising the steps of:

screening the raw sewage to obtain screened effluent having a maximum particle size of no more than approximately 900 microns; and

filtering some or all of the screened effluent through a first membrane separation stage for the removal of suspended solids.

2. A process according to claim 1 further comprising the step of filtering some or all of the effluent from the first membrane stage through a second membrane stage for the removal of selected soluble substances.

3. A process according to claim 2 further comprising the step of chemically dosing the effluent from the first membrane stage to prevent precipitation of soluble organic substances in the solution prior to passing through the second membrane stage.


4. A process according to any one of the preceding claims wherein the first membrane separation stage is a continuous microfiltration process.

5. A process according to any one of claim 2 to 4 wherein the second membrane separation stage is a reverse osmosis process.

6. A process according to any one of the preceding claims further including the step of periodically

This Sheet Has Been Replaced





THIS SHEET HAS BEEN
REPLACED

- 25 -

washing or back-washing the screening and membrane separation stage or stages and returning the washing media and accumulated solids directly back to the sewer.

7. A process according to claim 6 wherein the washing media is returned in a manner whereby it is used to assist in cleaning the screen.

8. A process according to any one of the preceding claims wherein the screening of the raw sewage uses a screen having aperture sizes in the range of 50 to 900 microns.

9. A process according to claim 8 wherein the screen has aperture sizes in the range of 100 to 500 microns.

10. A process according to claim 8 or claim 9 wherein the screen has aperture sizes in the range of 200 to 250 microns.

11. A process according to any one of the preceding claims wherein the screening process is conducted within the sewer main or a well that is diverted directly from the sewer main.

12. A process according to any one of the preceding claims wherein the screening stage uses a static screening device.

13. A process according to any one of the preceding claims wherein the screening stage includes the step of continuously or intermittently applying a washing fluid to the screen to keep it clean.

This Sheet Has Been Replaced





THIS SHEET HAS BEEN
REPLACED

- 26 -

14. A process according to any one of the preceding claims further including the step of passing the screened effluent through a trickle bed suspended growth filter or other low residence time biological treatment process prior to the microfiltration stage.

15. A process according to any one of the preceding claims further including the step of dosing the screened effluent with a coagulant prior to the first membrane separation.

16. A process according to any one of claims 2 to 15 including a final sterilization stage.

17. A process according to any one of claims 2 to 16 including a stage for disinfecting effluent from the first membrane separation process to prevent biogrowth in the second membrane separation process.

18. An apparatus for recovering water from raw sewage extracted directly from a sewer, said apparatus comprising:

screening means operable to obtain from raw sewage a screened effluent having a maximum particle size of no more than approximately 900 microns; and

first membrane separation means operable to filter the suspended solids from some or all of the screened effluent.

19. An apparatus according to claim 18 further comprising second membrane separation means operable to filter selected soluble substances from some or all

This Sheet Has Been Replaced





THIS SHEET HAS BEEN
REPLACED

- 27 -

of the effluent from the first membrane separation means.

20. An apparatus according to claim 19 further comprising chemical dosing means to treat the effluent from the first membrane separation stage so as to prevent precipitation of soluble organic substances in solution.

21. An apparatus according to any one of claims 18 to 20 including means to periodically wash or back-wash the screening and membrane separation stage or stages and return the washing media and accumulated solids back to the sewer.

22. An apparatus according to claim 21 including means to direct the washing media back to the sewer in a manner whereby it assists in cleaning the screen.

23. An apparatus according to any one of claims 18 to 22 wherein the screen aperture sizes are in the range of 50 to 900 microns.

24. An apparatus according to any one of claims 18 to 23 wherein the screen aperture sizes are in the range of 200 to 250 microns.

25. An apparatus according to any one of claims 21 to 24 wherein the washing media for the first and/or second membrane separation stage includes chemical cleaning agents.

26. An apparatus according to any one of claims 18 to 25 wherein the screening device is designed for use

This Sheet Has Been Replaced





THIS SHEET HAS BEEN
REPLACED

- 28 -

within the sewer main or a well diverted directly from the sewer main.

27. An apparatus according to any one of claims 18 to 26 wherein the screening means comprises a static screen.

28. An apparatus according to any one of claims 18 to 27 wherein the screening means comprises a dynamic screen such as a rotating belt or drum screen.

29. An apparatus according to any one of the claims 18 to 28 wherein the screening means includes washing nozzles or jets that direct water and/or air or other washing medium to the screen.

30. An apparatus according to any one of claims 18 to 29 further including a trickle bed suspended growth filter arrangement disposed prior to the first membrane separation stage.

31. An apparatus according to any one of claims 18 to 30 further comprising means to dose the screened effluent with a coagulant prior to the first membrane separation means.

32. An apparatus according to any one of claims 18 to 31 further comprising sterilization means disposed to treat the effluent from the first or second membrane separation means.

33. An apparatus according to any one of claims 19 to 32 further comprising means to disinfect the effluent from the first membrane separation process to prevent

This Sheet Has Been Replaced





THIS SHEET HAS BEEN
REPLACED

- 29 -

biogrowth in the second membrane separation process.

34. A screening device for screening raw sewage from a sewer, said device comprising:

a screen adapted to permit passage of screened effluent from an outer surface of the screen through the screen; and

means to direct air generally toward an inner surface of the screen to assist in removal of solids that accumulate on the outer surface of the screen.

35. A screening device according to claim 34 including means to direct air to the inner surface of the screen in intermittent cleaning blasts and/or on a continuous basis for odour scrubbing.

36. A screening device according to claim 34 or 35 wherein the screen defines a portion of the surface of an enclosed chamber and is adapted to permit passage of screened effluent from the outer surface of the screen through the screen and into said chamber.

37. A screening device according to claim 36 including a pump for extracting the screened effluent from the chamber.

38. A screening device according to any one of claims 34 to 37 including means to direct cleaning water or additional washing media to the screen.

39. A screening device according to any one of claims 34 to 38 wherein the screen is a static screen.

40. A screening device according to any one of claims

This Sheet Has Been Replaced





THIS SHEET HAS BEEN
REPLACED

- 30 -

34 to 38 wherein the screen is a dynamic screen such as a rotating drum screen or disc screen.

41. A screening device according to any one of claims 34 to 40 including some form of additional scraping mechanism selectively operable on the outer surface of the screen.

42. A screening device according to any one of claims 34 to 41 wherein the shape of the screen is configured to as to utilize the expected turbulent sewer flow to assist in cleaning the screen.

43. A screening device according to any one of claims 34 to 41 including means to vibrate the screen and dislodge accumulated sludge.

44. A process for recovering water from raw sewage extracted directly from a sewer in accordance with any one of claims 1 to 17 incorporating a screening process that use a screening device in accordance with any one of claims 34 to 42.

45. An apparatus for recovering water from raw sewage extracted directly from a sewer made in accordance with any one of claims 18 to 33 incorporating a screening device in accordance with any one of claims 34 to 43.

This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED

ABSTRACT

Title: METHOD AND APPARATUS FOR RECOVERING WATER
FROM A SEWER MAIN

A process and apparatus (1) for recovering water from raw sewage extracted directly from the sewer including screening means (2) operable to obtain from raw sewage a screened effluent having a maximum particle size of no more than approximately 900 microns. The apparatus also comprises first membrane separation means, preferably in the form of a continuous microfiltration unit (5), which is operable to filter the suspended solids from some or all of the screened effluent.

In the preferred form, the process also includes second membrane separation means, preferably in the form of reverse osmosis filter (8), which operates to filter selected soluble substances from some or all of the effluent from the first membrane separation means (5). Optional additional process stages include chemical dosing means (6) and a trickle bed suspended growth filter (9) or other short residence time biological treatment process.

In the preferred form, the screen mesh size is selected to result in a screened effluent having a maximum particle size of around 200 to 250 microns. Desirably, the screen (2) also includes means to inject air to deodorise the sewage and/or assist in cleaning the screen.

This Sheet Has Been Replaced



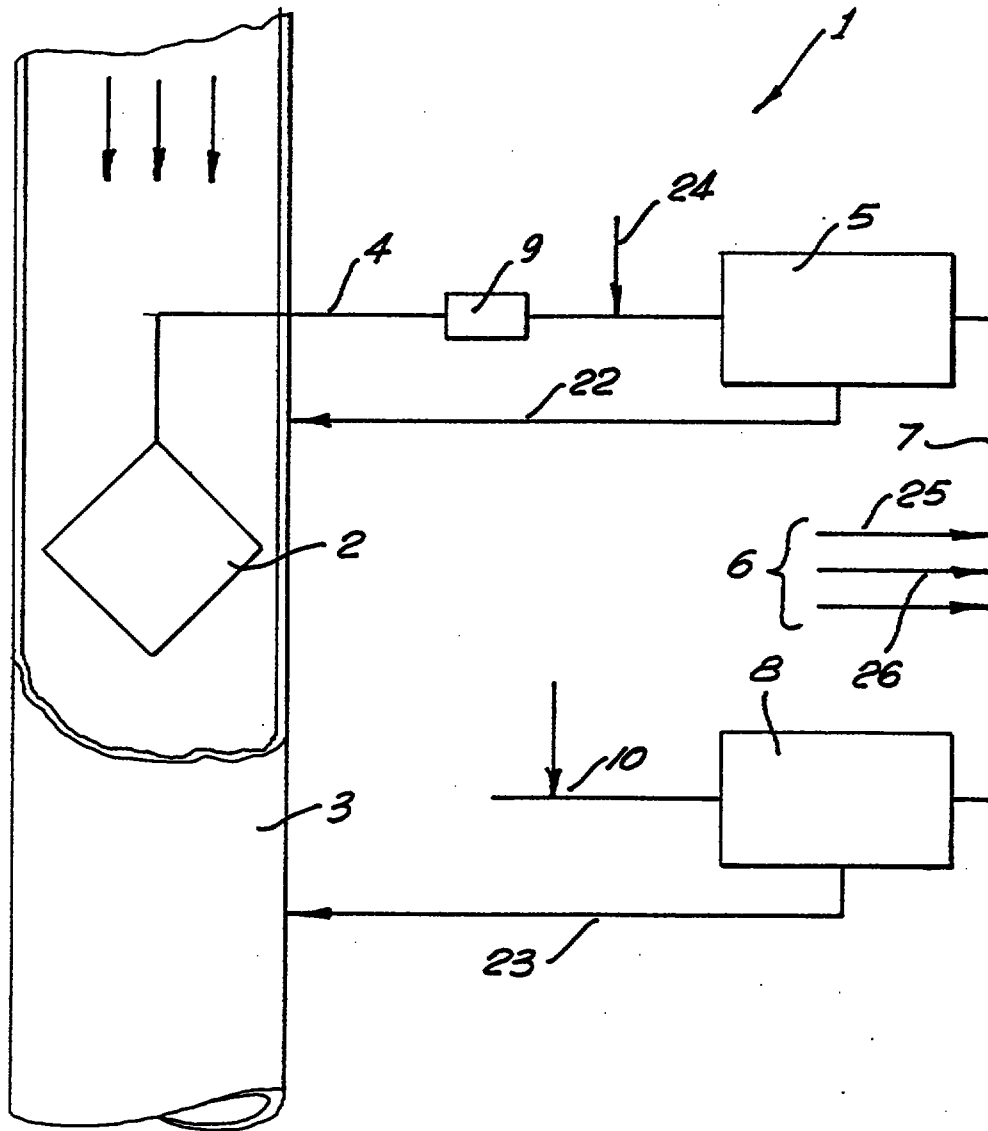
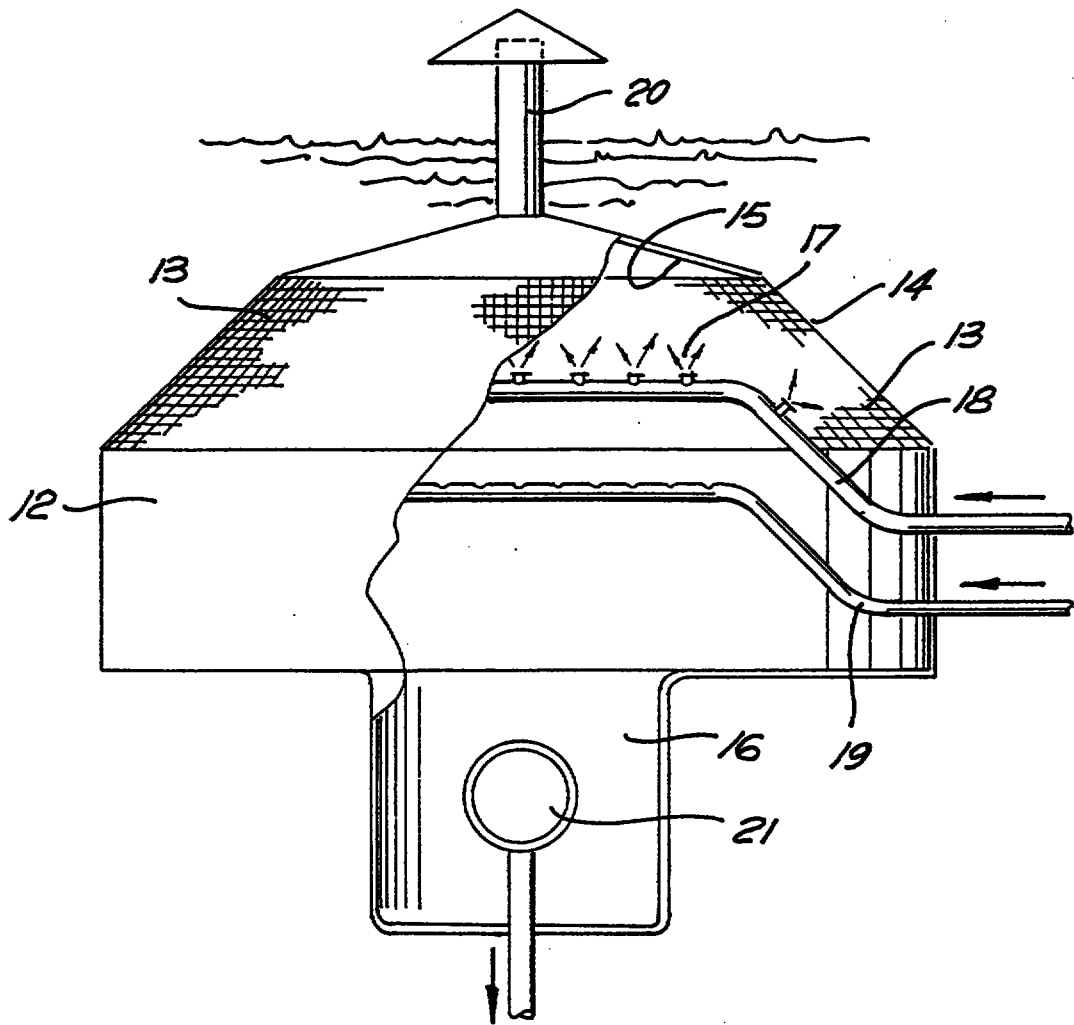
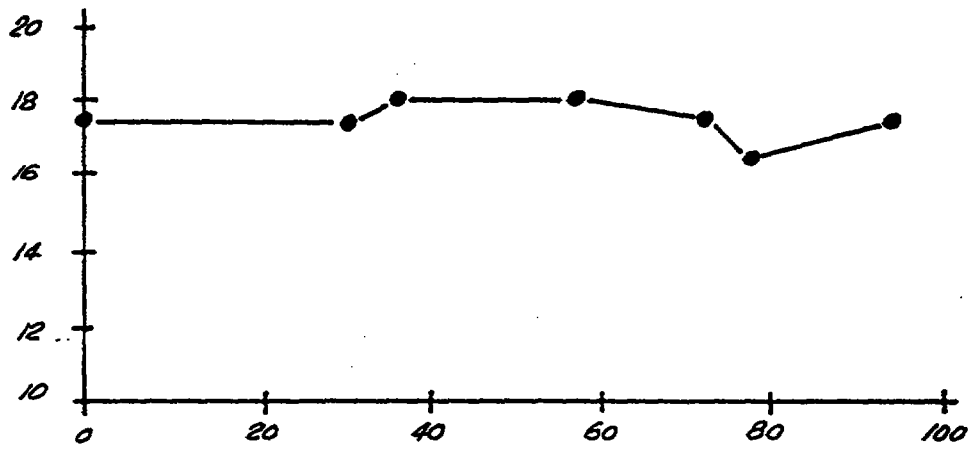
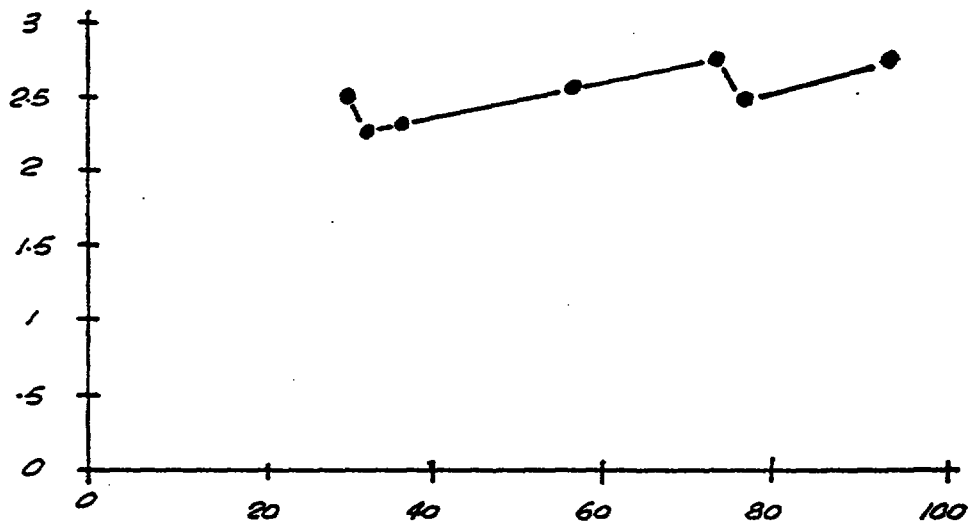


FIG.1



FIG. 2

FIG. 3FIG. 4

THIS SHEET HAS BEEN
REPLACED

REPLACEMENT SHEET

28 MAR 1996

- 31 -

ABSTRACT

Title: METHOD AND APPARATUS FOR RECOVERING WATER
FROM A SEWER MAIN

A process and apparatus (1) for recovering water from raw sewage extracted directly from the sewer including screening means (2) operable to obtain from raw sewage a screened effluent having a maximum particle size of no more than approximately 900 microns. The apparatus also comprises first membrane separation means, preferably in the form of a continuous microfiltration unit (5), which is operable to filter the suspended solids from some or all of the screened effluent.


In the preferred form, the process also includes second membrane separation means, preferably in the form of reverse osmosis filter (8), which operates to filter selected soluble substances from some or all of the effluent from the first membrane separation means (5). Optional additional process stages include chemical dosing means (6) and a trickle bed suspended growth filter (9) or other short residence time biological treatment process.

In the preferred form, the screen mesh size is selected to result in a screened effluent having a maximum particle size of around 200 to 250 microns. Desirably, the screen (2) also includes means to inject air to deodorise the sewage and/or assist in cleaning the screen.

[Selected Drawing]: Fig. 1

This Sheet Has Been Replaced

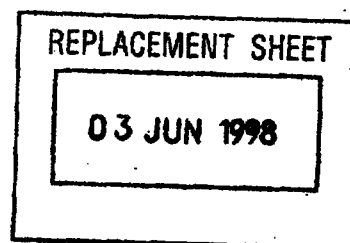

CLAIMS:

1. A process for recovering water from a source of raw sewage extracted from a sewer main (3) , said process comprising the steps of:

directly screening the raw sewage to obtain a screened effluent having a maximum particle size of between 50 and 900 μm ;

filtering some or all of the screened effluent through a first microfiltration membrane separation apparatus (5) for the removal of suspended solids without an intermediate long term biological treatment/settlement stage;

chemically dosing the effluent from the first microfiltration membrane separation apparatus (5) with an anti-scalant (25);

filtering some or all of the chemically dosed effluent from the first microfiltration membrane separation apparatus (5) through a second finer membrane separation apparatus (8);

periodically backwashing said first microfiltration membrane separation apparatus (5) and/or said second finer membrane separation apparatus (8) with a washing medium or media to remove accumulated solids; and

returning said washing medium or media and accumulated solids back to said raw sewage source.

2. A process according to claim 1, wherein the screening step is conducted within the sewer main (3) or a well that is diverted directly from the sewer main.

3. A process according to claim 1 or claim 2, further including the step of dosing the screened effluent with a coagulant (24) prior to filtration through the first microfiltration membrane separation apparatus (5).

03 JUN 1998

4. A process according to any one of the preceding claims, including the step of disinfecting effluent from the first microfiltration membrane separation apparatus (5) to prevent biogrowth in the second finer membrane separation apparatus (8).

5. A process according to any one of the preceding claims, comprising the step of further chemically dosing the effluent from the first microfiltration membrane separation apparatus (5) to prevent precipitation of soluble organic substances in the solution prior to passing through the second finer membrane separation apparatus (8).

6. A process according to any one of the preceding claims, wherein the first microfiltration membrane separation apparatus (5) is arranged to operate a continuous microfiltration process.

7. A process according to any one of the preceding claims, wherein the second finer membrane separation apparatus (8) is arranged to operate a reverse osmosis process.

8. A process according to any one of the preceding claims, wherein the screen (2) used in the screening step has aperture sizes in the range of 100 to 500 μm .

9. A process according to any one of the preceding claims, wherein the screen (2) used in the screening step has aperture sizes in the range of 200 to 250 μm .

10. A process according to any one of the preceding claims, wherein the washing medium or media is or are returned in a manner whereby it or they is or are used to assist in cleaning the screen (2) used in the screening step.



03 JUN 1998

11. A process according to any one of the preceding claims, wherein the screening step uses a static screening device (12).

12. A process according to any one of the preceding claims, wherein the screening step includes the step of continuously or intermittently applying a washing fluid to the screen (13) to keep it clean.

13. A process according to any one of the preceding claims, further including the step of passing the screened effluent through a low residence time trickle bed suspended growth filter (9) or other low residence time biological treatment apparatus prior to the step of filtering through the first microfiltration membrane separation apparatus (5).

14. A process according to any one of the preceding claims, including a final sterilisation step.

15. An apparatus for recovering water from a source of raw sewage extracted directly from a sewer main (3), said apparatus (1) comprising:

screening means (2) operable to obtain directly from raw sewage a screened effluent having a maximum particle size of between 50 and 900 μm ;

first microfiltration membrane separation means (5) operable to filter the suspended solids from some or all of the screened effluent without an intermediate long term biological treatment stage;

means (25) to chemically dose the effluent from the



03 JUN 1998

first microfiltration membrane separation means (5) with an anti-scalant;

second finer membrane filtration means (8) operable to filter selected soluble substances from some or all of the chemically dosed effluent from the first microfiltration membrane separation means (5);

means to periodically backwash the first microfiltration membrane separation means (5) and/or the second finer membrane filtration means (8) with a washing medium or media to remove accumulated solids; and


means (22, 23; 17) to return said washing medium or media and accumulated solids back to said raw sewage source.

16. An apparatus according to claim 15, wherein the screening means (2) is designed for use within the sewer main (3) or a well diverted directly from the sewer main (3).-

17. An apparatus according to claim 15 or claim 16, further comprising means (24) to dose the screened effluent with a coagulant prior to the first microfiltration membrane separation means (5).

18. An apparatus according to any one of claims 15 to 17, further comprising means (27) to disinfect the effluent from the first microfiltration membrane separation means (5) to prevent biogrowth in the second finer membrane filtration means (8).

19. An apparatus according to claim 18, further comprising chemical dosing means (26) to treat the effluent from the first microfiltration membrane separation means (5) so as to prevent precipitation of soluble organic substances in solution.

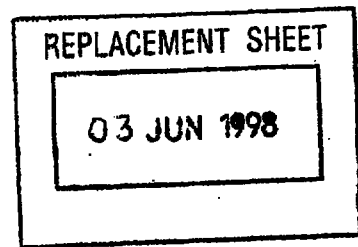

20. An apparatus according to any one of claims 15 to 19, wherein the first microfiltration membrane separation means (5) is arranged to operate a continuous microfiltration process.

21. An apparatus according to any one of claims 15 to 20, wherein the second finer membrane separation stage (8) is arranged to operate a reverse osmosis process.

22. An apparatus according to any one of claims 15 to 21, wherein the aperture sizes of the screening means (2) are in the range of 200 to 250 μm .

23. An apparatus according to any one of claims 15 to 22, including means (17) to direct the washing medium or media back to the sewer in a manner whereby it or they assists or assist in cleaning the screening means (2).

24. An apparatus according to any one of claims 15 to 23, wherein the washing medium or media for the first microfiltration membrane separation means (5) and/or the second finer membrane filtration means (8) includes or include a chemical cleaning agent or agents.

25. An apparatus according to any one of claims 15 to 24, wherein the screening means (2) comprises a static screen (13).



03 JUN 1998

26. An apparatus according to any one of claims 15 to 24, wherein the screening means (2) comprises a dynamic screen such as a rotating belt or drum screen.

27. An apparatus according to any one of claims 15 to 26, wherein the screening means (2) includes washing nozzles or jets (17, 19) that direct water and/or air or other washing medium to the screen.

28. An apparatus according to any one of claims 15 to 27, further including short residence time trickle bed suspended growth filter arrangement (9) disposed upstream from the first microfiltration membrane separation means (5).

29. An apparatus according to any one of claims 15 to 28, further comprising sterilisation means disposed to treat the effluent from the first microfiltration membrane separation means (5) or the second finer membrane filtration means (8).

30. An apparatus according to any one of claims 15 to 29, wherein the screening means (2) is a submersible screening device comprising:

a screen (13) inclined to the horizontal and/or to the direction of sewage flow, said screen (13) defining a portion of a surface of an enclosed chamber (16) and being adapted to permit passage of screened effluent having a maximum particle size of between 50 and 900 μm from an outer surface (24) of the screen

03 JUN 1998

30

(13), through the screen (13), and into said chamber (16),

means (19) disposed within said chamber (16) to direct air generally toward an inner surface (15) of the screen (13) to assist in removal of solids that accumulate on the outer surface (14) of the screen (13) by applying pressure to the inner surface (15) of the screen (13) and causing vibration of the outer surface (14) of the screen (13);

means (21) to extract a screened effluent from said chamber (16); and


an air bleed-off outlet (20) disposed adjacent an upper edge of the screen (13) to facilitate venting of excess air in said chamber (16).

31. An apparatus according to claim 30, including means (19) to direct air to the inner surface (15) of the screen (13), in intermittent cleaning blasts and/or on a continuous basis for removal of solids and odour scrubbing.

32. An apparatus according to claim 30 or claim 31, wherein said screen (12) is generally convex.

33. An apparatus according to claim 32, wherein the air bleed-off outlet (20) is disposed adjacent the apex of the convex screen (12).

34. An apparatus according to any one of claims 30 to 33, wherein said effluent extraction means (21) are in the form of a pump.

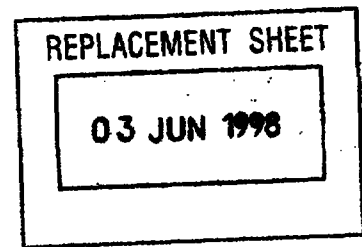

35. An apparatus according to any one of claims 30 to 34, including means (17, 18) to direct cleaning water or additional washing media to the screen (12).

36. An apparatus according to any one of claims 30 to 35, including an additional scraping mechanism selectively operable on the outer surface (14) of the screen (13).

37. A process for recovering water from a source of raw sewage extracted from a sewer main (3) substantially as herein described with reference to any of the embodiments shown in the accompanying figures.

38. An apparatus for recovering water from a source of raw sewage extracted from a sewer main (3) substantially as herein described with reference to any of the embodiments shown in the accompanying figures.

39. A process as claimed in claim 1 for recovering water from a source of raw sewage extracted from a sewer main (3), substantially as herein before described with reference to any one of the examples contained herein.

40. An apparatus as claimed in claim 15 for recovering water from a source of raw sewage extracted from a sewer main (3), substantially as herein before described with reference to any one of the examples contained herein.

03 JUN 1998

1/3

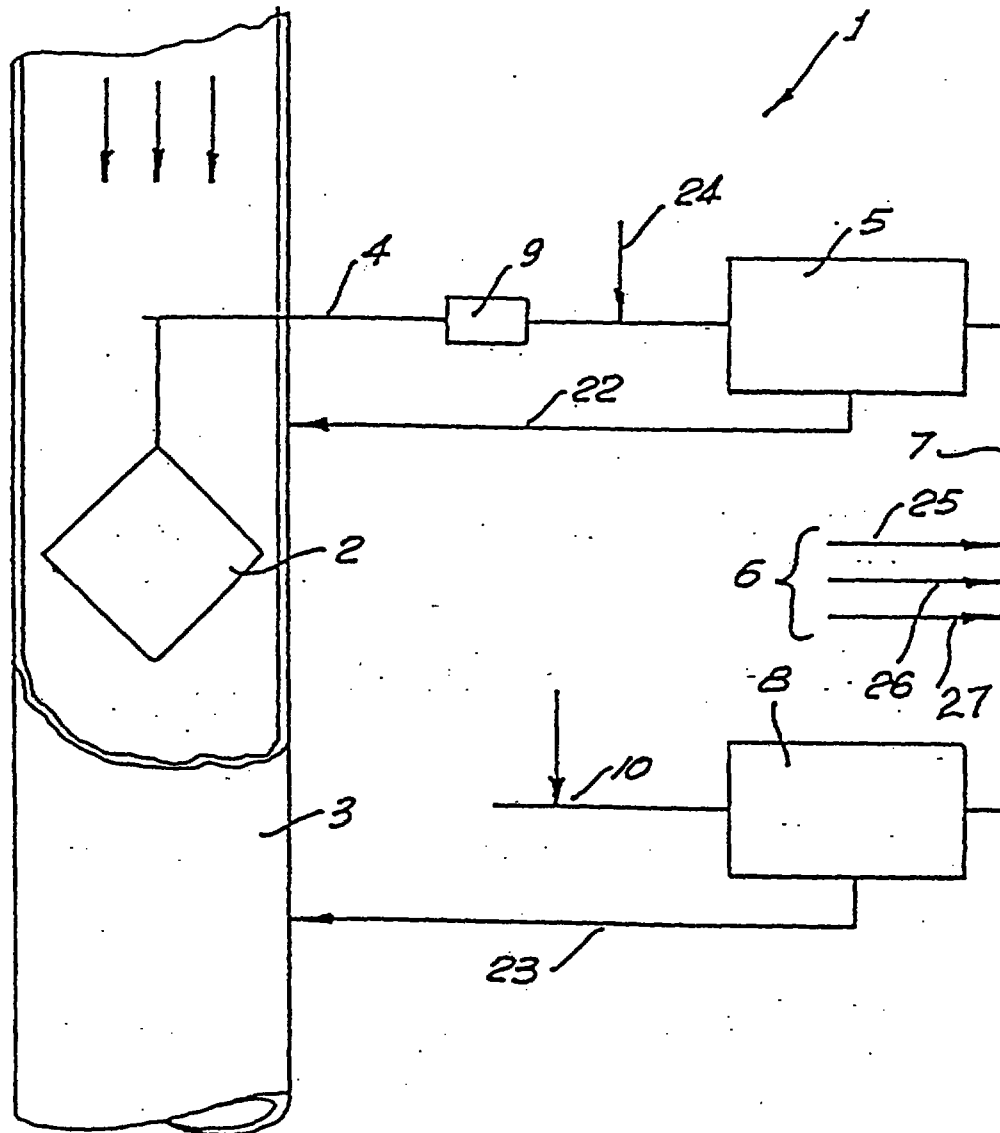



FIG. 1

03 JUN 1998

the chamber 16 shown generally at 19. Air is periodically or continuously admitted to the chamber preferably using nozzles, perforations or micro-venturis or the like in a manner whereby the air is directed generally toward the inner surface of the screen. An air bleed-off tube 20 may also be provided to ensure air flow is continuous when applied even when the screen is blocked. The air serves not only to aerate the screened effluent and/or scrub the odour from the gaseous portion of the effluent, but also contributes in a surprisingly effective manner to cleaning the screen by applying pressure from the inner surface causing the sludge to be driven away from the sieve's outer surface 14 and by causing vibration of the screen surface helping to dislodge solids.

Finally, the stem of the mushroom shaped screening arrangement houses a submersible pump 21 which directs the screened aerated and scrubbed sewage effluent to piping 4 and optionally onto the trickle bed filters 9 or direct to the microfiltration units 5. Suitable microfiltration units may be selected from the range of products produced by Memtec Ltd and sold under the registered trade mark "Memtec" such as the M10 CMF unit.

The CMF units 5 and RO units 8 each include means for chemically washing or back-washing the various devices. The washing media and accumulated solids

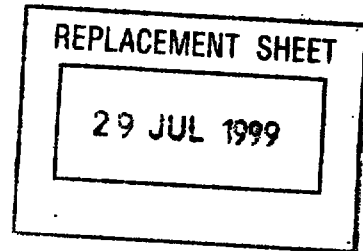

ABSTRACT

Title: METHOD AND APPARATUS FOR RECOVERING WATER
FROM A SEWER MAIN

A process and apparatus (1) for recovering water from raw sewage extracted directly from the sewer including screening means (2) operable to obtain from raw sewage a screened effluent having a maximum particle size of no more than approximately 900 microns. The apparatus also comprises first membrane separation means, preferably in the form of a continuous microfiltration unit (5), which is operable to filter the suspended solids from some or all of the screened effluent.

In the preferred form, the process also includes second membrane separation means, preferably in the form of reverse osmosis filter (8), which operates to filter selected soluble substances from some or all of the effluent from the first membrane separation means (5). Optional additional process stages include chemical dosing means (6) and a trickle bed suspended growth filter (9) or other short residence time biological treatment process.

In the preferred form, the screen mesh size is selected to result in a screened effluent having a maximum particle size of around 200 to 250 microns. Desirably, the screen (2) also includes means to inject air to deodorise the sewage and/or assist in cleaning the screen.