

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
5 March 2009 (05.03.2009)

PCT

(10) International Publication Number
WO 2009/026939 A1

(51) International Patent Classification:
B63H 9/06 (2006.01)

(21) International Application Number:
PCT/EP2007/007449

(22) International Filing Date: 24 August 2007 (24.08.2007)

(25) Filing Language: English

(26) Publication Language: English

(71) Applicant (for all designated States except US): **SKY-SAILS GMBH & CO. KG** [DE/DE]; Veritaskai 3, 21079 Hamburg (DE).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **REUSCH, Bastian** [DE/DE]; Georgstr. 32, 23558 Lübeck (DE).

(74) Agent: **BIRKEN, Lars**; Eisenführ, Speiser & Partner, Zip-pelhaus 5, 20457 Hamburg (DE).


(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, MT, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:
— with international search report

(54) Title: AERODYNAMIC WIND PROPULSION DEVICE AND METHOD FOR CONTROLLING

Fig. 1

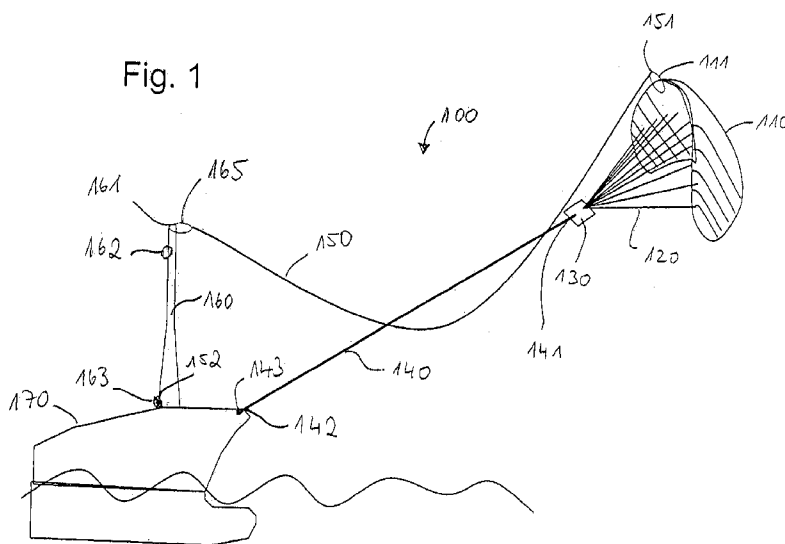

(57) Abstract: The invention relates to an aerodynamic wind propulsion device, particularly for watercrafts, comprising an aerodynamic wing being connected to a steering unit a tractive cable, wherein a first end of the tractive cable being connected to the steering unit and a second end of the tractive cable being connected to a base platform, a guiding line having a first end connected to the aerodynamic wing or to the steering unit, a pole being connected to the base platform. According to the invention, an aerodynamic wind propulsion device as mentioned above is provided, characterized in that a second end of the guiding line is connected to the base platform during and between starting and landing manoeuvres wherein the guiding line is guided through or along the pole and is capable of transferring a tensile force onto the aerodynamic wing at least during starting or landing.