




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : G01L 19/00, F16K 27/02	A1	(11) International Publication Number: WO 96/18091 (43) International Publication Date: 13 June 1996 (13.06.96)
(21) International Application Number: PCT/US95/15769 (22) International Filing Date: 5 December 1995 (05.12.95) (30) Priority Data: 08/352,320 / 8 December 1994 (08.12.94) / US 08/536,324 / 29 September 1995 (29.09.95) / US (71) Applicant: ROSEMOUNT INC. [US/US]; 12001 Technology Drive, Eden Prairie, MN 55344 (US). (72) Inventors: PETRICH, William, E.; 2134 Perry Avenue North, Golden Valley, MN 55422 (US). BRODEN, David, A.; 8300 Halstead Drive, Minnetrista, MN 55364 (US). SUNDET, Paul, C.; 15390 - 18th Avenue North #110, Plymouth, MN 55447 (US). (74) Agents: CHAMPLIN, Judson, K. et al.; Westman, Champlin & Kelly, Suite 1600 - International Centre, 900 Second Avenue South, Minneapolis, MN 55402-3319 (US).	(81) Designated States: BR, CA, CN, JP, SG European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE). Published <i>With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i>	

(54) Title: MANIFOLD FOR USE WITH A PRESSURE TRANSMITTER

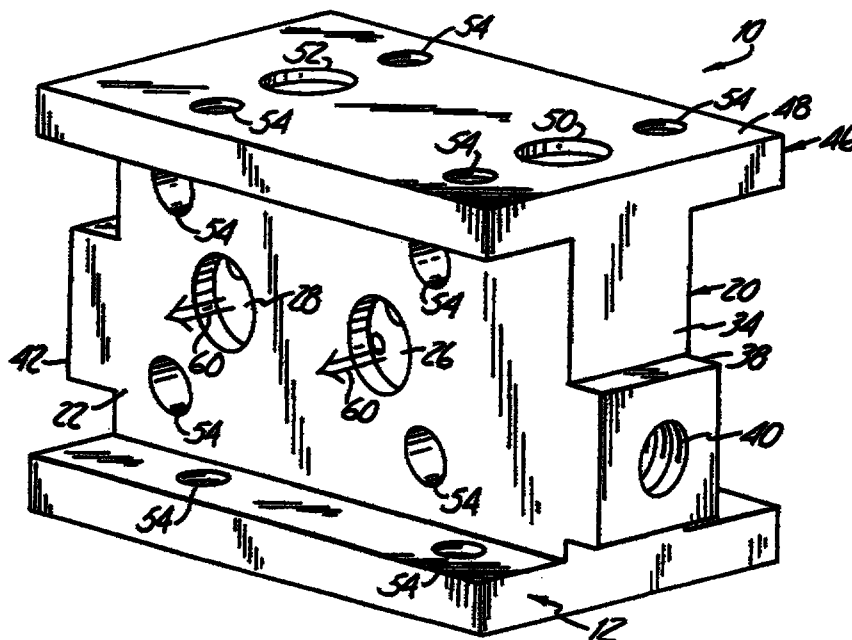

(57) Abstract

A manifold (10) includes a body having generally planar inlet surface (14). The inlet surface (14) includes a first inlet (16) and a second inlet (18) adapted for coupling to a pressurized process fluid. An outlet surface (22) on the manifold (10) is adapted for coupling to a co-planar transmitter and is at angle relative to the inlet surface (14). The manifold (10) includes an equalizing valve surface (24) opposite the outlet surface (22), and a perimeter therebetween. The outlet surface (22) includes first and second outlets (26, 28) in fluid communication with the first and second inlets (16, 18), respectively.