

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
28 October 2004 (28.10.2004)

PCT

(10) International Publication Number
WO 2004/093087 A1

(51) International Patent Classification⁷: **G11C 11/15**, 11/16

(21) International Application Number:
PCT/SG2003/000088

(22) International Filing Date: 16 April 2003 (16.04.2003)

(25) Filing Language: English

(26) Publication Language: English

(71) Applicant (for all designated States except US): **AGENCY FOR SCIENCE, TECHNOLOGY AND RESEARCH** [SG/SG]; 10 Science Park Road, #01/01-03 The Alpha, Singapore Science Park II, 117684 SG (SG).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **ZHENG, Yuankai** [CN/SG]; Block 24, Teban Gardens Road, #09-168, 600024 SG (SG). **WU, Yihong** [SG/SG]; Block 10, Dover Rise, #17-09, 138680 SG (SG).

(74) Agent: **ALLEN & GLEDHILL**; 36 Robinson Road, #18-01 City House, 068877 SG (SG).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

- with international search report
- with amended claims

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: MAGNETIC MEMORY DEVICE

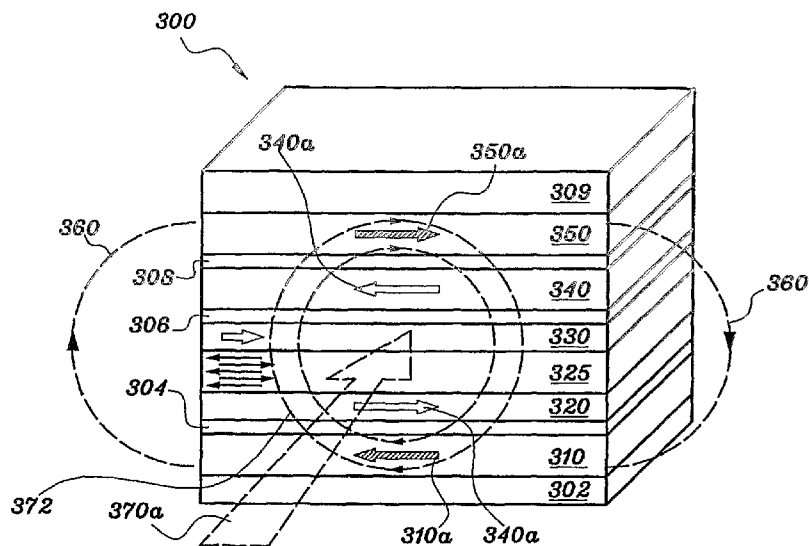

(57) Abstract: A memory cell for a magnetic memory device comprising a first hard magnetic later having a first fixed magnetization vector; a second hard magnetic later having a second fixed magnetization vector; a first soft magnetic layer having a first alterable magnetization vector and disposed adjacent to the first hard magnetic layer and a second soft magnetic layer having a second alterable magnetization vector and disposed adjacent to the second hard magnetic layer, the first and the second soft magnetic layers are magnetostatically coupled antiparallel to each other to form a flux-closed structure. An electrically conductive layer is disposed between the two soft magnetic layers for passing an electric current therethrough to perform the read and write operations. A magnetic memory device made thereof possesses a higher thermal stability against external thermal fluctuations and in the meantime has a lower power dissipation in writing operations.

WO 2004/093087 A1