

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
1 February 2007 (01.02.2007)

PCT

(10) International Publication Number
WO 2007/013812 A1

(51) International Patent Classification:

B66D 1/72 (2006.01) **F16H 55/30** (2006.01)
B63B 21/16 (2006.01)

(21) International Application Number:

PCT/NO2006/000242

(22) International Filing Date: 26 June 2006 (26.06.2006)

(25) Filing Language: Norwegian

(26) Publication Language: English

(30) Priority Data:

20053322 7 July 2005 (07.07.2005) NO

(71) Applicant (for all designated States except US): **I.P. HUSE AS** [NO/NO]; N-6487 Harøy (NO).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **MOLNES, Kjetil** [NO/NO]; N-6487 Harøy (NO).

(74) Agent: **ACAPO AS**; P.O. Box 1880, Nordnes, N-5817 Bergen (NO).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LV, LY, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.


(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

[Continued on next page]

(54) Title: DEVICE FOR TRANSPORTING CHAINS

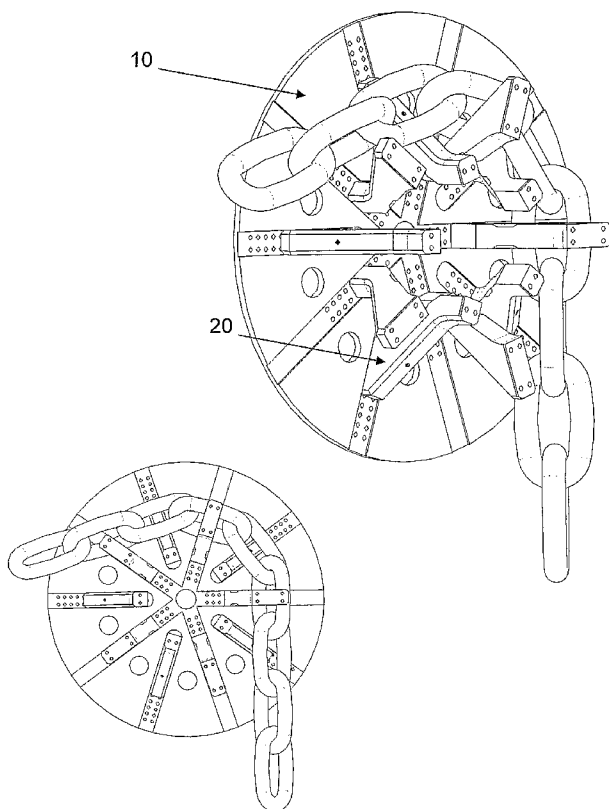

(57) Abstract: A device is described for transport of chain lengths of varying link sizes, where the device comprises at least a first side plate for fastening on a shaft, and at least four catching arms arranged on the first side plate in a radial pattern, where each catching arm is arranged at an angle of about 90 degrees in relation to the next catching arm.



For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.