

DESCRIPTION

PLANT COMPONENT-CONTAINING POLYCARBONATE RESIN

COMPOSITION

5

Technical Field

10

The present invention relates to a plant component-containing resin composition with improved heat resistance. More specifically, it relates to a resin composition comprising a plant component-containing polycarbonate and a polylactic acid composed of a poly-L-lactic acid component and a poly-D-lactic acid component, which resin composition exhibits an improved deflection temperature under load.

15

Background Art

20

Polycarbonate resins are now widely employed in electrical and electronic fields, automobile fields, optical part fields and other industrial fields because of their excellent transparency, heat resistance and impact resistance. However, since the commonly used aromatic polycarbonate resins are produced using starting materials obtained from petroleum resources, they are not preferred in light of modern concerns over depletion of petroleum resources and global warming due to carbon dioxide generated by thermal disposal of waste, and hence more environmentally friendly and easily recyclable materials are desired.

25

30

Research is being conducted on polycarbonates composed of plant-derived starting materials, as a means of overcoming such problems (for example, Patent

document 1). The use of polycarbonates from plant-derived starting materials exclusively, however, has not resulted in sufficient heat resistance and especially deflection temperature under load for practical use in the fields mentioned above, and improvement in heat resistance has therefore been desired. Polylactic acid has been a subject of interest in recent years as an alternative plastic from plant-derived starting materials. Polylactic acid is biodegradable and therefore environmentally friendly, while it also has relatively high heat resistance and excellent mechanical strength and transparency among biodegradable plastics, for which reasons it has found a wide variety of uses.

Resin compositions composed of polylactic acid and polycarbonate are under investigation and have demonstrated effects of improved polycarbonate resin flow properties and improved impact resistance and heat resistance of polylactic acid (for example, Patent documents 2-5 and others). However, the polycarbonates used in such cases are all aromatic polycarbonates made of petroleum components, and despite the use of polylactic acid, it cannot be said that the goal of achieving reduced environmental load by plastics has been satisfactorily achieved.

[Patent document 1] International Patent Publication No. 2004/111106

[Patent document 2] Japanese Unexamined Patent Publication No. 2005-48067


[Patent document 3] Japanese Unexamined Patent Publication HEI No. 7-109413

[Patent document 4] Japanese Unexamined Patent
Publication HEI No. 11-140292

[Patent document 5] Japanese Unexamined Patent
Publication No. 2004-250549

5
Summary

It is an aim of the present disclosure to solve
the aforementioned problems of the prior art by
providing a resin composition comprising two
10 components, namely a polycarbonate resin containing a
plant-derived component as a polymerizing unit and a
polylactic acid composed of a L-lactic acid component
and D-lactic acid component, the polycarbonate resin of
which has improved heat resistance, and this aim of the
15 disclosure is achieved by a resin composition
comprising 100 parts by weight of a polycarbonate
(component A) which contains an ether diol residue
represented by the following formula (1):

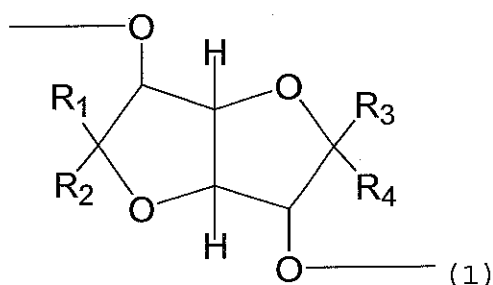


20 (wherein R₁-R₄ each independently represent hydrogen,
alkyl, cycloalkyl or aryl),
the ether diol residue represented by formula (1)
constituting 40-100 mol% of the total diol residues in
the polycarbonate, and 1-40 parts by weight of
25 polylactic acid (component B), wherein the polylactic
acid (component B) is composed of a poly-L-lactic acid
component (component B-1) and a poly-D-lactic acid

component (component B-2), and wherein in the melting peak derived from the polylactic acid component during temperature increase for measurement with a differential scanning calorimeter (DSC), the proportion of the melting peak area for 195°C and above is at least 60% of the sum of the melting peak area for 195°C and above (high temperature) and the melting peak area for 140-180°C (low temperature), as determined by measurement of the melting peak derived from the polylactic acid component during temperature increase with a differential scanning calorimeter (DSC).

Best Mode for Carrying Out the Invention

Modes for carrying out the invention will now be explained in detail. The following examples and their explanation serve only as illustration of the invention and do not restrict the scope of the invention in any way. Other modes that fall within the gist of the invention are, of course, encompassed within the scope of the invention.

The resin composition of the invention is a resin composition comprising 100 parts by weight of a polycarbonate (component A) which contains an ether diol residue represented by the following formula (1):

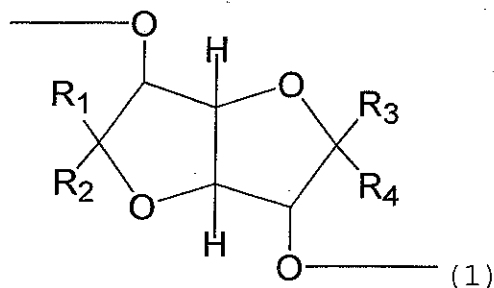

(wherein R₁-R₄ each independently represent hydrogen, alkyl, cycloalkyl or aryl),

the ether diol represented by formula (1) constituting 40-100 mol% of the total diol residues in the polycarbonate, and 1-40 parts by weight of polylactic acid (component B), wherein the polylactic acid

5 (component B) is composed of a poly-L-lactic acid component (component B-1) and a poly-D-lactic acid component (component B-2), and wherein in the melting peak derived from the polylactic acid component during temperature increase for measurement with a
10 differential scanning calorimeter (DSC), the proportion of the melting peak area for 195°C and above is at least 60% of the sum of the melting peak area for 195°C and above (high temperature) and the melting peak area for 140-180°C (low temperature), as determined by
15 measurement of the melting peak derived from the polylactic acid component during temperature increase with a differential scanning calorimeter (DSC).

In formula (1) above, R₁-R₄ preferably each independently represent hydrogen, constitutive C1-12
20 alkyl, constitutive C1-12 cycloalkyl or constitutive C6-12 aryl, and most preferably all of R₁-R₄ represent hydrogen.

If the weight ratio of component B with respect to component A is below the range specified above, the
25 melt viscosity of the resin composition will be increased and the moldability will be poor. If the weight ratio is larger than the range specified above, no effect of improved heat resistance will be achieved. The polylactic acid is preferably 5-30 parts by weight
30 with respect to 100 parts by weight of the polycarbonate.

According to the invention, the ether diol residue represented by formula (1) is in the range of 40-100 mol% of the total diol residues in the polycarbonate. If the proportion of ether diol residue represented by formula (1) is below this range, the glass transition temperature of the obtained resin will be low, resulting in poor heat resistance. The proportion of ether diol residue represented by formula (1) is preferably at least 60 mol% and no greater than 90 mol% of the total diol residues.

The polycarbonate preferably has a reduced viscosity of 0.40 dl/g or greater, more preferably 0.50 dl/g or greater, and even more preferably 0.60 dl/g or greater. A satisfactory melt flow property and adequate mechanical strength are exhibited within this range. From the standpoint of moldability, it is preferably no greater than 1.0 dl/g and even more preferably no greater than 0.80 dl/g.


The reduced viscosity can be easily controlled by the polymerization catalyst, polymerization reaction time, polymerization reaction temperature and starting material charging ratio.

The glass transition temperature of the polycarbonate used for the invention is preferably 90°C or higher and more preferably 100°C or higher. A glass transition temperature of below 90°C may make it impossible to achieve sufficiently practical heat resistance and moldability.

The T_g can also be easily controlled by the polymerization catalyst, polymerization reaction time, polymerization reaction temperature, starting material

charging ratio, and proportion of ether diol residue represented by formula (1) among the total diol residues in the polycarbonate.

5 The diol residue in the polycarbonate preferably further includes a diol residue represented by the following formula (2):




10 (at least one diol residue wherein R₅ is a group selected from among C2-12 aliphatic hydrocarbon and alicyclic groups). The diol residue is preferably 0-60 mol% and more preferably 10-40 mol% of the total diol residues.

15 The diol source of the diol residue in formula (2) above, i.e. the diol component represented by HO-R₅-OH, may be ethylene glycol, 1,3-propanediol, 1,4-butanediol, 1,5-pentanediol, 1,6-hexanediol, 1,4-cyclohexanediol, 1,4-cyclohexanedimethanol or the like, and such diol components may also be used in combinations of at least two or more. Preferred among
20 these are 1,3-propanediol, 1,4-butanediol and 1,6-hexanediol from the standpoint of a higher polymerization degree during synthesis of the polymer and, as well as a high glass transition point in terms of the physical properties of the polymer, while 1,3-propanediol is more preferred since processes for its
25 production from plants exist. The diol component may also include diol components other than ether diols and aliphatic diols. As other diol components there may be mentioned alicyclic alkylenediols such as
30 cyclohexanediol and cyclohexanedimethanol, aromatic diols such as dimethanolbenzene and diethanolbenzene,



and bisphenols.

The aliphatic diol used for the invention is preferably purified by simple distillation, rectification or recrystallization.

5 The ether diol of the ether diol residue represented by formula (1) above may be, specifically, isosorbide, isomannide or isoidide represented by the following formula (3), (4) or (5):



10



15

These saccharide-derived ether diols are substances obtained from natural biomass, and are renewable sources. Isosorbide can be obtained by adding hydrogen to D-glucose from starch and then subjecting it to dehydration. Other ether diols can also be obtained by similar reactions with different starting materials.

20

Particularly preferred is a polycarbonate containing an isosorbide residue as the ether diol residue represented by formula (1). Isosorbide is an ether diol that is easily produced from starch as an

abundantly available source, while it is easier to produce than isomannide or isoidide and exhibits superior properties and versatility of use. Isosorbide residues preferably constitute 60-100 wt% of the ether diol residues represented by formula (1).

There are no particular restrictions on the molecular weight of the polylactic acid used for the invention, but it is preferably 50,000 or greater, more preferably 80,000 or greater and even more preferably 100,000 or greater. The upper limit is preferably 300,000. A satisfactory melt flow property and adequate mechanical strength are exhibited within this range.

There are also no particular restrictions on the glass transition temperature of the polylactic acid, but it is preferably 40°C or higher and more preferably 50°C or higher. Within this range, sufficient heat resistance will be exhibited for use at room temperature. The upper limit for the glass transition temperature is preferably 70°C.

The polylactic acid (component B) in the resin composition of the invention consists of component B-1 which is a polylactic acid composed mainly of an L-lactic acid unit, and component B-2 which is a polylactic acid composed mainly of a D-lactic acid unit.

Component B-1 is a polylactic acid composed mainly of an L-lactic acid unit, with D-lactic acid and/or a copolymerizing component unit other than lactic acid.

Component B-2 is a polylactic acid composed mainly of a D-lactic acid unit, with L-lactic acid and/or a copolymerizing component unit other than lactic acid.

The weight ratio of component B-1 and component B-2 in component B of the resin composition of the invention (component B-1/component B-2) is preferably 10/90-90/10, and for an increased effect of improved heat resistance it is more preferably 25/75-75/25 and even more preferably 40/60-60/40. If the weight ratio of one polymer is less than 10 or greater than 90, the heat resistance improving effect will not be satisfactorily exhibited.

The polylactic acid component in the polylactic acid (component B) may be copolymerized with a component other than lactic acid so long as the object of the invention is not prevented, and as copolymerizing component units other than lactic acid there may be used, either alone or in mixtures, units derived from dicarboxylic acids, polyhydric alcohols, hydroxycarboxylic acids and lactones with two or more ester bond-forming functional groups, as well as units derived from various polyesters, polyethers or polycarbonates composed thereof as constituent components.

As dicarboxylic acids there may be mentioned succinic acid, adipic acid, azelaic acid, sebacic acid, terephthalic acid and isophthalic acid. As polyhydric alcohols there may be mentioned aliphatic polyhydric alcohols such as ethylene glycol, propylene glycol, butanediol, pentanediol, hexanediol, octanediol, glycerin, sorbitan, neopentyl glycol, diethylene glycol, triethylene glycol, polyethylene glycol and polypropylene glycol, or aromatic polyhydric alcohols such as addition product of ethylene oxide to

bisphenol. As hydroxycarboxylic acids there may be mentioned glycolic acid, hydroxybutylcarboxylic acid and the like. As lactones there may be mentioned glycolide, ϵ -caprolactone glycolide, ϵ -caprolactone, β -propiolactone, δ -butyrolactone, β - or γ -butyrolactone, pivalolactone, δ -valerolactone and the like.

The polylactic acid components (components B-1 and B-2) of the polylactic acid (component B) in the resin composition of the invention may be produced by any known polymerization process for polylactic acid, and for example, they may be produced by a process of ring-opening polymerization of lactides, dehydrating condensation of lactic acids or combinations thereof with solid-phase polymerization.

When the polylactic acid components (components B-1 and B-2) are produced by a desired known polymerization process, lactides that form as cyclic dimers of lactic acid may be produced as by-products. The polylactic acid components may also contain such lactides so long as they do not impair the thermostability of the resin.

The lactides in the polylactic acid components may be removed from the polylactic acid components after polymerization of each polylactic acid component is complete by a method of removal by melting under reduced pressure or a method of extraction removal using a solvent, and this is preferred in order to improve the thermostability of the resin. Lactides are preferably present in each polylactic acid component at no greater than 2 wt%, more preferably no greater than 1 wt% and even more preferably no greater than 0.5 wt%

with respect to each polylactic acid component.

As copolymerizing component units other than lactic acid used in the polylactic acids (components B-1 and B-2) of the polylactic acid (component B) there may be mentioned dicarboxylic acids, polyhydric alcohols, hydroxycarboxylic acids and lactones with two or more ester bond-forming functional groups, as well as various polyesters, polyethers or polycarbonates composed thereof as constituent components.

The polylactic acid components (components B-1 and B-2) of the polylactic acid (component B) may also contain a polymerization catalyst so long as the thermostability of the resin is not impaired. As such catalysts there may be mentioned various tin compounds, aluminum compounds, titanium compounds, zirconium compounds, calcium compounds, organic acids and inorganic acids. Such catalysts may be fatty acid salts, carbonic acid salts, sulfuric acid salts, phosphoric acid salts, oxides, hydroxides, halides or alcoholates of tin, aluminum, zirconium or titanium, or they may be the metals themselves. Specifically, there may be mentioned tin octylate, aluminum acetylacetonate, aluminum alkoxides, titanium alkoxides and zirconium alkoxides.

The polymerization catalyst in the polylactic acid components (components B-1 and B-2) may be removed or inactivated after completion of the polymerization reaction for each polylactic acid component, by a method of extraction removal using a solvent or a method of adding a known stabilizer to inactivate the catalyst, and this is preferred in order to improve the

thermostability of the resin.

For differential scanning calorimeter (DSC) measurement of the resin composition obtained according to the invention, two different melting peaks are measured in regions of 140-180°C and $\geq 195^\circ\text{C}$ during temperature increase. The polycarbonate component in the resin composition is amorphous and exhibits no melting peak, and therefore the two melting peaks are assigned to the polylactic acids. The proportion of melting peaks at $\geq 195^\circ\text{C}$ among the peaks is preferably 60% or greater. If the proportion is less than 60%, the effect of improved heat resistance will not be adequately achieved. The proportion is more preferably 70% or greater and even more preferably 80% or greater.

The resin composition of the invention preferably has a deflection temperature under load of above 85°C with a load of 1.80 MPa, when the deflection temperature under load of the resin composition is measured according to ISO75-1 and ISO75-2 using a test strip with a thickness of 3 mm, a width of 12 mm and a length of 120 mm. A lower deflection temperature under load will undesirably result in insufficient heat resistance for various purposes.

The resin composition of the invention may be used alone, or it may be combined with another thermoplastic resin (for example, a polyalkylene terephthalate resin, polyallylate resin, liquid crystalline polyester resin, polyamide resin, polyimide resin, polyetherimide resin, polyurethane resin, silicone resin, polyphenylene ether resin, polyphenylene sulfide resin, polysulfone resin, or polyolefin resin such as polyethylene or

polypropylene), a filler (glass fibers, carbon fibers, natural fibers, organic fibers, ceramic fibers, ceramic beads, talc, clay or mica), an antioxidant (a hindered phenol-based compound, sulfur-based antioxidant or the like), a flame-retardant additive (phosphorus-based or bromo-based), an ultraviolet absorber (benzotriazole-based, benzophenone-based or cyanoacrylate-based), or a flow modifier, coloring agent, light diffusion agent, infrared absorber, organic pigment, inorganic pigment, release agent, plasticizer or the like, in ranges that do not interfere with the object of the invention.

The resin composition of the invention may be used after working into any of various molded articles (injection molded article, extrusion molded article, blow molded article, film, fibers, sheet or the like) by a method such as injection molding, extrusion molding or blow molding.

EXAMPLES

The present invention will now be explained in more specific detail through the following examples, with the understanding that the invention is in no way limited thereby.

The polycarbonate component (component A) (hereinafter also abbreviated as "Bio-PC") and polylactic acid component (component B) were produced by the methods indicated in the production examples described below. The values in the examples were determined by the following methods.

(1) Reduced viscosity: The 35°C viscosity of a solution obtained by dissolving 120 mg of polycarbonate in 10 ml

of a phenol/tetrachloroethane (volume ratio: 50/50) mixed solvent was measured using an Ubbelohde viscometer. The units were dl (deciliters)/g.

(2) Weight-average molecular weight: The weight-average molecular weight of the polylactic acid was determined by gel permeation chromatography (GPC) based on polystyrene.

(3) Glass transition temperature and proportion of $\geq 195^{\circ}\text{C}$ melting peak assigned to polylactic acid ($R_{\geq 195}$): A DSC2920 by TA instruments was used for measurement under a nitrogen atmosphere with a temperature-elevating rate of $20^{\circ}\text{C}/\text{min}$. $R_{\geq 195}$ was calculated by the following formula based on the $\geq 195^{\circ}\text{C}$ (high temperature) melting peak area and $140\text{--}180^{\circ}\text{C}$ (low temperature) melting peak area from the results of DSC measurement of the injection molded article obtained in each of the examples described below.

$$R_{\geq 195} (\%) = A_{\geq 195} / (A_{\geq 195} + A_{140-180}) \times 100$$

$R_{\geq 195}$: Proportion of $\geq 195^{\circ}\text{C}$ melting peak

$A_{\geq 195}$: $\geq 195^{\circ}\text{C}$ melting peak area

$A_{140-180}$: $140\text{--}180^{\circ}\text{C}$ melting peak area

(4) Deflection temperature under load: A test strip with a thickness of 3 mm, a width of 12 mm and a length of 120 mm obtained by injection molding was measured according to ISO75-1 and ISO75-2 under a 1.80 MPa load.

(5) Plant-derived component-containing weight ratio (wt%): The plant-derived component weight ratio was determined as the plant-derived component-containing weight ratio (wt%) in the resin composition according to the following formula based on each content, with the plant-derived component-containing weight ratio

(wt%) for BioPC as 82% (calculated by the formula shown below), the plant-derived component-containing weight ratio (wt%) for scPLA as 100% and the plant-derived component-containing weight ratio (wt%) for ordinary polycarbonate composed of bisphenol A as zero.

Plant-derived component-containing weight ratio (wt%) in BioPC =

$$100 \times \left(\frac{\text{Isosorbide unit molecular weight} \times A + 1,3\text{-propanediol unit molecular weight} \times B}{\text{Isosorbide molecular weight} \times A + 1,3\text{-propanediol molecular weight} \times B} \right) = \frac{144 \times A + 74 \times B}{172 \times A + 102 \times B} \times 100$$

In the formula, "isosorbide unit" means a unit of isosorbide without the carbonyl group, and "1,3-propanediol unit" means a unit of 1,3-propanediol without the carbonyl group.

Also, "A" means the molar ratio of isosorbide units in the resin (= 0.75), and "B" means the molar ratio of 1,3-propanediol units in the resin (= 0.25).

Plant-derived component-containing weight ratio (wt%) in resin composition =

$$82 \times C + 100 \times D + 0 \times E$$

In this formula, "C" means the weight ratio of BioPC in the resin composition, "D" means the weight ratio of scPLA in the resin composition and "E" means the weight ratio of ordinary polycarbonate composed of bisphenol A.

Production Example 1: Production of polycarbonate component (Bio-PC) (component A)

After placing isosorbide (20.0 kg, 137 mol), 1,3-

propanediol (4.69 kg, 61.6 mol) and diphenyl carbonate (41.9 kg, 196 mol) in a polymerization tank, 2,2-bis(4-hydroxyphenyl)propane disodium salt (13.3 mg, 4.89×10^{-5} mol) and tetramethylammonium hydroxide (7130 mg, 1.96×10^{-2} mol) were added as polymerization catalysts and the mixture was melted under a nitrogen atmosphere at 180°C. The pressure was then reduced and the temperature increased while stirring, and the interior of the reaction tank was brought to 66.67 Pa (0.5 mmHg), 245°C while distilling off the produced phenol. The obtained polycarbonate is herein abbreviated as "Bio-PC".

The reduced viscosity of the Bio-PC was 0.59-0.63, and the glass transition point as measured by DSC was 121-122°C.

Production Example 2: Production of poly-L-lactic acid component (component B-1)

After adding 48.75 parts by weight of L-lactide (product of Musashino Chemical Laboratory, Co. Ltd.) and 1.25 parts by weight of D-lactide (product of Musashino Chemical Laboratory, Co. Ltd.) in a polymerization tank, the system interior was substituted with nitrogen, and then 0.05 part by weight of stearyl alcohol and 25×10^{-3} parts by weight of tin octylate as a catalyst were added and polymerization was conducted at 190°C, 2 hours to produce a polymer. The polymer was washed with a 7% 5N hydrochloric acid-containing acetone solution to remove the catalyst and obtain a poly-L-lactic acid component (PLLA, component B-1). The weight-average molecular weight of the

obtained PLLA (component B-1) was 118,200. The melting point (T_m) was 159°C. The crystallization point (T_c) was 120°C.

5 Production Example 3: Production of poly-D-lactic acid component (component B-2)

10 After adding 1.25 parts by weight of L-lactide (product of Musashino Chemical Laboratory, Co. Ltd.) and 48.75 parts by weight of D-lactide (product of Musashino Chemical Laboratory, Co. Ltd.) in a polymerization tank, the system interior was substituted with nitrogen, and then 0.05 part by weight of stearyl alcohol and 25×10^{-3} parts by weight of tin octylate as a catalyst were added and polymerization was conducted at 190°C, 2 hours to produce a polymer. The polymer was washed with a 7% 5N hydrochloric acid-containing acetone solution to remove the catalyst and obtain a poly-D-lactic acid component (PDLA, component B-2). The weight-average molecular weight of the obtained PDLA (component B-2) was 130,700. The melting point (T_m) was 156°C. The crystallization point (T_c) was 120°C.

25 Example 1

30 A dry pelleted blend of 5.5 parts by weight of (component B-1) and 5.5 parts by weight of (component B-2) with respect to 100 parts by weight of (component A) was used for injection molding with an injection molding machine (PS20E2A injection molding machine by Nissei Plastic Industrial Co., Ltd.) at a cylinder temperature of 240°C, a mold temperature of 40°C, an

injection time of 4 seconds and a cooling time of 30 seconds to produce a molded article with a thickness of 3 mm, a width of 12 mm and a length of 120 mm, and the deflection temperature under load was measured (weight ratio: Bio-PC/PLLA/PDLA = 90/5/5). The results are shown in Table 1.

Example 2

A molded article was produced by the same procedure as in Example 1 except for combining 12.5 parts by weight each of (component B-1) and (component B-2) with respect to 100 parts by weight of (component A), and the deflection temperature under load was measured (weight ratio: Bio-PC/PLLA/PDLA = 80/10/10). The results are shown in Table 1.

Comparative Example 1

A molded article was produced by the same procedure as in Example 1 except for combining 21.5 parts by weight each of (component B-1) and (component B-2) with respect to 100 parts by weight of (component A), and the deflection temperature under load was measured (weight ratio: Bio-PC/PLLA/PDLA = 70/15/15). The results are shown in Table 1.

Comparative Example 2

A molded article with a thickness of 3 mm, a width of 12 mm and a length of 120 mm was produced by injection molding of 100 parts by weight of (component A) with a cylinder temperature of 230°C and a mold temperature of 50°C, and the deflection temperature

under load was measured. The results are shown in Table 1.

Reference Example 1

5 A molded article was produced by the same procedure as in Example 1 except for combining 12.5 parts by weight each of (component B-1) and (component B-2) with respect to 100 parts by weight of an ordinary type of polycarbonate composed of bisphenol A (PC,
10 PANLITE L-1250 by Teijin Chemicals, Ltd.) and setting the mold temperature during molding to 80°C, and the deflection temperature under load was measured (weight ratio: PC/PLLA/PDLA = 80/10/10). The results are shown in Table 1.

Reference Example 2

15 A molded article was produced by the same procedure as in Example 1 except for using an ordinary type of polycarbonate composed of bisphenol A (PC,
20 PANLITE L-1250 by Teijin Chemicals, Ltd.), a cylinder temperature of 280°C and a mold temperature of 80°C, and the deflection temperature under load was measured. The results are shown in Table 1.


25 As seen in Table 1, the resin compositions of the invention composed of Bio-PC and polylactic acid had a drastically improved deflection temperature under load of at least 10°C higher than with Bio-PC alone, without reduction in the plant-derived component-containing weight ratio.

Table 1

		Example 1	Example 2	Comparative Example 1	Comparative Example 2	Reference Example 1	Reference Example 2
Component A	Bio-PC [wt%]	90	80	70	100	-	-
Component B	Polylactic acid	5	10	15	-	10	-
		5	10	15	-	10	-
PC [wt%]		-	-	-	-	80	100
R ₂₁₉₅ °C [%]		100	82	88	-	76	-
Deflection temperature under load [°C]		101	96	83	85	114	130
Plant-derived component-containing weight ratio (wt%)		83.8	85.6	87.4	82	20	0

What is claimed is:

1. A resin composition comprising 100 parts by weight of a polycarbonate (component A) containing an ether diol residue represented by the following formula (1):

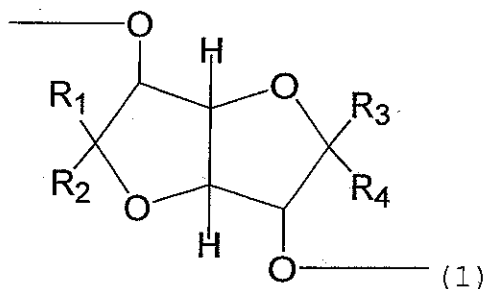

(wherein R₁-R₄ each independently represent hydrogen, alkyl, cycloalkyl or aryl),


the ether diol residue represented by formula (1) constituting 40-100 mol% of the total diol residues in the polycarbonate, and 1-40 parts by weight of polylactic acid (component B), wherein the polylactic acid (component B) is composed of a poly-L-lactic acid component (component B-1) and a poly-D-lactic acid component (component B-2), and wherein in the melting peak derived from the polylactic acid component during temperature increase for measurement with a differential scanning calorimeter (DSC), the proportion of the melting peak area for 195°C and above is at least 60% of the sum of the melting peak area for 195°C and above (high temperature) and the melting peak area for 140-180°C (low temperature), as determined by measurement of the melting peak derived from the polylactic acid component during temperature increase with a differential scanning calorimeter (DSC).

2. A resin composition according to claim 1,

wherein the weight ratio of the poly-L-lactic acid component (component B-1) and the poly-D-lactic acid component (component B-2) in component B (component B-1/component B-2) is 10/90-90/10.

5 3. A resin composition according to claim 1 or 2, wherein the deflection temperature under load of the resin composition as measured according to ISO75-1 and ISO75-2 with a test strip of 3 mm thickness, 12 mm width and 120 mm length is higher than 85°C under a
10 load of 1.80 MPa.

4. A resin composition according to any one of claims 1 to 3, which further includes, as a diol residue in the polycarbonate (component A), a diol residue represented by the following formula (2):



(at least one diol residue wherein R₅ is a group selected from among C2-12 aliphatic hydrocarbon and alicyclic hydrocarbon groups).

20 5. A resin composition according to claim 4, wherein the diol residue of formula (2) is a 1,3-propanediol residue.

25 6. A resin composition according to any one of claims 1 to 5, which further comprises an isosorbide residue as the ether diol residue represented by formula (1).