

(51) International Patent Classification:
H04W 16/14 (2009.01)(21) International Application Number:
PCT/EP2010/067523(22) International Filing Date:
16 November 2010 (16.11.2010)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
61/261,777 17 November 2009 (17.11.2009) US
12/773,097 4 May 2010 (04.05.2010) US(71) Applicant (for all designated States except US): **TELEFONAKTIEBOLAGET L M ERICSSON (PUBL)** [SE/SE]; S-164 83 Stockholm (SE).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **WILHELMSSON, Leif** [SE/SE]; Lyftvägen 5, SE-247 55 Dalby (SE). **STATIN, Hans** [SE/SE]; Salongsgatan 64, SE-211 16 Malmö (SE). **CARLBERG, Erik** [SE/SE]; Fridas väg 28, SE-237 48 Bjärred (SE). **MATTISSON, Sven** [SE/SE]; Östanväg 3, SE-237 36 Bjärred (SE).(74) Agent: **ÅKERMAN, Mårten**; Ericsson AB, Nya Vatten-
tornet, S-221 83 Lund (SE).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

[Continued on next page]

(54) Title: METHODS AND APPARATUSES FOR COEXISTENCE OF PLURAL WIRELESS COMMUNICATION TRANSCEIVERS IN CLOSE PROXIMITY

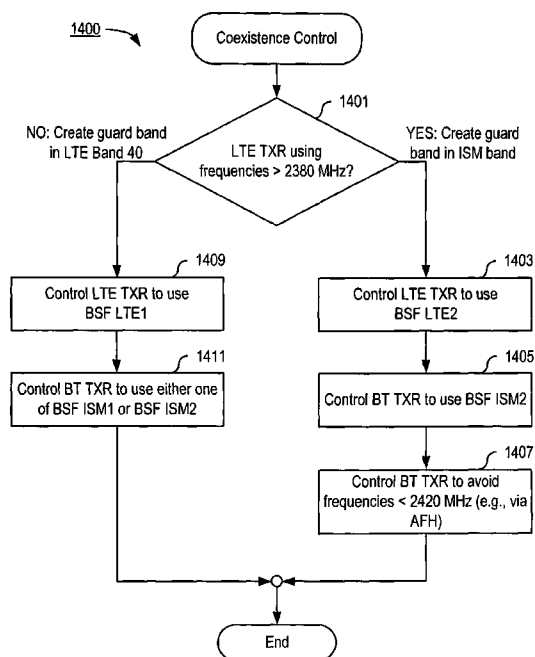


FIG. 14

(57) Abstract: A communication device has a controller operatively connected to at least a first transceiver and a second transceiver, wherein the first transceiver receives signals on one or more channels within a first frequency band and the second transceiver transmits signals on one or more channels within a second frequency band, wherein the first and second frequency bands are adjacent one another so that each of the first and second frequency bands has an adjacent border and a non-adjacent border. Coexistence between the first and second transceivers is achieved by adjusting receive and/or transmit filters associated with the transceivers to create a guard band that is located more in the first frequency band if the second transceiver is using frequencies close to its adjacent border, and a guard band that is more in the second frequency band if the second transceiver is not using frequencies close to its adjacent border.



-
- *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))* (88) **Date of publication of the international search report:**
11 August 2011