

(51) International Patent Classification:
E03D 1/26 (2006.01) *F16B 5/02* (2006.01)(21) International Application Number:
PCT/EP2010/062956(22) International Filing Date:
3 September 2010 (03.09.2010)

(25) Filing Language: English

(26) Publication Language: English

(71) Applicant (for all designated States except US):
ECZACIBASI YAPI GERECLERI SAN. VE TIC. A.S. [TR/TR]; Büyükdere Cad., No:185, Kanyon Ofis Kat:20 Levent, 34394 Istanbul (TR).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **TOPCU, Birol** [TR/TR]; Murat Reis Mahallesi, Topal Sokak, Ali Bey Apt., No:35/6 Usküdar, 34664 Istanbul (TR).(74) Agent: **ÇAYLI, Hülya**; Koza Sokak No: 63/2, GOP, 06540 Ankara (TR).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: WATER TANK INSTALLATION SYSTEM

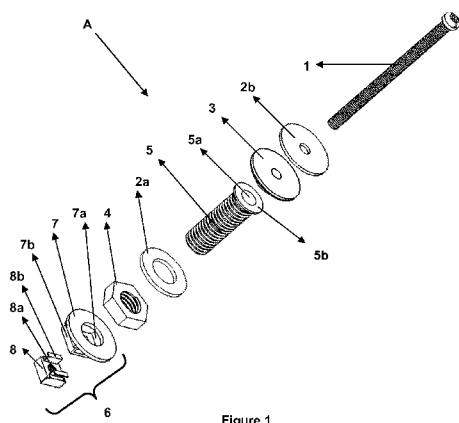


Figure 1

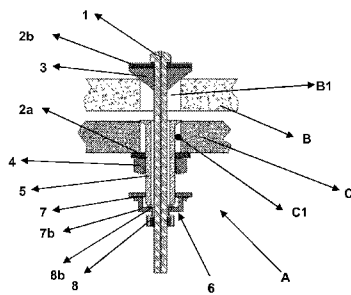


Figure 2

(57) Abstract: The installation system developed by the present invention comprises a guide bolt (5), which is fastened to the toilet bowl (C) and which comprises a slot (5a) which extends throughout the bolt, and a fastening element (4) that secures the said bolt (5). The installation system comprises an installation element (6) comprising a large diameter socket (7a) and a small diameter socket (8a). The installation element (6) is screwed to guide bolt (5) through its large diameter socket (7a). Passing through a hole (B1) on the water tank (B) and a slot (5a), a bolt (1) is screwed into the small diameter socket (8a) of the element (6). The installation system (A) ensures that the water tank (B) is uninstalled from and installed to the toilet bowl (C) without removing the toilet bowl (C) from where it is installed.



Published:

— *with international search report (Art. 21(3))*