



(51) International Patent Classification:
H02G 3/22 (2006.01) *F16L 5/00* (2006.01)

(21) International Application Number:
PCT/SE2009/050059

(22) International Filing Date:
21 January 2009 (21.01.2009)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
0800348-5 15 February 2008 (15.02.2008) SE

(71) Applicant (for all designated States except US): **ROX-TEC AB** [SE/SE]; 540, S-371 23 Karslkrona (SE).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **KARLSSON, Andreas** [SE/SE]; c/o Roxtec International AB, P.O.Box 540, S-371 23 Karslkrona (SE). **MILTON, Stefan** [SE/SE]; Torstävavägen 13, S-373 02 Ramdala (SE).

(74) Agent: **KARLSSON, Leif**; Ström & Gulliksson AB, P.O. Box 4188, S-203 13 Malmö (SE).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: TRANSITION FRAME WITH INTEGRATED COMPRESSION UNIT

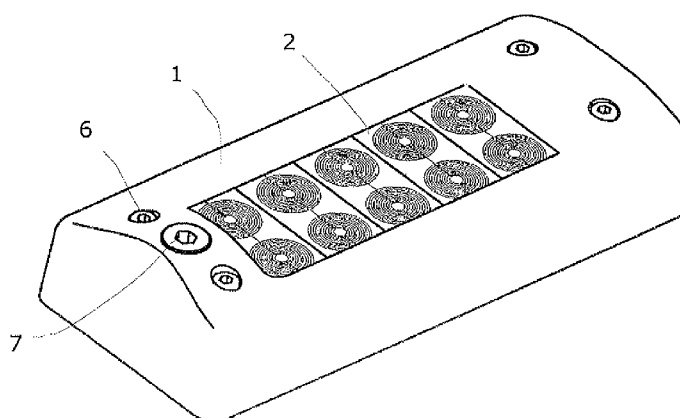


Fig. 1

(57) Abstract: The present invention concerns a frame (1, 12, 19) receiving one or more modules (2, 22) for cable entries or pipe penetrations. A compression unit (8, 23) is an integrated part of the frame (1, 12, 19), which compression unit (8, 23) is to compress the modules (2, 22) inside the frame (1, 12, 19). The compression unit (8, 23) comprises three compression wedges (9-11, 25, 26). An upper and a lower compression wedge (9, 10, 25) have the same orientation, while a middle compression wedge (11, 26) has an opposite orientation. The middle compression wedge (11, 26) is oriented with a broad side (31) facing an opening (3, 13) of the frame (1, 12, 19) receiving the modules (2, 22). At least one compression screw (7, 24) goes through openings (32) of the upper and lower compression wedges (9, 10, 25) and through a slot (34) in the middle compression wedge (11, 26).