



(51) International Patent Classification:
C21B 13/00 (2006.01) **C21C 5/52** (2006.01)

(21) International Application Number:
PCT/AU2009/001018

(22) International Filing Date:
7 August 2009 (07.08.2009)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
2008904040 7 August 2008 (07.08.2008) AU

(71) Applicant (for all designated States except US): **NEW-SOUTH INNOVATIONS PTY LIMITED** [—/AU];
Rupert Myers Building, Gate 14, Barker Street, UNSW,
Sydney, New South Wales 2052 (AU).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **SAHAJWALLA, Veena** [AU/AU]; NewSouth Innovations Pty Limited,
Rupert Myers Building, Gate 14, Barker Street, UNSW,
Sydney, New South Wales 2052 (AU). **O'KANE, Paul**
[AU/AU]; OneSteel NSW Pty Limited, 22 Kellog Road,
Rooty Hill, New South Wales 2766 (AU).

(74) Agent: **GRIFFITH HACK**; Level 29, Northpoint, 100
Miller Street, North Sydney, New South Wales 2060
(AU).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: RECARBURISATION METHOD

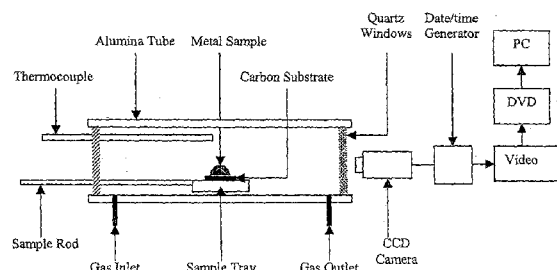


FIG. 3

Figure 3 Schematic of horizontal tube furnace

(57) Abstract: A method for recarburising a molten ferro-alloy in a ladle or ladle furnace comprises the step of adding a carbon-containing polymer to the ladle or furnace. The polymer is adapted to function as a recarburiser of the ferro-alloy. In this regard, the polymer can have a format which, when it contacts the molten ferro-alloy, promotes dissolution of carbon from the polymer into the molten ferro-alloy.